

INCLASS

Distributeur SUISSE



REACTIV OFFICE DESIGN

+41 22 797 05 12

www.rod-design.ch



Aryn

designed by Jonathan Prestwich



ARYN

The collection

ARYN



EN

Designed by Jonathan Prestwich, ARYN is a collection of versatile chairs that easily crosses the boundaries between the different domestic and professional environments. A truly transversal, contemporary, light and fresh design that balances form and function being at the same time fascinating from any perspective. Designed to optimise comfort, ARYN chairs are available with two backrest sizes and with a four legged or sled base frame, both of them stackable. The frames, seats and backrests are available in a wide range of selected timeless colours. For greater comfort, the seats can also be fully upholstered. Its light and timeless design together with its great functionality ensure years of everyday use in a wide range of public and private environments.

ES

Diseñada por Jonathan Prestwich, ARYN es una versátil colección de sillas que fácilmente cruza los límites entre los distintos espacios de uso profesional o domésticos. Un diseño realmente transversal, contemporáneo, ligero y fresco que equilibra forma y función siendo al mismo tiempo fascinante desde cualquier perspectiva. Diseñadas para optimizar el confort, las sillas ARYN están disponibles con base de cuatro patas o de trineo, ambas apilables. Las estructuras, los asientos y los respaldos están disponibles en una amplia gama de colores atemporales. Para un mayor confort, los asientos también cuentan con la posibilidad de ser tapizados. Su diseño ligero y atemporal junto con su alta funcionalidad aseguran años de uso diario en una gran variedad de ambientes tanto públicos como privados.

FR

Conçue par Jonathan Prestwich, ARYN est une collection de chaises polyvalentes qui franchit facilement les frontières entre les espaces domestiques et les espaces professionnels. Un design transversal, contemporain, gracieux et frais qui équilibre la forme et la fonctionnalité tout en fascinant de toutes les perspectives. Conçues pour optimiser le confort, les chaises ARYN sont disponibles avec deux tailles de dossiers, ainsi que des structures à quatre pieds ou des pieds en tige au choix. Les assises et dossiers sont disponibles parmi un large éventail de couleurs en plastique. Pour un meilleur confort, les assises peuvent également être entièrement tapissées. Son design gracieux et intemporel, ainsi que ses fonctionnalités assurent des années d'usage quotidien, dans un grand nombre d'espaces publiques et privés.

DE

ARYN wurde von Jonathan Prestwich entworfen und ist eine vielseitige Kollektion von Stühlen, die leicht die Grenzen zwischen Arbeits- und Privaträumen verschwinden lassen. Ein wahrhaft transversales, zeitgemäßes, leichtes und frisches Design, das Form und Funktion in Einklang bringt und zugleich aus jeder Perspektive faszinierend ist. Zur Optimierung des Komforts entwickelt, sind die ARYN-Stühle mit zwei verschiedenen Rückenlehnengrößen und Vierfuß- oder Kufengestell verfügbar. Beide dieser Varianten sind stapelbar. Die Gestelle, Sitze und Rückenlehnen sind in einer Vielzahl ausgewählter zeitloser Farben erhältlich. Für noch mehr Komfort besteht auch die Möglichkeit die Sitze mit Polsterung zu wählen. Das leichte und zeitlose Design, sowie die hohe Funktionalität gewährleisten einen jahrelangen täglichen Gebrauch in einer Vielzahl von öffentlichen und privaten Umgebungen.



INCLASS



67

ARYN





INCLASS

Overview



4 leg frame
Pie 4 patas



Sled frame
Base trineo



Upholstered seat
Asiento tapizado

Finishes / Acabados

EN

Plastic finishes: available in colours PP1 from the polypropylene swatch card.

Upholstery: available in all the upholstery materials indicated in the finishes book.

Steel frames: in chrome or micro-textured powder coated in colours M1 and M2 from the metallic swatch card.

ES

Acabados de plástico: disponible en todos los colores PP1 del libro de acabados de polipropileno.

Tapicerías: disponible en todos los materiales de tapicería indicados en el libro de acabados.

Estructuras de acero: en cromo o pintura de poliéster termoendurecida con acabado micro-texturizado en los colores M1 y M2 del libro de acabados de metal.

Plastic Colours / Colores de Plástico



***Ecoplas** (100% recycled polypropylene)
Available only for monoshells.



Many of the products of this collection are GREENGUARD Gold certified by UL Solutions.

Gran parte de los productos de esta colección, cuentan con el certificado GREENGUARD Gold de UL Solutions.

Design / Diseño

Designed by Jonathan Prestwich
www.jonathanprestwich.es













INCLASS

ARYN
FINISHES BOOK
Fabrics / Leathers / Materials

SEATS & BACKRESTS

POLYPROPYLENE


PP1 COLOURS

			
B00	B40	B36	B44
			
M56	V74	V16	G42
			
M38	Y62	P70	M82
			
			W01


BASES

STEEL BASES

CHROME




M1 COLOURS



B00



Aluminum




W01

M2 COLOURS



M56



V92



B40



B36



M38



V74



B44



G49



Y62




M44



M82



P70



Rust Brown



Rust Grey



G42

G1 - ASIS

TECHNICAL DATA


- Composition:
100% polyester.
- Light fastness:
5 - 6, ISO 105 B02, Method 2.
- Abrasion:
100.000 Martindale EN ISO 12947-2.
- Resistance to pilling:
4 - 5, ISO 12945-2.
- Rubbing fastness in humid state:
4, ISO 105-X12.
- Rubbing solvents:
4, ISO 105-X12.
- Tear strength:
Warp 140N.
Weft 110N, EN ISO 13937-3.
- Flammability:
EN 1021 - 1/2.
BS 5852 0.
BS 7176 Low Hazard.
CAL TB 117 Section 1.
NFPA 260 Class 1.
Regulation n° 118 UNECE Annexed 6.
IMO MSC.307 (88) Annexed I Part 8.

Width: 140cm
Weight: 335gr/m²




***Batch to batch variations may occur within commercial tolerances.


Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




198




315




88




122




4011




422




77




47




292



86




4




5




26



132



170



108



9

G2 - JORDAN^{NEW}

TECHNICAL DATA

- Composition:**
100% polyester.
- Light fastness:**
5, ISO 105 B02.
- Abrasion:**
100.000 Martindale EN ISO 12947-1, 2.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Fastness to rubbing:**
Wet 5.
Dry 5, ISO 105-X12.
- Tear strength:**
Warp 180, 2N.
Weft 174, 3N, EN ISO 13937-3.
- Seam slippage:**
Warp 1,6N.
Weft 2,0N, EN ISO 13936-2.
- Tensile strength::**
Warp 1257N.
Weft 1189N, EN ISO 13934-1.

Width: ±146cm
Weight: ±360gr/m²



***Batch to batch variations may occur within commercial tolerances.

Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



G2 - NEL ^{NEW}

TECHNICAL DATA

- Composition:**
95% PES, 5% cotton.
- Light fastness:**
5 - 6, UNE 40187 - BS1006-B2.
- Abrasion:**
>38.000 Martindale EN ISO 12947-2.
- Resistance to pilling:**
4 - 5, ISO 12945-1.
- Rubbing fastness in humid state:**
4 - 5, ISO 105-D01.
- Rubbing solvents:**
4 - 5, ISO 105-D01.
- Tear strength:**
Warp 2mm.
Wet 2,1mm, EN ISO 13937-2.
- Characteristics:**
Instalimp® treatment.

Width: ±140cm
Weight: ±445gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

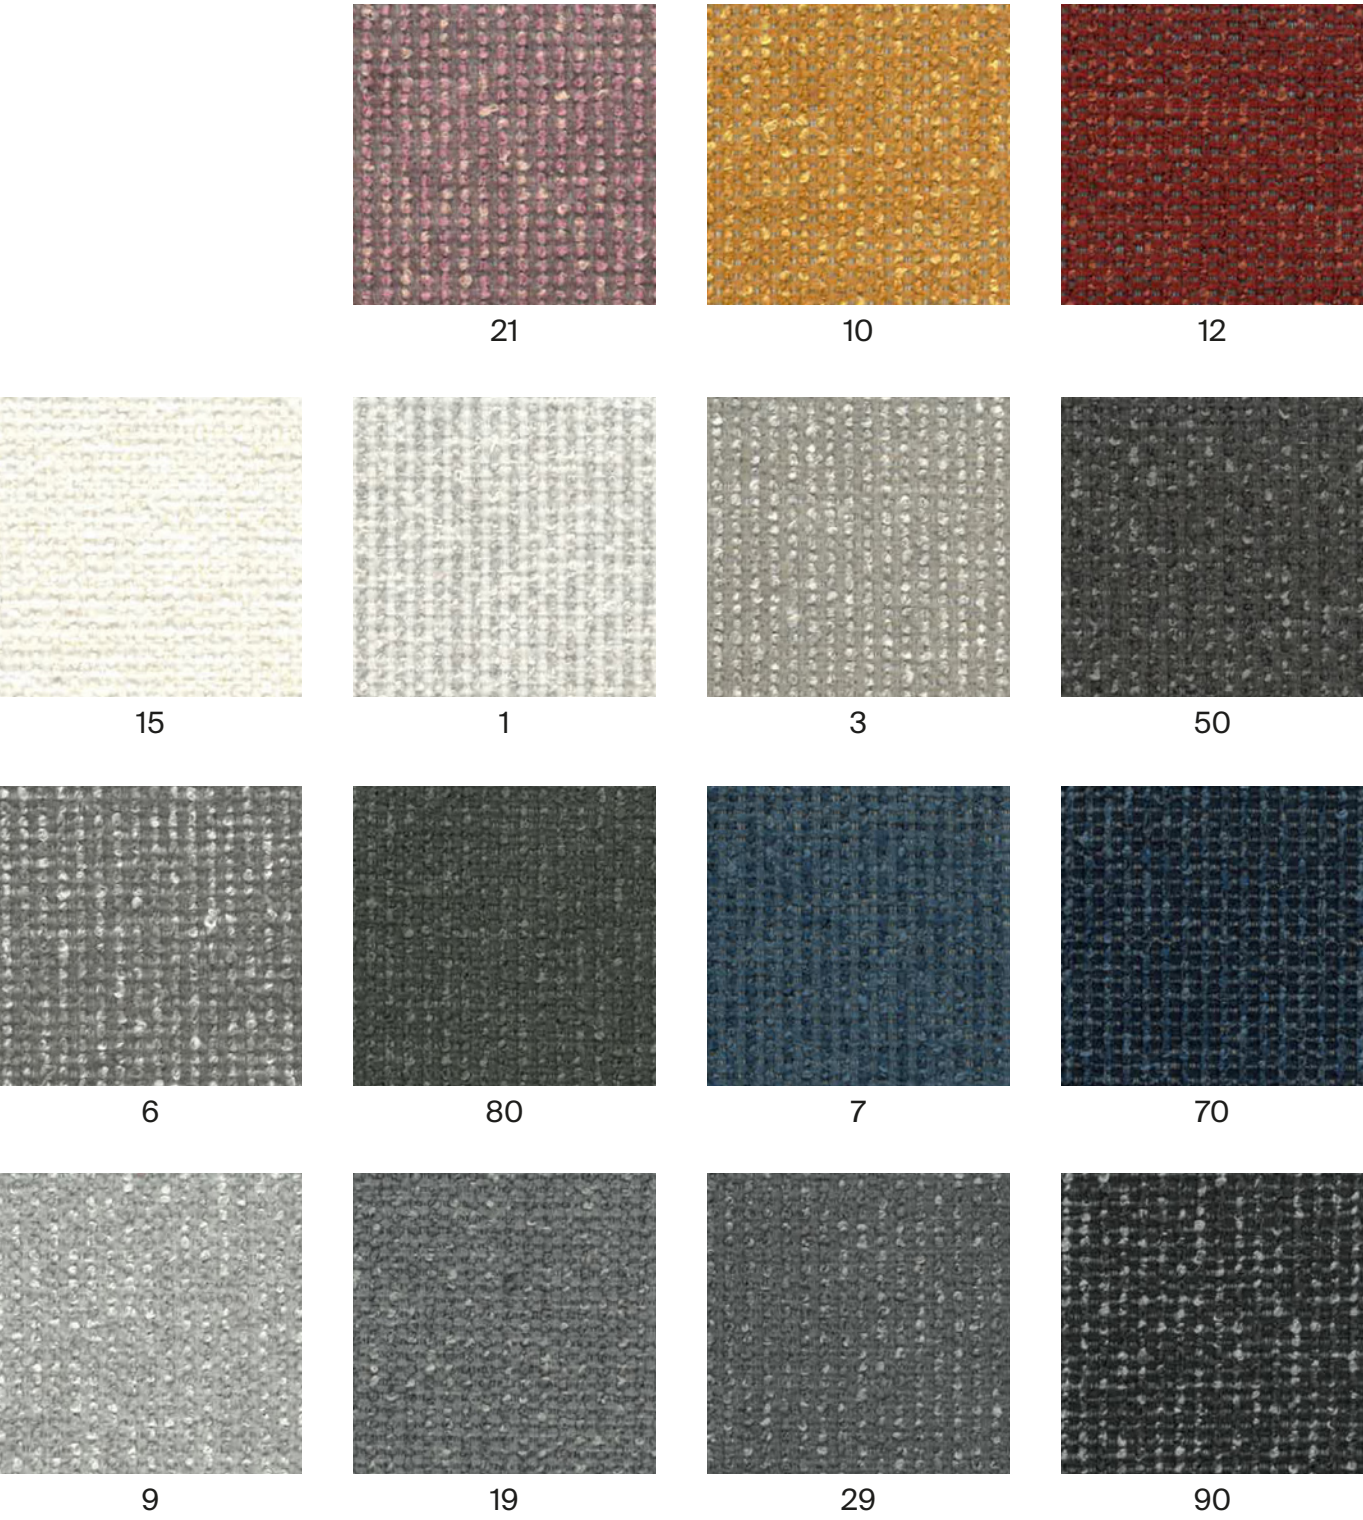

G2 - ARS

TECHNICAL DATA

- Composition:**
100% polyester.
- Light fastness:**
5, ISO 105 B02, Method 2.
- Abrasion:**
90.000 Martindale EN ISO 12947-2.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Rubbing fastness in humid state:**
5, ISO 105-X12.
- Rubbing solvents:**
4 - 5, ISO 105-X12.
- Seam strength:**
Warp 3,7mm.
Weft 4,0mm, EN ISO 13936-2.
- Seam strength:**
Warp 75,6N.
Weft 65,1N, EN ISO 13937-3.
- Flammability:**
EN 1021 - 1 (cigarette).
- Environment:**
OEKO-TEX® Standard 100.

Width: 140cm
Weight: 250gr/m²



***Batch to batch variations may occur within commercial tolerances.




Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




90



74




27




59




68




45




35




75




79




87



88



98



99

G2 - PIXEL

TECHNICAL DATA

- Composition:**
100% polyolefin.
- Light fastness:**
5 - 6, UNE-EN ISO 105-B02. Method 2.
- Abrasion:**
40.000 Martindale EN ISO 12947-2.
- Resistance to pilling:**
4 - 5, UNE-EN 12945-2.
- Dye fastness to rubbing:**
Wet 4 - 5.
Dry 4 - 5, UNE-EN ISO 105-X12.
- Tear Resistance:**
Warp 120N.
Weft 130N UNE-EN ISO 13937-3.
- Flammability:**
EN 1021-1 (cigarette)
BS 5852-0 (cigarette)
CAL TB 117 Section 1.
NFPA 260 Clase 1.

Width: 140cm
Weight: 255gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

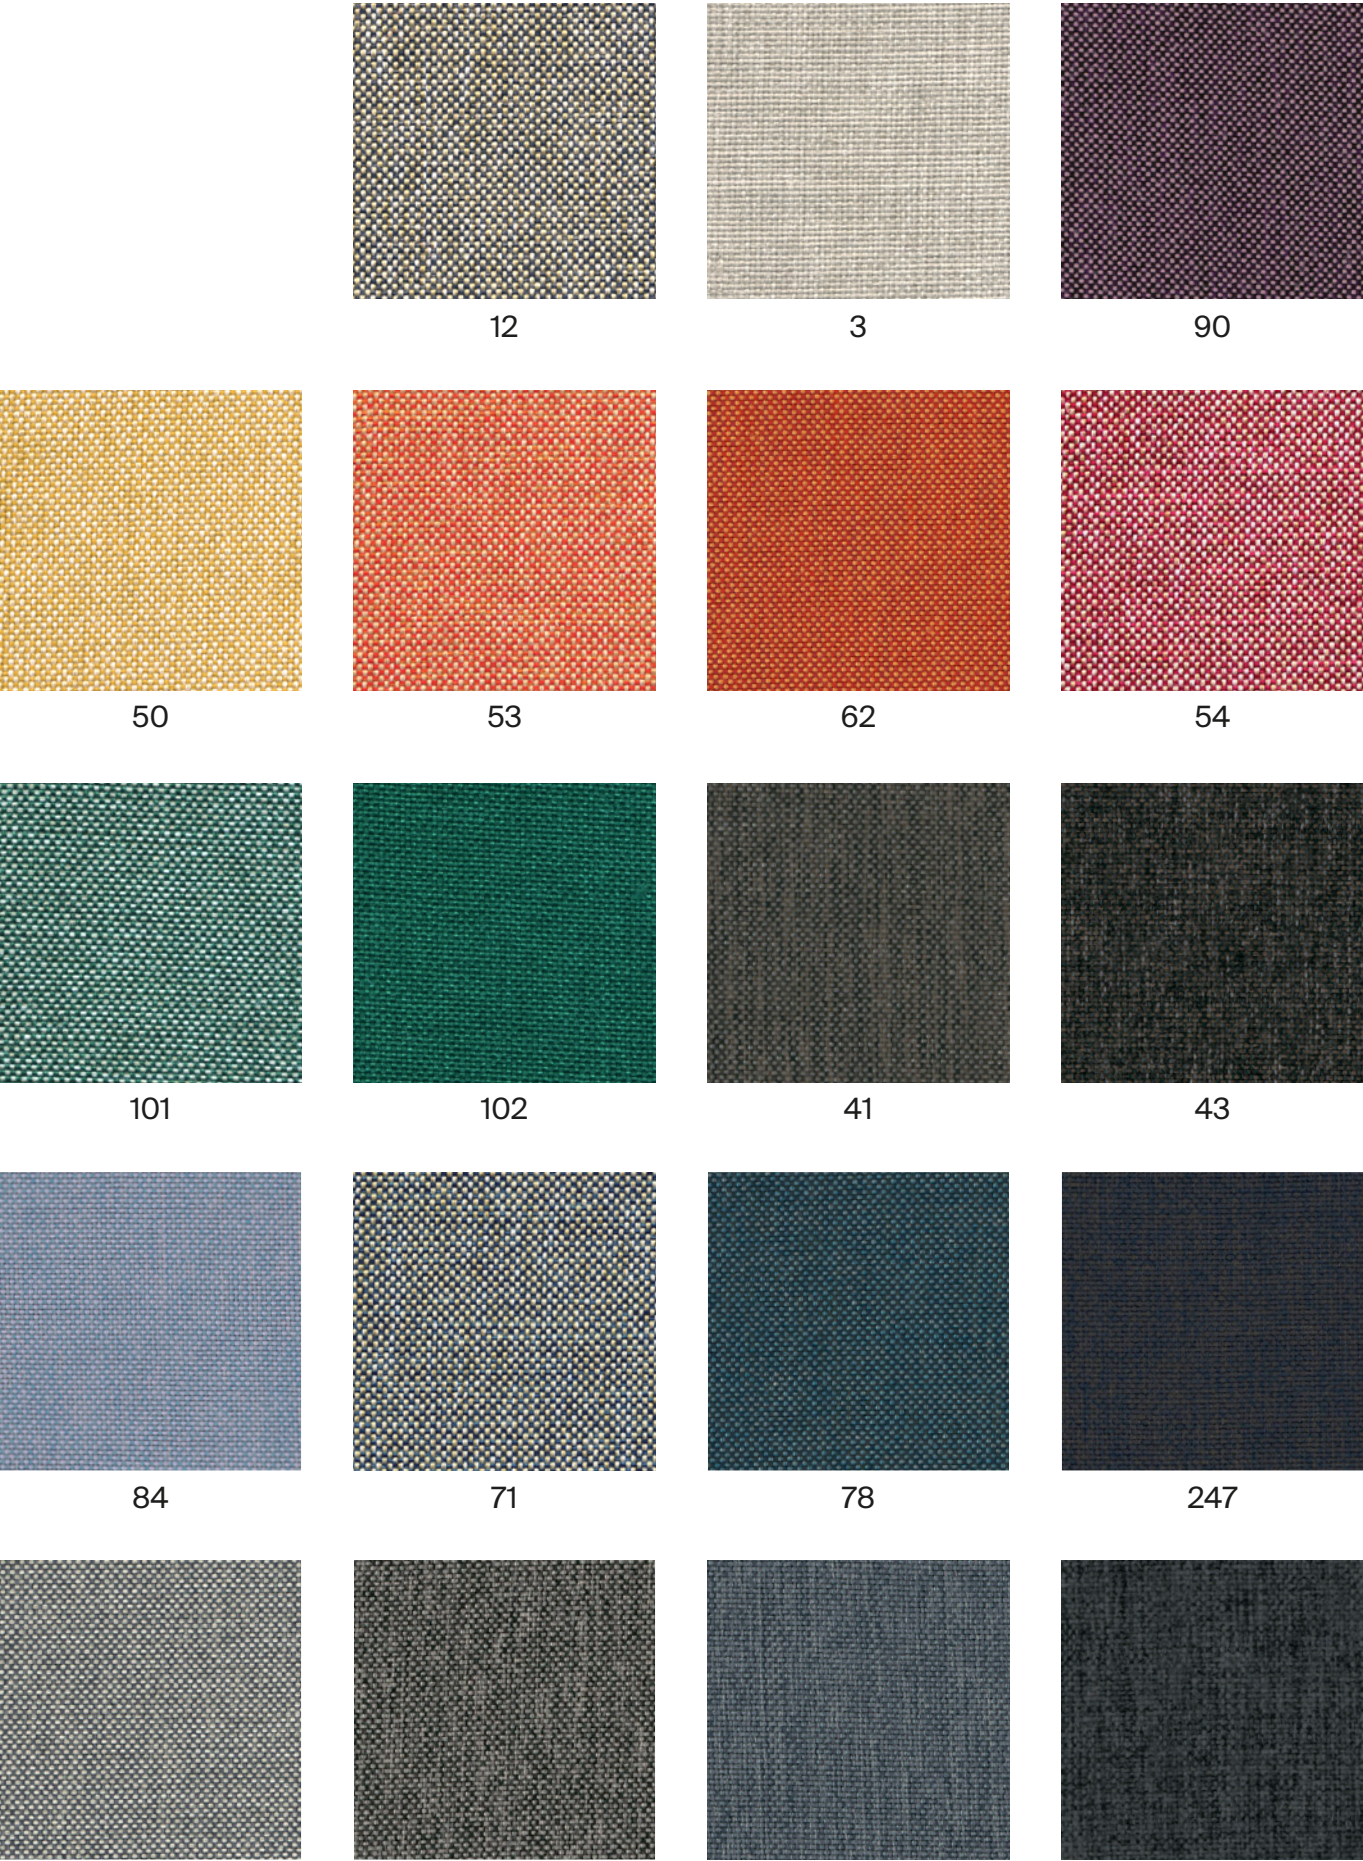

G2 - CORA

TECHNICAL DATA

Composition:
100% polyester.

Light fastness:
5 EN ISO 105-B02, Method 2.

Abrasion:
83.000 Martindale EN ISO 12947-1, 2.

Resistance to pilling:
4, EN ISO 12945-2.

Rubbing fastness in humid state:
5, ISO 105-X12.

Rubbing solvents:
5, ISO 105-X12.

Seam strength:
Warp 2,5mm.
Weft 3,7mm, ISO 13936-2.

Tear strength:
Warp exceed 154,2N.
Weft exceed 112,3N, EN ISO 13937-3.

Width: 140cm
Weight: 330gr/m²



***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



G2 - HILTON

TECHNICAL DATA

- Composition:**
100% polyester.
- Light fastness:**
4, ISO 105 B02.
- Abrasion:**
>25.000 Martindale ISO 12947-2.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Tear strength:**
Warp 63N.
Weft 63N, ISO13937-3.
- Dye fastness to rubbing:**
Wet 4 - 5. Dry 4 - 5, ISO 105X12.

Width: 140cm
Weight: 380gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

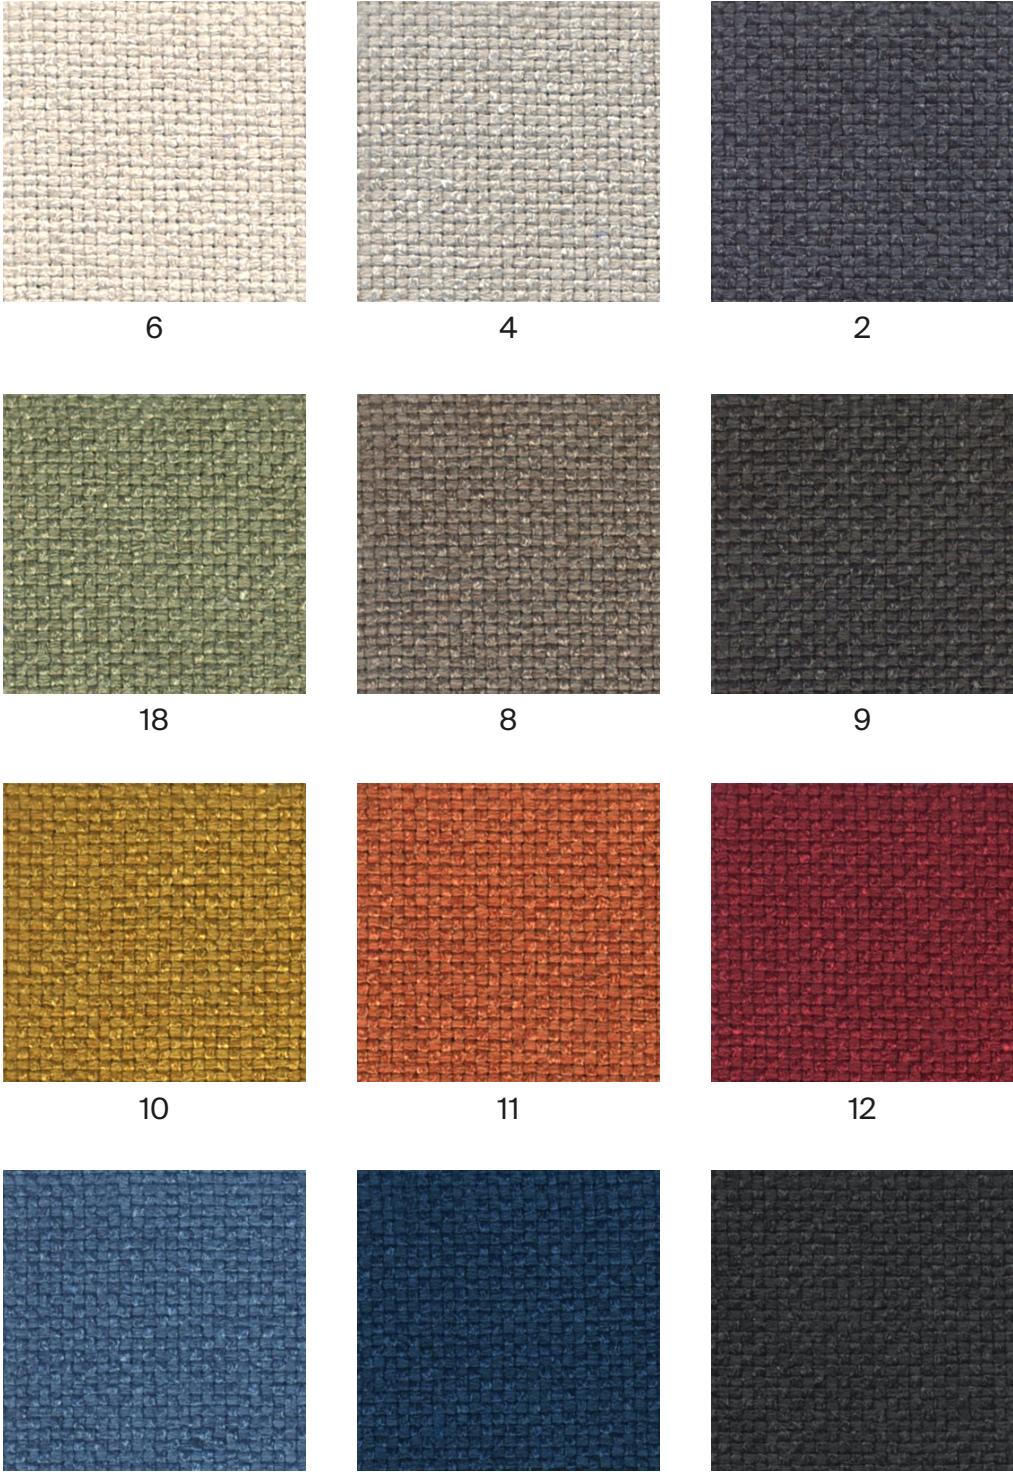

G2 - ADDO

TECHNICAL DATA

- Composition:
80% polyester, 20% cotton.
- Light fastness:
5, ISO 105 B02, Method 2.
- Abrasion:
40.000 Martindale ISO 12947-1, 2.
- Resistance to pilling:
4, ISO 12945-2.
- Rubbing fastness in humid state:
3, ISO 105-X12.
- Rubbing solvents:
4 - 5, ISO 105-X12.
- Seam strength:
Warp 3mm.
Weft 2mm, ISO 13936-2.
- Tear strength:
Warp exceed 175,1N.
Weft exceed 120,7N, EN ISO 13937-3.
- Flammability:
EN 1021 - 1 (cigarette).

Width: 140cm
Weight: 365gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

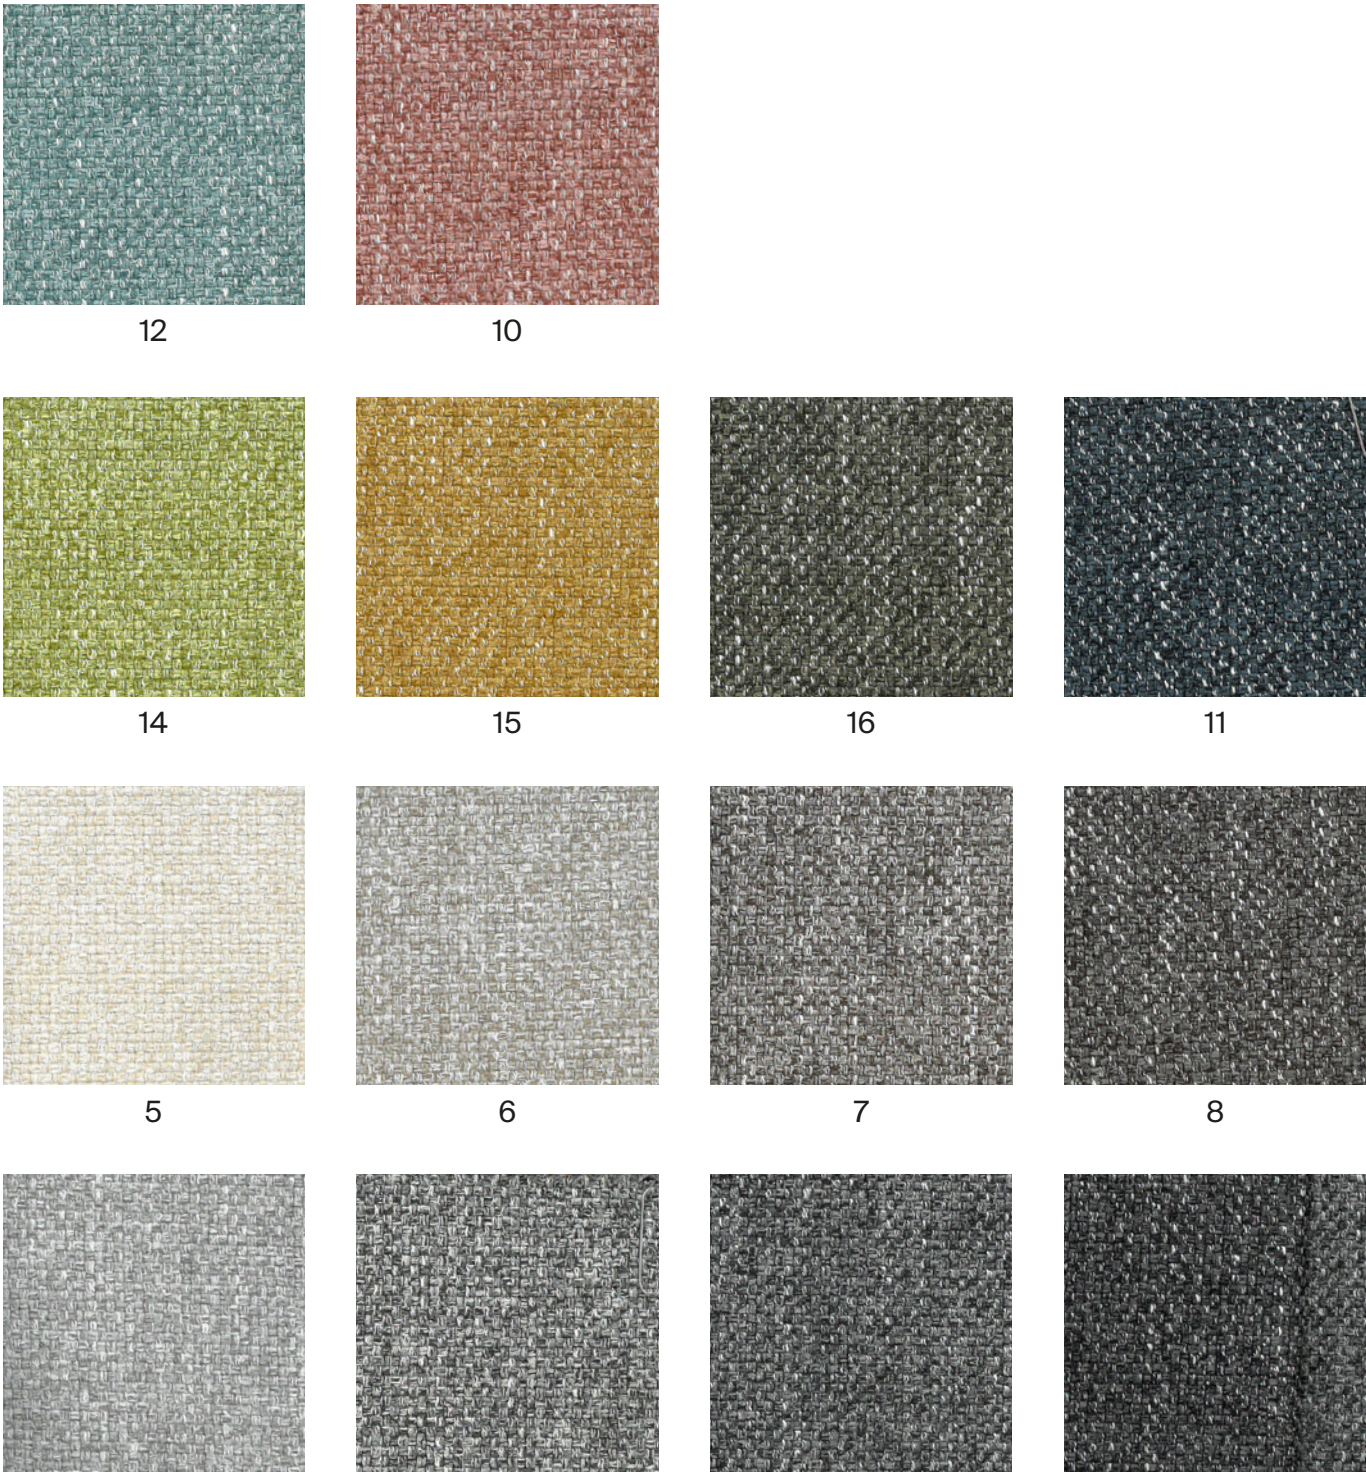

G3 - APTA ^{NEW}

TECHNICAL DATA

- Composition:**
71% polyester, 18% modacrylic, 8% recycled cotton, 3% polyamide.
- Light fastness:**
4 - 5, ISO 105 B02.
- Abrasion:**
60.000 Martindale ISO 12947.
- Resistance to pilling:**
5, ISO 12945-2.
- Fastness to rubbing:**
4 - 5, ISO 105-X12.
- Tensile strength:**
>350N, ISO 13934-1.
- Tear strength:**
>20N, BS 4303.
>3N, DIN 53859-5.
- Flammability:**
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 5852 (cigarette).
- Environment:**
Oeko-Tex® standard 100.
- Characteristics:**
Anti-stain protection.
Antibacterial and virus protection protection.


Width: ±140cm
Weight: ±518gr/m



***Batch to batch variations may occur within commercial tolerances.



Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

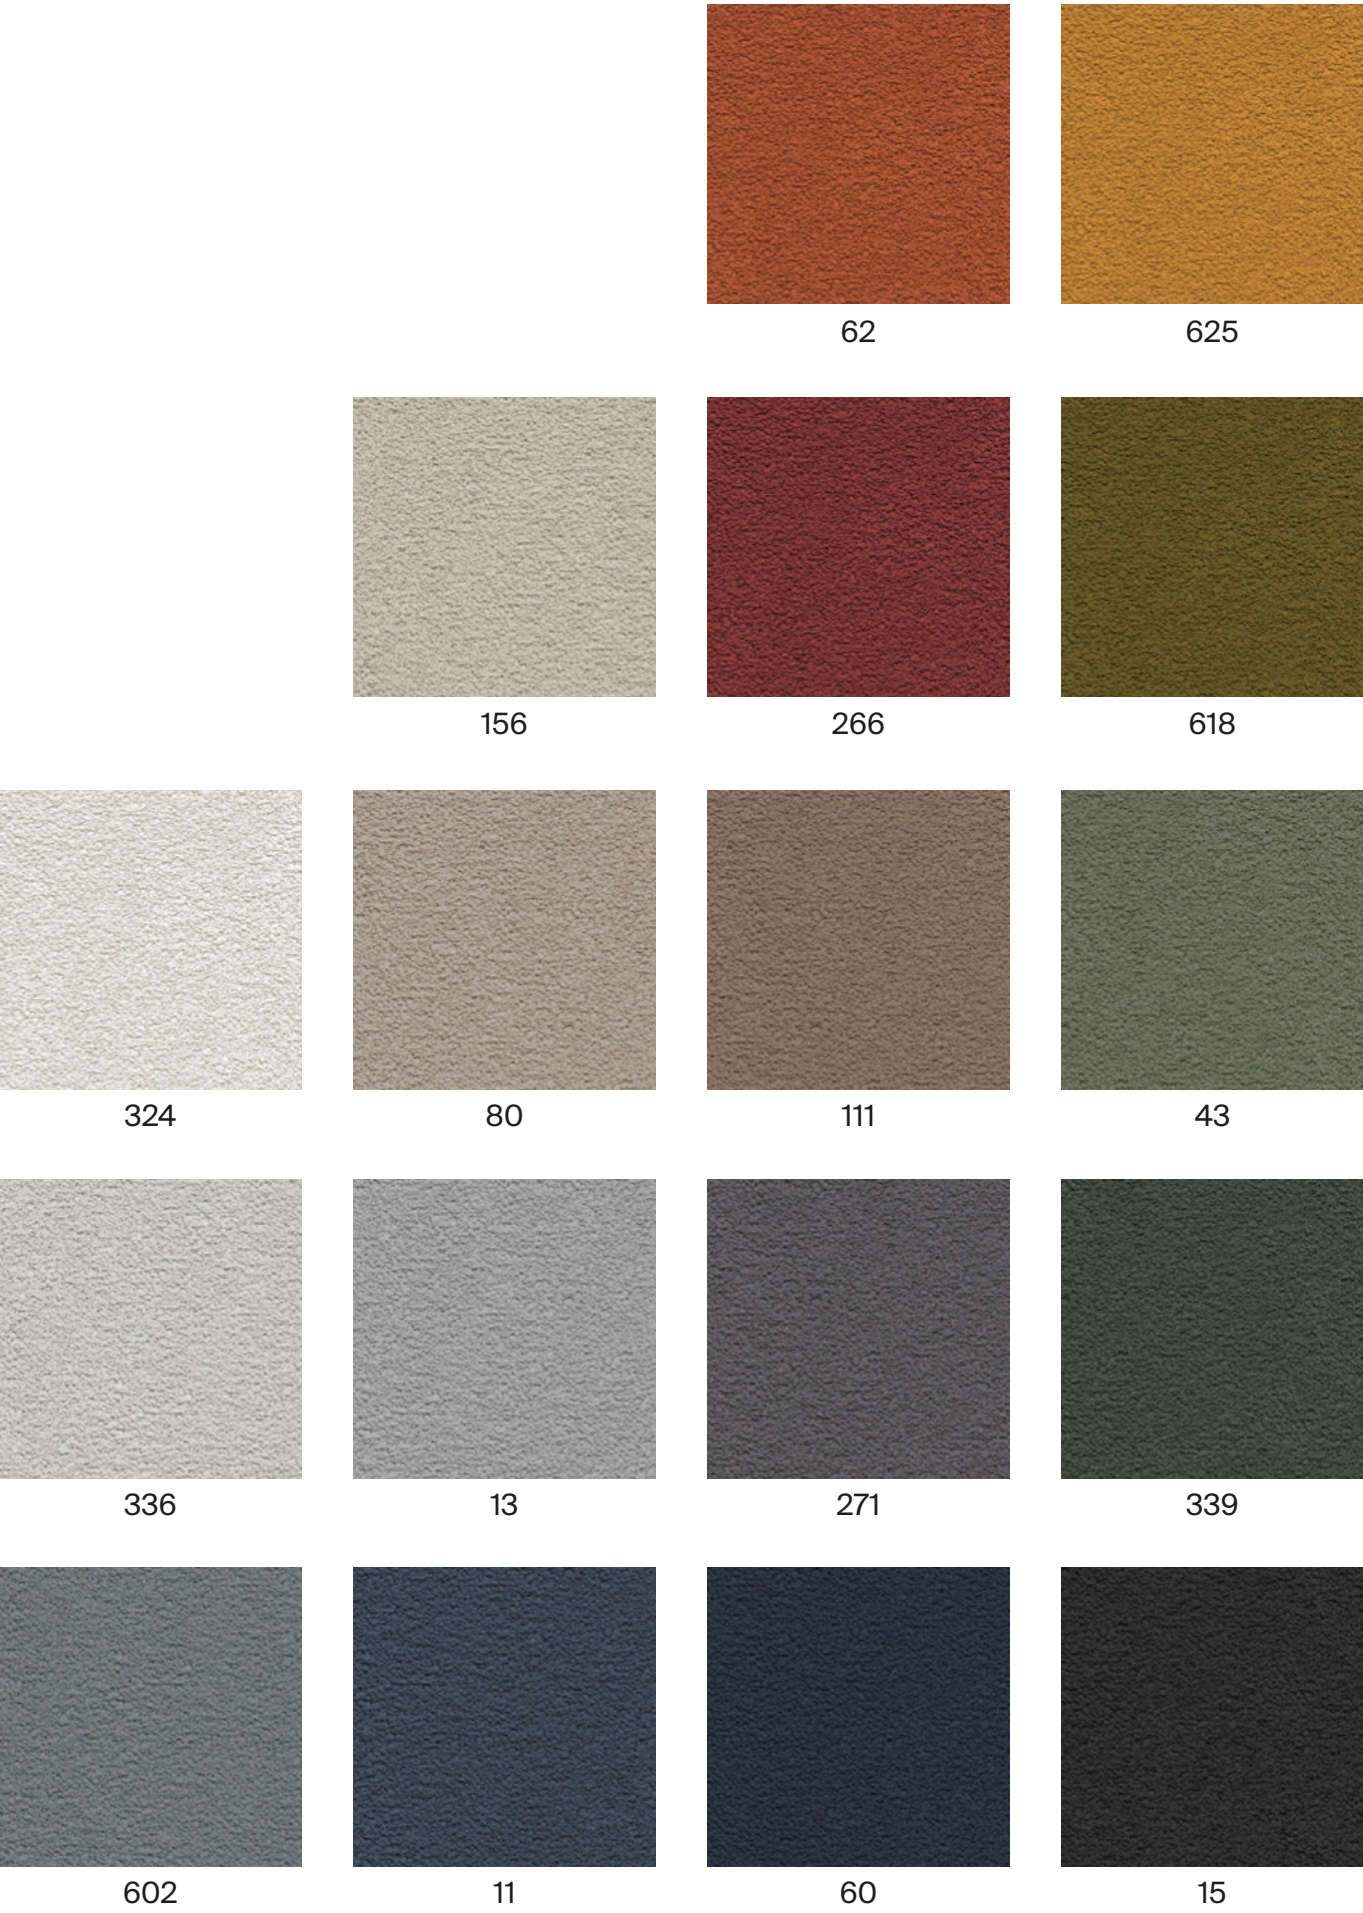

G3 - CURA ^{NEW}

TECHNICAL DATA

- Composition:**
98% recycled polyester, 2% polyester.
- Light fastness:**
5 - 8, ISO 105 B02.
- Abrasion:**
100.000 Martindale ISO 12947-2.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Fastness to rubbing:**
Wet 4 - 5.
Dry 4 - 5, ISO 105-X12.
- Flammability:**
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
CA TB 117-2013.
ASTM E 84 Class 1.
- Environment:**
Oeko-Tex® standard 100.
Complies with EU Ecolabel.

Width: ±140cm
Weight: ±420gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




60000




61232




68262




62083




64013




60112




68181




61257




64196




60110




68261




64195




61169



65105



66170



66166



60999

G3 - IBER^{NEW}

TECHNICAL DATA

- Composition:**
69% PES, 30% cotton, 1% polyamide.
- Light fastness:**
4 - 5, ISO 105 B02.
- Abrasion:**
70.000 Martindale ISO 12947 - BS 2543.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Fastness to rubbing:**
Wet 4 - 5.
Dry 4.
- Seam spliagge:**
Warp <3mm.
Weft <4mm.
- Flammability:**
BS 5852 Part 1.
- Environment:**
Oeko-Tex® standard 100.

Width: ±140cm
Weight: ±570gr/m²



***Batch to batch variations may occur within commercial tolerances.



70%
recycled material
Recycled
Cotton




Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



01



09




10



14




18



19



04




55




38




07



37



91



90

G3 - CALMA

TECHNICAL DATA

- Composition:

Topcoat: 70% Vinyl, 30% P.U.

Backing: 100% Microfiber Polyester.
- Light fastness:

>4.
- Abrasion:

>100.000 Martindale.
- Breaking strength:

Warp >180N.

Weft >330N, ISO 1421.
- Tear strength:

Warp >25N/cm.

Weft >28N/cm, ISO 4674-1.
- Flex Bally:

>100.000 cycles.

Width: 140cm.
Weight: 853gr/m².



***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



G3 - RIVET

By Camira

TECHNICAL DATA

- Composition:
100% REPREVE® recycled polyester.
- Light fastness:
6, EN ISO 105-B02, Method 3.
- Abrasion:
≥80.000 Martindale EN ISO 12947-2.
- Fastness to rubbing:
Wet 4.
Dry 4, ISO 105 X12.
- Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
UNI 9175 Class 1 IM.
- Environment:
Complies with EU Ecolabel.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 280gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




26




10




14




09




36




11




21




27




24




34



48



50



37

G3 - ERA

By Camira

TECHNICAL DATA

- Composition:
100% polyester.
- Light fastness:
5, EN ISO 105 B02.
- Abrasion:
≥100.000 Martindale EN ISO 12947.
- Fastness to rubbing:
Wet 4.
Dry 4, ISO 105 X12.
- Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
EN 13501-1 Adhered Class B, s1, d0.
EN 13501-1 Un-adhered Class C, s1, d0.
- Environment:
OEKO-TEX® Standard 100.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 320gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




19




3




27




26




29



16




34



1




2




45




11




13




21



46



39



40



14

G3 - MEDLEY

By Gabriel

TECHNICAL DATA

- Composition:
100% polyester.
- Light fastness:
5 - 7, EN ISO 105 B02.
- Abrasion:
75.000 Martindale EN ISO 12947-2.
- Resistance to pilling:
4, EN ISO 12945-2.
- Fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, ISO 105 X12.
- Flammability:
BS EN 1021 1&2 Cigarette and Match.
BS EN 1021-1 Cigarette.
BS 5852 Part 1 0,1 Cigarette and Match.
BS 476 Part 7, class 2.
Class Uno UNI 9174 - UNI 8457.
ÖNORM B 3825-B2-3800-Q1 UK.
CA TB 117.
ASTM E 84.
- Environment:
Oeko-Tex® standard 100
100% free of heavy metals.

Width: 140cm
Weight: 510gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



65011




62054




61003




67002




68005




63064




64019




63016




63063



66008




67006



66010



61004



60003



60167



60004



60999

G4 - MAIN LINE FLAX

By Camira

TECHNICAL DATA

- Composition:**
75% virgin wool, 25% flax.
- Light fastness:**
5, ISO 105 B02.
- Abrasion:**
≥50.000 Martindale EN ISO 12947-2:1999.
- Resistance to pilling:**
4 - 5, ISO 12945-2.
- Fastness to rubbing:**
Wet 3.
Dry 4, ISO 105 X12.
- Flammability:**
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
BS 5852 Ignition source 5.
BS 7176 Medium Hazard.
NF D 60-013.
ÖNORM B 3825 & A 3800-1.
UNI 9175 Class 1 IM.
BS 5867-2: Type B Curtains & Drapes.
IMO FTP Code (Part 8).
- Environment:**
Complies with EU Ecolabel.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 437gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

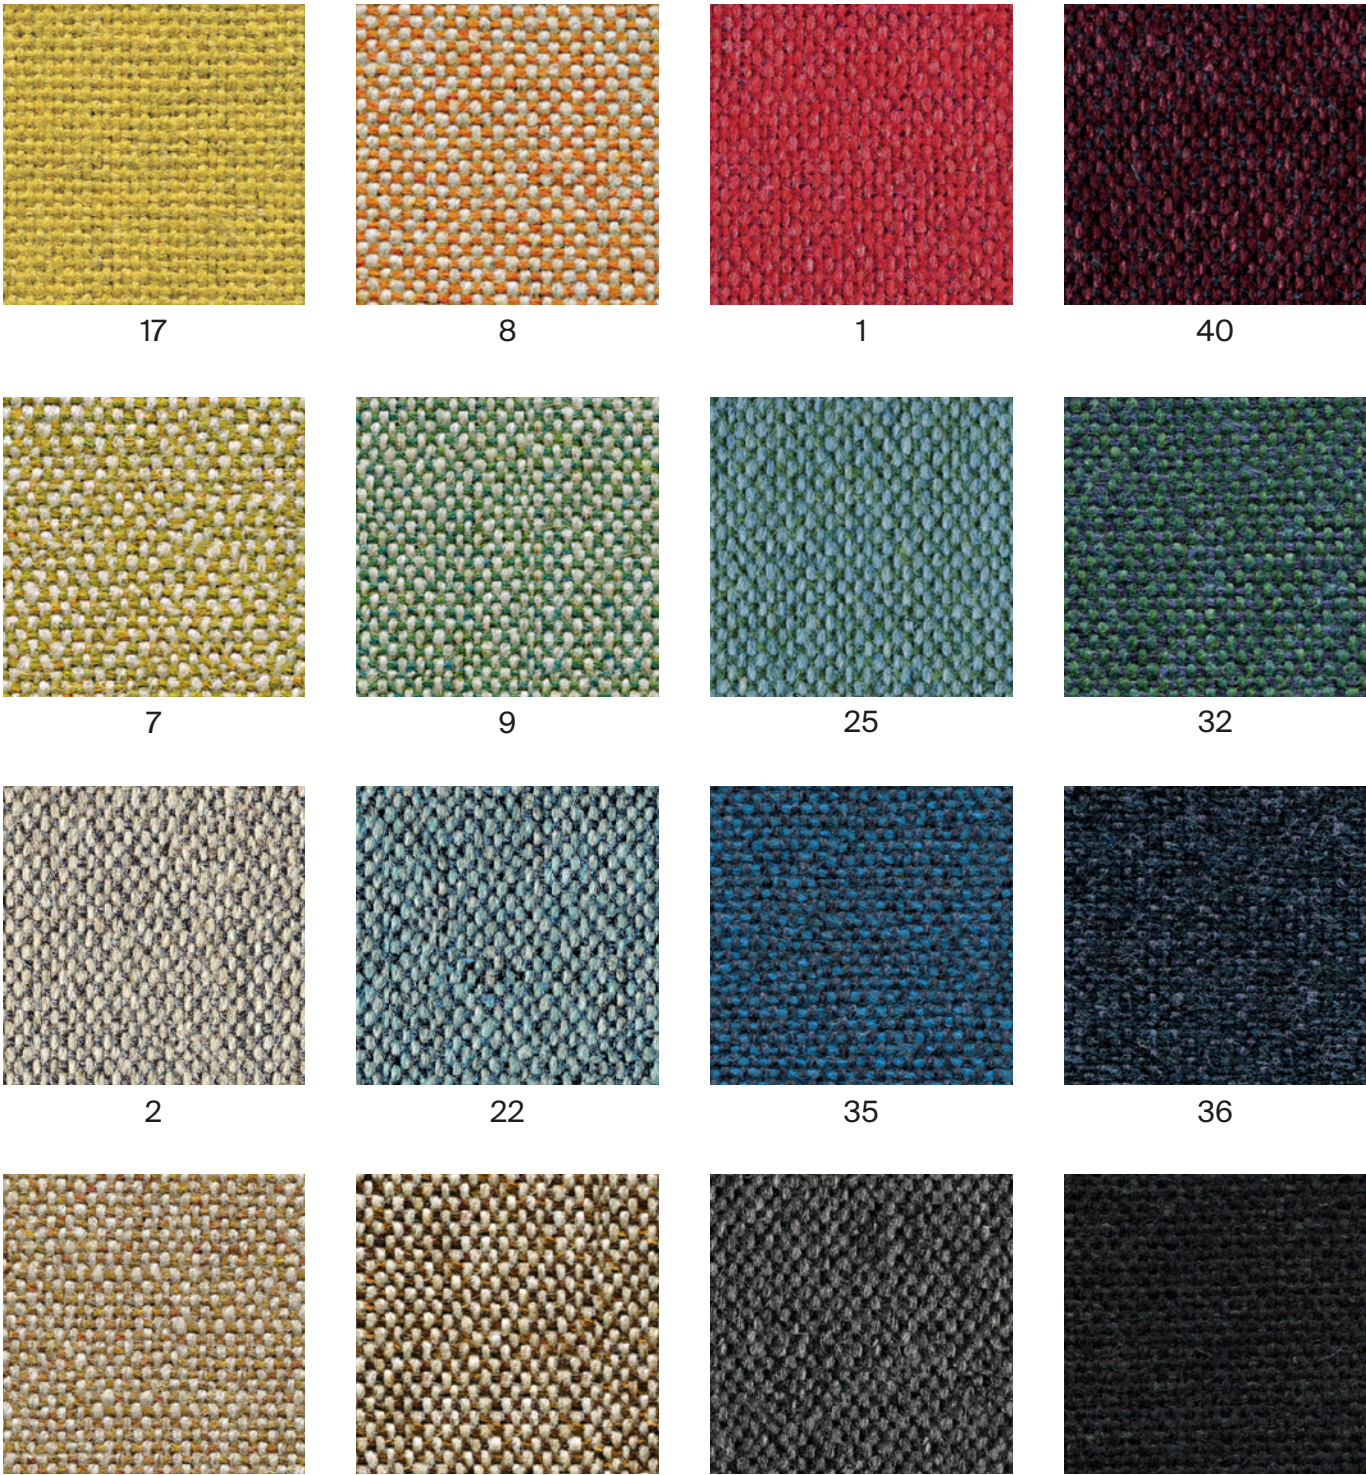

G4 - CONNECT

By Gabriel

TECHNICAL DATA

- Composition:
48% wool, 41% recycled polyester, 9% polyamide, 2% polyester.
- Light fastness:
5 - 7, ISO 105 B02.
- Abrasion:
90,000 Martindale EN ISO 12947-2.
- Resistance to pilling:
4 - 5, ISO 12945-2.
- Fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, ISO 105 X12.
- Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 5852 Crib 5.
CA TB 117-2013.
Class Uno UNI 9175 Class 1 I EMME.
- Environment:
Oeko-Tex® standard 100.
Complies with EU Ecolabel.

Width: 140cm
Weight: 370gr/m²



***Batch to batch variations may occur within commercial tolerances.



Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



60147 61208 68229

62109 63107 64229 64230

67113 67115 61209 61210

66205 65127 60152 60999

G4 - VALENCIA

By Spradling

TECHNICAL DATA

Composition:
Topcoat: 100% Vinyl.
Backing: 100% Polyester Hi-Loft²™.

Light fastness:
1000 hours, XENOTEST DIN 54004/NTC 1479.

Abrasion:
300.000 cycles de Martindale EN ISO 12947 Part 2.

Cold crack resistance:
-23°C.


Characteristics:
Antimicrobial protection.
Anibacterial protection.
Antimycotic protection.

Flammability:
EU: EN 1021 Part 1 y 2.
ES: UNE 23.727-90 1R/M.2.
FR: NF P 92-503/M2.
DE: DIN 4102 B2.
IT: UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME).
AT: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten.
AT: ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend.
IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2.
US: FMVSS 302.
US: FAR 25/853.
(MED) Marine Equipment Directive.
ECE R118.02 (replaces Directive 95/28/CE) Annexes 6, 7 & 8.
EN 71-2:2006+A1:2007 - Toy safety - Parte 2: Inflamability.

Width: 140cm
Weight: 685gr/m²



***Batch to batch variations may occur within commercial tolerances.

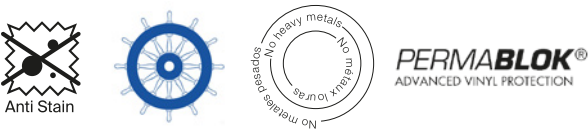

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



G4 - STEP NEW

By Gabriel

TECHNICAL DATA

- Composition:
100% trevira CS.
- Light fastness:
5 - 7, ISO 105 B02.
- Abrasion:
100.000 Martindale EN ISO 12947.
- Resistance to pilling:
4 - 5, ISO 12945-2.
- Fastness to rubbing:
Wet 4 - 5. - Dry 4 - 5, ISO 105 X12.
- Flammability:
IMO MSC 307(88) Annex 1 part 8.
MED.
Certificate IMO.
DIN 4102 B1.
NFP 92-503/504/505 M1.
BS EN 1021 1&2 Cigarette and Match.
BS EN 1021-1 Cigarette.
BS 5852 Part 1 0,1 Cigarette and Match.
BS 5852 Crib 5.
ÖNORM B 3825-B1-3800-Q1 UK.
FAR/JAR 25.853 (a) (i) (ii).
BS 7176 Medium hazard.
AM 18 - NF D 60-013-(only for fabric).
CA TB 117-2013.
Class Uno UNI 9175 Class 1 I EMME.
DIN EN 13501-1 B-s1,d0.
- Environment:
Oeko-Tex - EU Ecolabel - 100% free of heavy metals.


Width: 140cm
Weight: 470gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




2442 - 64159




2440 - 62057



2442 - 68301




2442 - 68165




2440 - 68165




2440 - 61149




2442 - 60004




2442 - 67004




2440 - 60004




2440 - 60011




2442 - 60011




2442 - 66152




2440 - 66764




2440 - 60090




2442 - 61103



2442 - 60021



2440 - 60999



2440 - 68121

G5 - DOLCE

By Spradling

TECHNICAL DATA

- Composition:**
 - Topcoat: 100% polyurethane.
 - Backing: 100% rayon.
- Light fastness:**
 - 40 hours, XENOTEST DIN 54004/NTC 1479.
- Abrasion:**
 - ≥300.000 Martindale EN ISO 12947 Part 2.
- Cold crack resistance:**
 - 23°C.
- Characteristics:**
 - Antibacterial protection.
- Flammability:**
 - EU: EN 1021 Part 1 y 2
 - US: FMVSS 302
 - UK: BS 5852 Part 2 CRIB 5
 - IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2.

Width: 140cm
Weight: 685gr/m²



***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



6703




6706




6708




6719




6714




6709



6711



6712




6717




6729




6726



6727



6736




6735



6734



6724



6728

G5 - SYNERGY

By Camira

TECHNICAL DATA

- Composition:

95% virgin wool, 5% polyamide.
- Light fastness:

5, ISO 105-B02.
- Abrasion:

≥100.000 Martindale EN ISO 12947.
- Fastness to rubbing:

Wet 4.

Dry 4, ISO 105 X12.
- Flammability:

EN 1021 - 1 (cigarette).

EN 1021 - 2 (match).

BS 7176 Low Hazard.

NF D 60-013.

ÖNORM B 3825 & A 3800-1 (sobre 58kg/m³ Foam CMHR).

UNI 9175 Classe 1 IM.

EN 13501-1 Adhered Class D, s1, d0.

EN 13501-1 Un-adhered Class E, s2, d0.

IMO FTP Code (Part 8).
- Environment:

Complies with EU Ecolabel.

Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 400gr/m²




***Batch to batch variations may occur within commercial tolerances.




Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




74



45




43



73



84



32



22




37




34




49



59




62




41




8



16



17



27

G5 - REMIX

By Kvadrat

TECHNICAL DATA

- Designer:**
Giulio Ridolfo.
- Composition:**
90% new wool, 10% nylon.
- Light fastness:**
5 - 7, ISO 105-B02.
- Abrasion:**
100.000 Martindale EN ISO 12947.
- Resistance to pilling:**
4, EN ISO 12945.
- Flammability:**
AS/NZS 1530.3.
BS 5852 part 1.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
- Environment:**
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 415gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

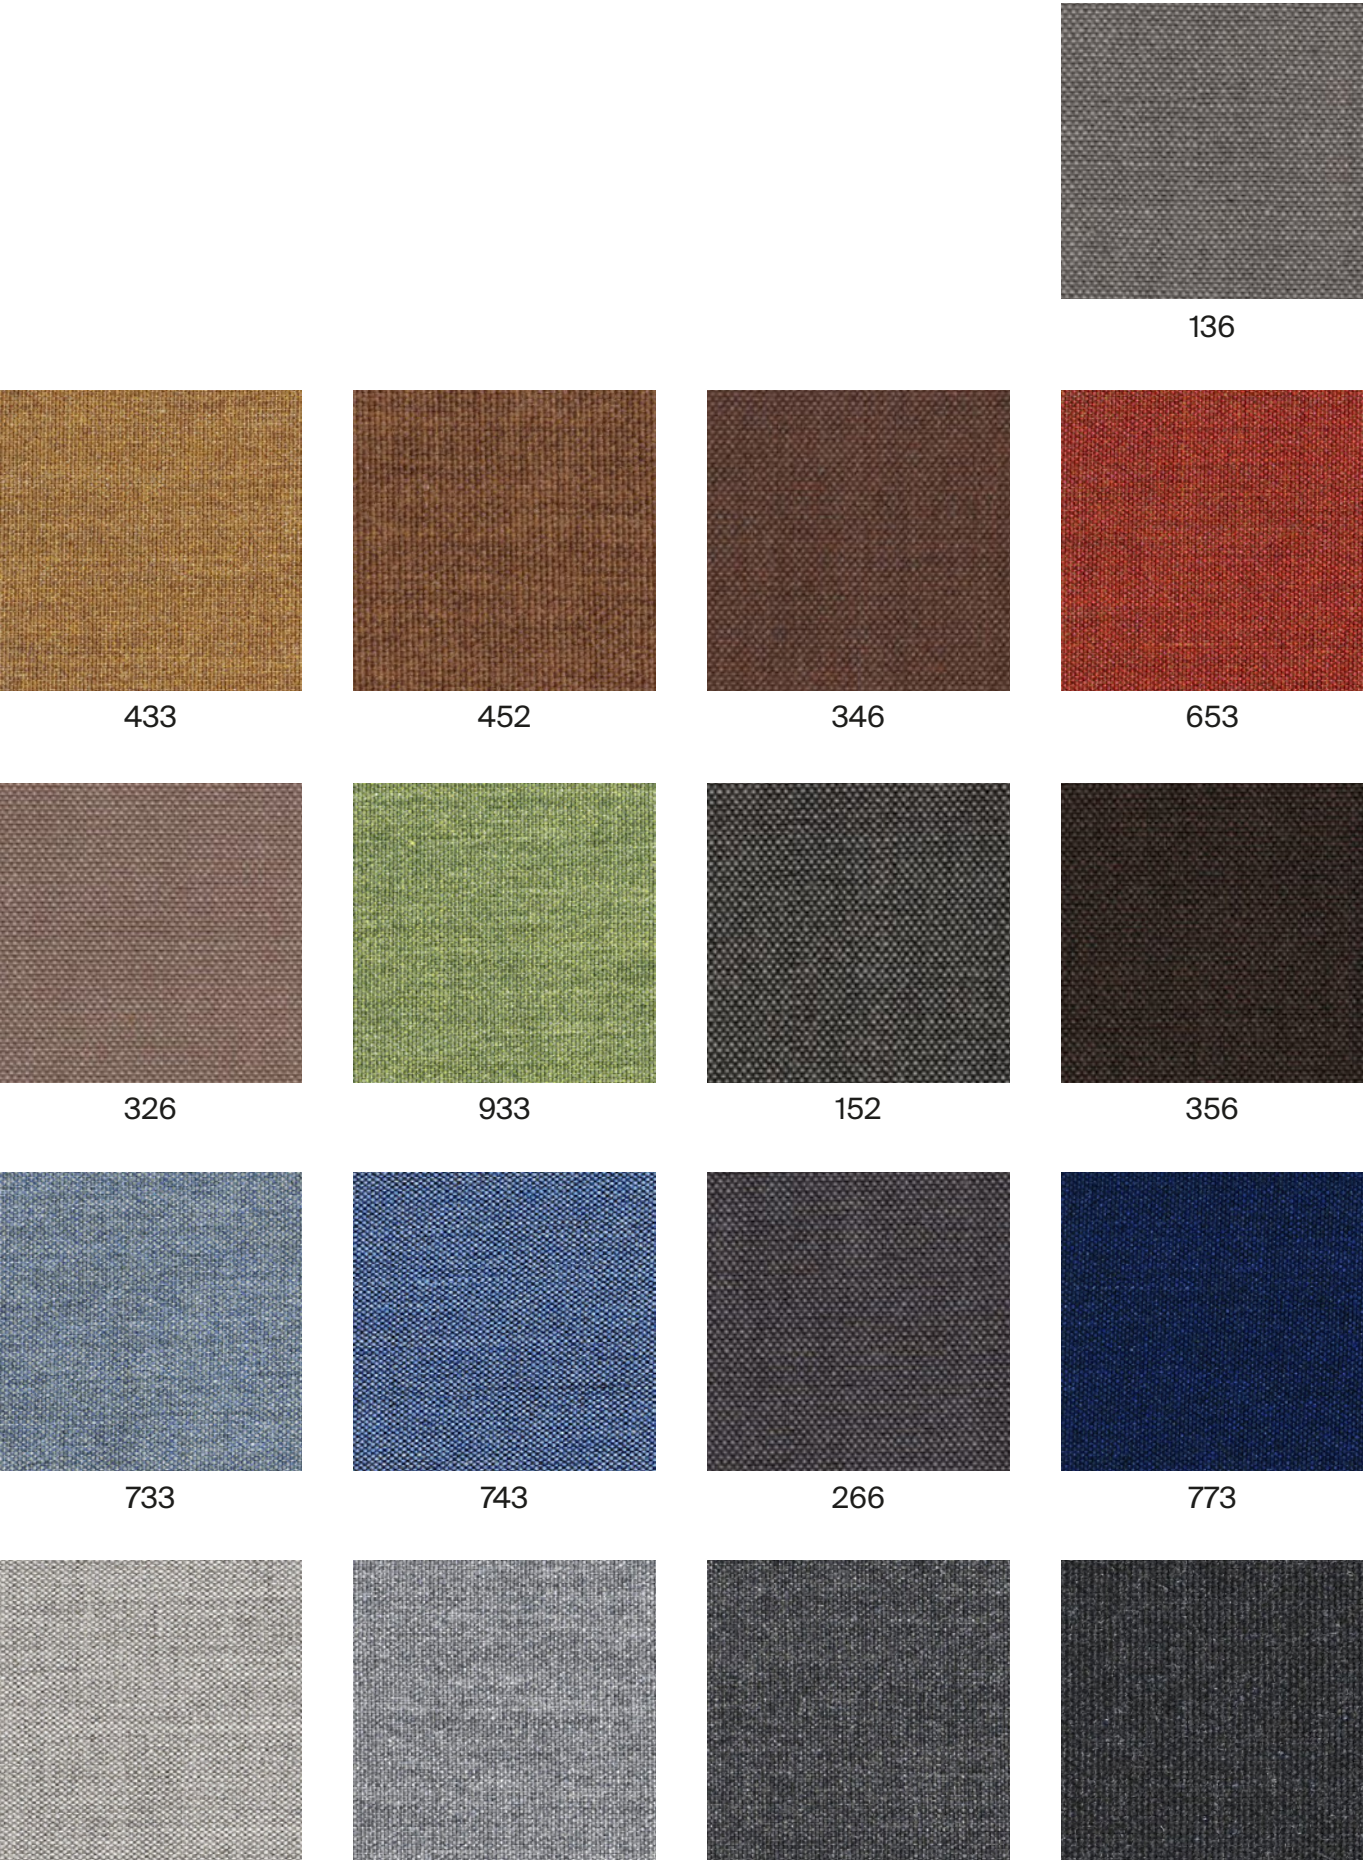

			136
433	452	346	653
326	933	152	356
733	743	266	773
123	143	163	183

G5 - CANVAS

By Kvadrat

TECHNICAL DATA

- Designer:**
Giulio Ridolfo.
- Composition:**
90% new wool, 10% nylon.
- Light fastness:**
5 - 7, ISO 105-B02.
- Abrasion:**
100.000 Martindale EN ISO 12947.
- Resistance to pilling:**
4 - 5, EN ISO 12945.
- Flammability:**
AS/NZS 1530.3.
BS 5852 Crib 5 when flameprotected.
BS 5852, ignition source 3.
BS 5852 part 1.
DIN 4102 B2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
- Environment:**
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 480gr/m².




***Batch to batch variations may occur within commercial tolerances.



Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.



124




244




614



654




954




964




454




424




264



364



684



794



174

G6 - STEELCUT TRIO

By Kvadrat

TECHNICAL DATA

- Designer:**
Frans Dijkmeijer and Giulio Ridolfo.
- Composition:**
90% new wool, 10% nylon.
- Light fastness:**
5 - 7 ISO 105-B02.
- Abrasion:**
100.000 Martindale EN ISO 12947.
- Resistance to pilling:**
4, EN ISO 12945.
- Flammability:**
AS/NZS 1530.3
AS/NZS 3837 class 2.
BS 5852 part 1.
DIN 4102 B2.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
- Environment:**
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 770gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

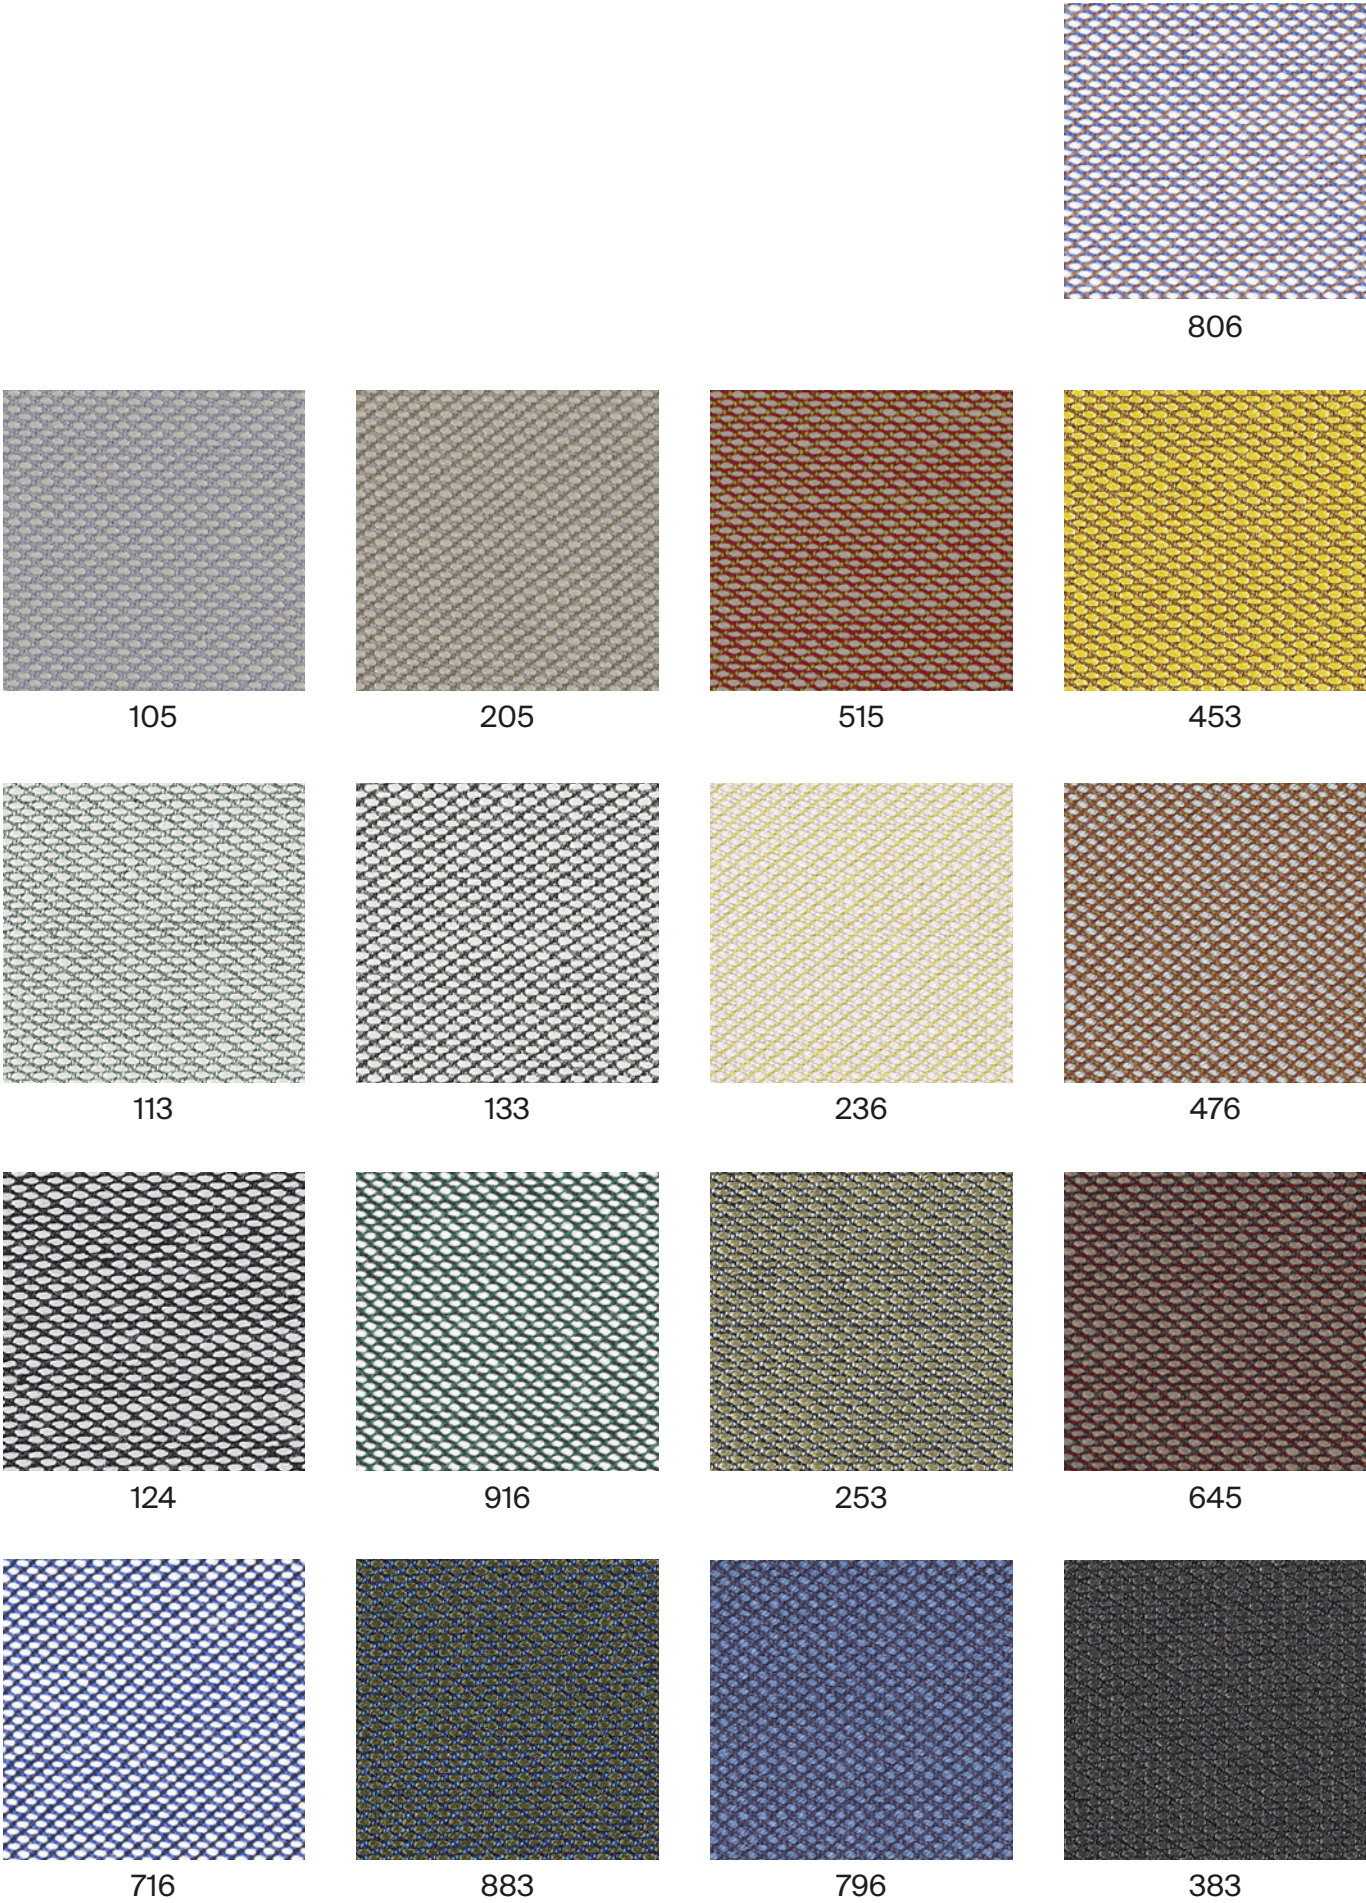

G6 - STEELCUT TRIO

G6 - FIORD

By Kvadrat

TECHNICAL DATA

- Designer:

Louise Sigvardt & Tone Barnung.
- Composition:

92% new wool, 8% nylon.
- Light fastness:

5 - 7, ISO 105-B02.
- Abrasion:

60.000 Martindale EN ISO 12947.
- Resistance to pilling:

4 - 5, EN ISO 12945.
- Flammability:

AS/NZS 3837 class 2.
ASTM E84 Class A Adhered.
ASTM E84 Class A Unadhered.
BS 5852 part 1.
EN 1021-1/2.
IMO FTP Code 2010:Part 8.
NF D 60 013.
NFPA 260
ÖNORM B1/Q1
UNI 9175 1IM.
US Cal. Bull. 117-2013.
- Environment:

Complies with EU ecolabel “The Flower”
100% free of heavy metals.

Width: 140cm
Weight: 500gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

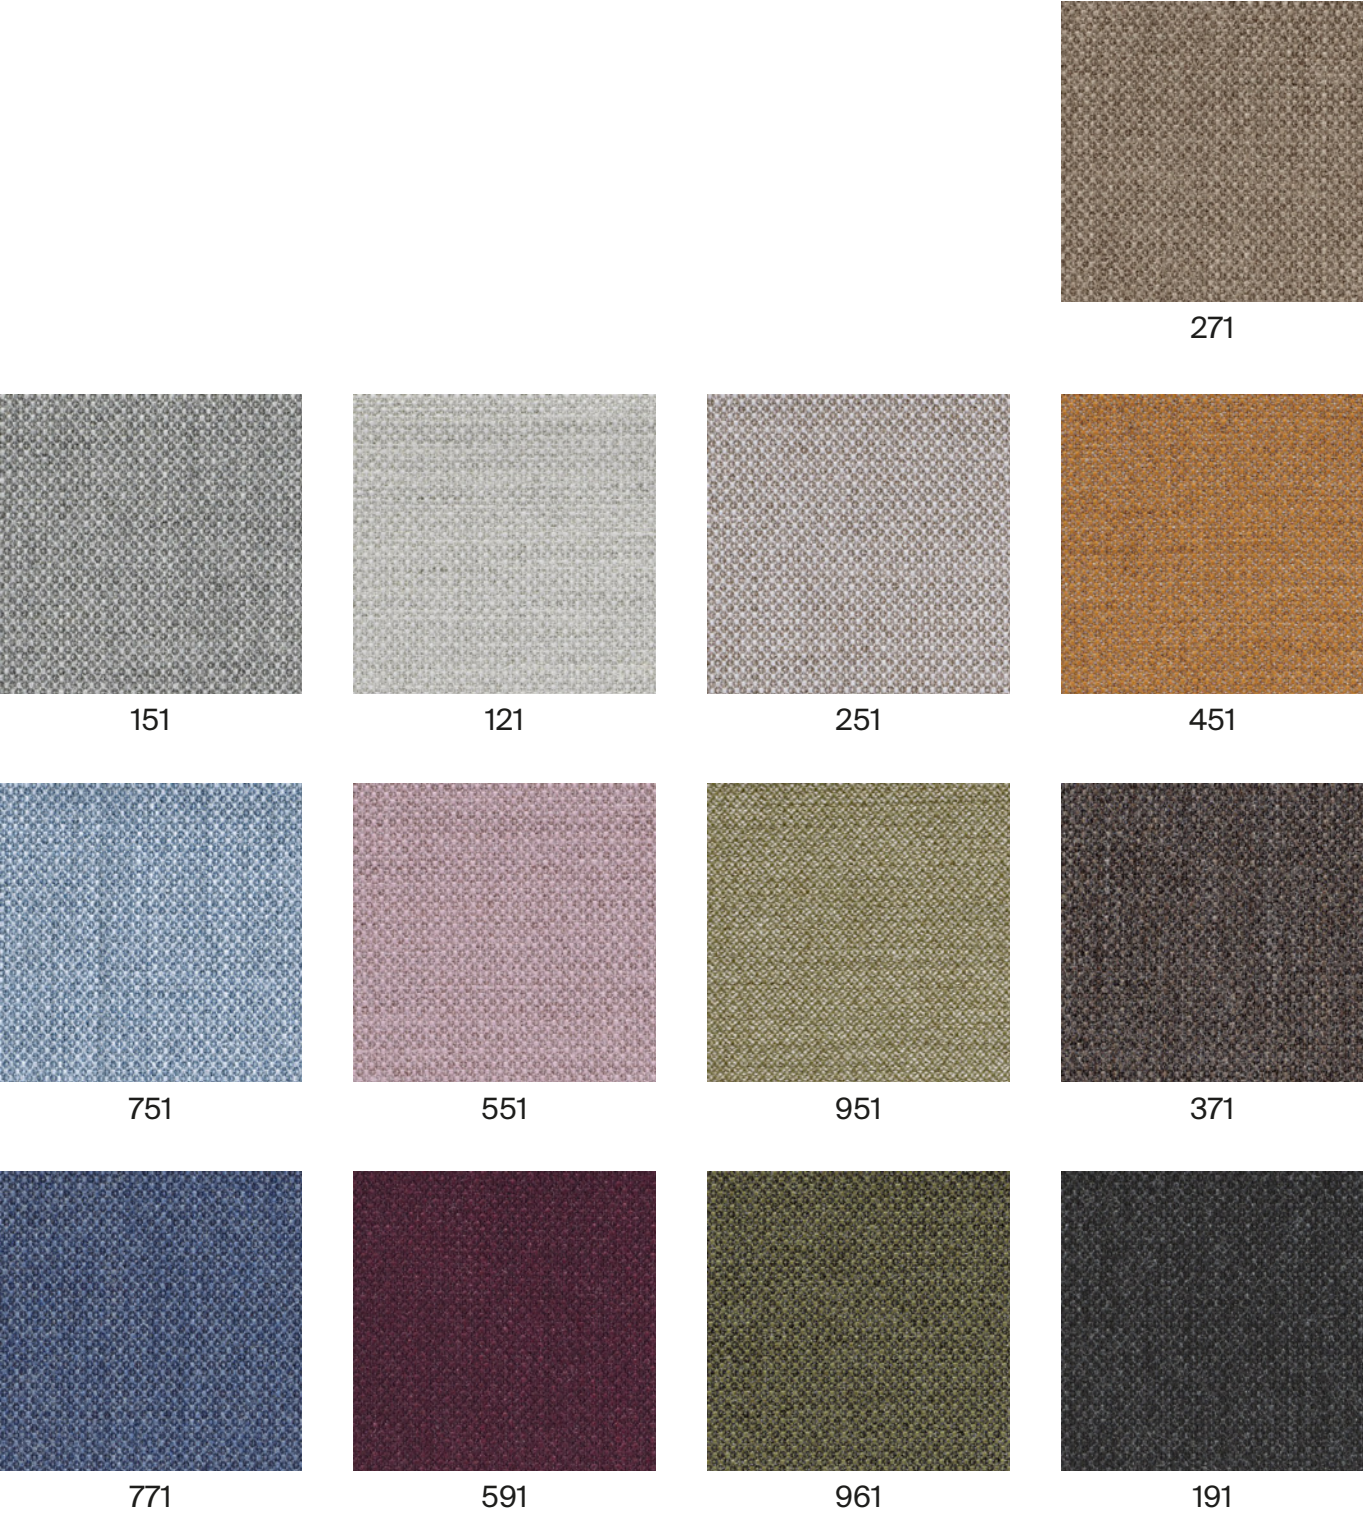

G7 - HALLINGDAL

By Kvadrat

TECHNICAL DATA

- Designer:**
Nanna Ditzel.
- Composition:**
70% new wool, 30% viscose.
- Light fastness:**
5 - 7 ISO 105-B02.
- Abrasion:**
100.000 Martindale EN ISO 12947.
- Resistance to pilling:**
3, EN ISO 12945.
- Flammability:**
AS/NZS 1530.3.
AS/NZS 3837.
BS 5852 Crib 5.
BS5852 part 1.
DIN 4102 B2.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117 – 2013.
- Environment:**
Complies with EU ecolabel “The Flower”.

Width: 140cm
Weight: 795gr/m²




***Batch to batch variations may occur within commercial tolerances.



Note:


- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.




687




200



407




420




227




100




123




130




368



110




116




126




180



733



773



968



376

G10 - LEATHER


TECHNICAL DATA

- Composition:**
 - Cow leather.
- Light fastness:**
 - ≥4/5, UNI EN ISO 105B02.
- Fastness to rubbing:**
 - Wet ≥4 (150 cycles).
 - Dry ≥4 (500 cycles).
 - Perspiration ≥4 (80 cycles), UNI EN ISO 11640 - 11641 (pH8).
- Tear strength:**
 - >20N, EN ISO 3377-1.
- Determination of PH:**
 - >3,5, EN ISO 4045.
- Adhesion of the finish:**
 - ≥2, UNI EN ISO 11644.
- Determination of dry ex resistance:**
 - Without damage, UNI EN ISO 5402.
- Flammability:**
 - Ignition source 0 (cigarette).
 - Ignition source 1 (match).
 - BS 5852-1979.
 - BS EN 1021-1-2.
- Thickness:**
 - 0,9 - 1,1mm
- Average surface:**
 - 4,8 - 5,0m²
- Maintenance:**
 - Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

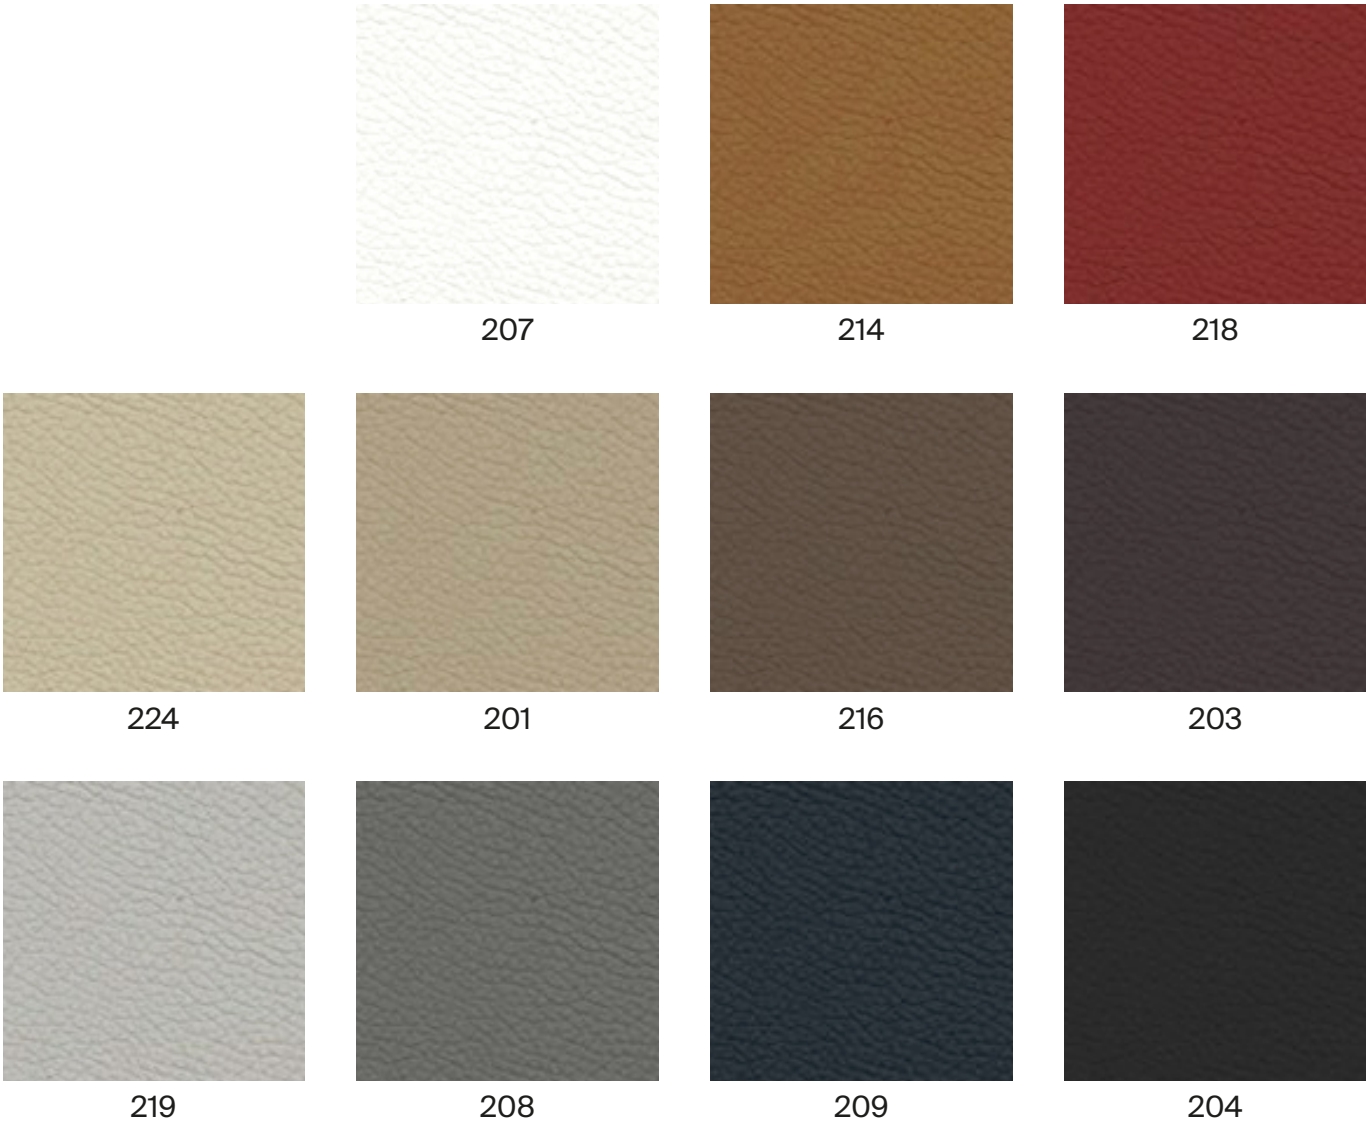

G11 - LEATHER

TECHNICAL DATA

- Composition:**
Cow leather.
- Light fastness:**
≥5, UNI EN ISO 105B02.
- Fastness to rubbing:**
Wet ≥4 (80 cycles).
Dry ≥4 (500 cycles).
Perspiration ≥4 (50 cycles), UNI EN ISO 11640 - 11641.
- Tear strength:**
≥20N, EN ISO 3377-1.
- Determination of PH:**
≥3,5 ≤0,7 EN ISO 4045.
- Adhesion of the finish:**
≥2,5N / 10mm, UNI EN ISO 11644.
- Determination of dry flex resistance:**
>50.000 cycles, UNI EN ISO 5402-1.
- Flammability:**
Ignition source 0 (cigarette)
Ignition source 1 (match), BS 5852-1:79.
- Thickness:**
0,9 - 1,1mm
- Average surface:**
4,8 - 5,0m²
- Maintenance:**
Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.





DÉCLARATION ENVIRONNEMENTALE

INCLASS investit constamment dans de nouvelles solutions dans le but de préserver la santé et l'environnement. Cette gamme de produits a été conçue en tenant compte d'une série de critères écologiques, de santé et de durabilité.

Tous nos produits sont fabriqués localement dans notre usine de production certifiée ISO 9001 et ISO 14001. Pour cela, INCLASS est audité annuellement par Bureau Veritas, leader mondial des services de certification. Le système de gestion environnementale ISO 14001 est le plus reconnu au monde.

Tous les articles sont conçus en minimisant le nombre de composants et en maximisant le nombre de pièces interchangeables. INCLASS privilégie l'utilisation de matériaux recyclables et respectueux de l'environnement, ainsi que des processus de production propres. L'entreprise classe, sépare et recycle tous les déchets générés dans son usine de production selon des procédures certifiées strictes.

Pour éviter les déchets inutiles et minimiser l'utilisation d'énergie et de ressources naturelles, les produits INCLASS sont conçus avec une esthétique intemporelle, loin des tendances à court terme, pour être durables. Les produits sont testés dans des laboratoires indépendants pour s'assurer qu'ils répondent aux normes internationales strictes de qualité, de sécurité et de durabilité.

INCLASS s'engage à fabriquer des produits qui contribuent à créer des environnements plus sains, plus sûrs et plus durables. L'entreprise investit et travaille continuellement pour remplacer les produits chimiques dangereux ou nocifs dans ses produits à mesure que de nouvelles alternatives plus sûres et plus vertes émergent. En conséquence, bon nombre de nos produits sont certifiés GREENGUARD Gold par Underwriters Laboratories. Il est scientifiquement prouvé que les produits certifiés GREENGUARD respectent l'une des normes d'émissions chimiques tierces les plus rigoureuses au monde, contribuant ainsi à réduire la pollution de l'air intérieur et le risque d'exposition à des produits chimiques nocifs. Les produits avec cette certification contribuent également à l'obtention de la qualification bâtiment écologique, avec LEED, BREEAM, FITWEL et autres, en plus de répondre aux exigences de qualité de l'air intérieur (RFP). Les produits indiqués sont certifiés GREENGUARD Gold.

Avec tout cela, INCLASS montre son engagement total envers la santé, l'environnement et l'excellence envers le client.

CERTIFICATIONS



ISO 9001
Quality Management Systems



ISO 14001
Environmental Management Systems



PRODUCT
CERTIFIED FOR
LOW CHEMICAL
EMISSIONS:
UL.COM/GG
UL 2818

MATÉRIAUX

INCLASS est fermement engagé dans la production de produits respectueux de l'environnement et qui contribuent à créer des espaces sûrs et sains. Notre entreprise s'efforce constamment de réduire et d'éliminer les produits chimiques dangereux ou nocifs dans tous nos produits et processus, et dans une recherche continue d'alternatives meilleures et plus sûres qui arrivent sur le marché. Ces efforts comprennent, sans s'y limiter :

L'utilisation de colles à base d'eau qui ne contiennent pas de solvants.

Collaborer avec des fournisseurs qui garantissent que leur bois est issu de forêts durables.

L'utilisation de pièces de bois composites conformes aux normes CARB ATCM Phase II et TSCA Titre VI pour les faibles émissions de formaldéhyde.

Encourager l'utilisation de tissus naturels et de tissus labellisés OEKO-TEX® ou ECOLABEL.

L'utilisation de mousses de rembourrage exemptes de chlorofluorocarbures (CFC) et d'hydrochlorofluorocarbures (HCFC).

Partout où les normes de qualité le permettent, les produits contiennent des matières premières recyclées.

La plupart de nos produits peuvent être complètement séparés pour un recyclage approprié.


ECO PASSPORT DU PRODUIT

Chaise avec piètement à 4 pieds

Code: ARY0010




COMPOSITION




Matériel	Poids
Acier	2,56kg 49,4%
PP	2,25kg 43,5%
TR	0,24kg 4,6%
Peinture/chrome	0,12kg 2,3%
PE	0,01kg 0,2%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Chaise avec piètement traineau

Code: ARY0020




COMPOSITION




Matériel	Poids
Acier	3,67kg 57,9%
PP	2,25kg 35,5%
TR	0,24kg 3,8%
Peinture/chrome	0,17kg 2,7%
PE	0,01kg 0,1%

RECYCLAGE




RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Assise tapissée (supplément)

Code: ARY0000AS




COMPOSITION



Matériel	Poids
Tissu et cuir	0,28kg 75,4%
Mousse PU	0,09kg 24,6%

RECYCLAGE



RECYCLABILITÉ



Produit certifié GREENGUARD Gold.

**** Le matériau de l'assise est répertorié dans la chaise complète. Dans cette option, seuls les matériaux supplémentaires utilisés pour le revêtement de l'assise sont répertoriés.

REMARQUES

*** Les pourcentages indiqués dans cette fiche peuvent présenter de légères variations dues aux changements de fournisseur de certaines matières premières et aux arrondis des chiffres.

*** Les pourcentages pour les plateaux varient selon le matériau et la finition. Pour les pourcentages exacts des plateaux, consultez la fiche technique du plateaux.



Conçue par Jonathan Prestwich, ARYN est une collection de chaises polyvalentes qui franchit facilement les frontières entre les espaces domestiques et les espaces professionnels. Un design transversal, contemporain, gracieux et frais qui équilibre la forme et la fonctionnalité tout en fascinant de toutes les perspectives. Conçues pour optimiser le confort, les chaises ARYN sont disponibles avec deux tailles de dossiers à élire, ainsi que des structures à quatre pieds ou des pieds en tige au choix. Les assises et dossiers sont disponibles parmi un large éventail de couleurs en plastique. Pour un meilleur confort, les assises peuvent également être entièrement tapissées. Son design gracieux et intemporel, ainsi que ses fonctionnalités assurent des années d'usage quotidien, dans un grand nombre d'espaces publics et privés.

ÉCOLOGIE

Fiche environnementale du produit [+info](#)

Les processus de production d'INCLASS sont certifiés selon les normes environnementales ISO 14001 afin de minimiser tout impact sur l'environnement. Certificat ISO 14001 [+info](#)

 Les produits marqués avec le point vert ont obtenu la certification Greenguard Gold dans toutes leurs versions tapissées avec tous les tissus de notre nuancier, à l'exception des groupes G10 et G11. Certification GREENGUARD Gold [+info](#)

NORMES DE QUALITÉ

Le système de gestion de la qualité de INCLASS est certifié conformément à la norme ISO 9001 dans la conception, fabrication et les procédures de vente de ses produits.
Certificat ISO 9001 [+info](#)

UNE-EN 16139:2013vc2015 - Mobilier - Résistance, durabilité et sécurité - Exigences applicables aux sièges à usage collectif

ANSI/BIFMA X5.4:2020 - Assise publique ou lounge - Confort, sécurité et durabilité

*Les produits INCLASS ont été largement testés pour dépasser les normes de test de l'industrie à AIDIMME.
AIDIMME est membre du réseau européen INNOVAWOOD et ses laboratoires d'essais sont accrédités par l'ENAC.*

GARANTIE 5 ANS

Conditions de garantie [+info](#)

FINITIONS

Tapiserie : à choisir parmi les tissus et les cuirs de notre nuancier.

Nuancier des finitions [+info](#)

Polypropylène




Piètements d'acier

Couleurs M1



Couleurs M2

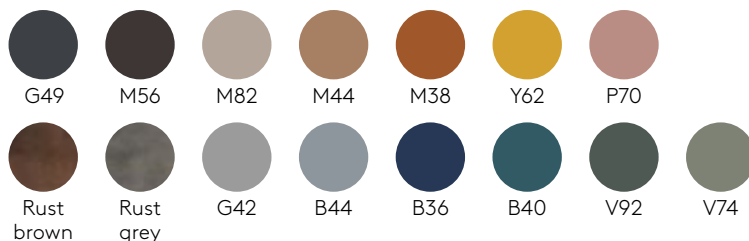

Chrome



Chaise avec piètement traineau

Code: ARY0020



Chaise empilable avec assise et dossier en polypropylène et avec piètement traineau en tige d'acier ronde. En option, l'assise peut être tapissée.

Finitions assise et dossier : surface micro-texturée mate des deux côtés. Disponible dans les couleurs PP1 de la carte d'échantillons en polypropylène.

Finitions du piètement : en chrome ou en peinture polyester thermodurcissable avec une finition micro-texturée dans les couleurs M1 et M2 du nuancier métallique.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



Chaise avec piètement à 4 pieds

Code: ARY0010



Chaise empilable avec assise et dossier en polypropylène et avec piètement 4 pieds en tube d'acier rond. En option, l'assise peut être tapissée.

Finitions assise et dossier : surface micro-texturée mate des deux côtés. Disponible dans les couleurs PP1 de la carte d'échantillons en polypropylène.

Finitions du piètement : en chrome ou en peinture polyester thermodurcissable avec une finition micro-texturée dans les couleurs M1 et M2 du nuancier métallique.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



Assise tapissée (supplément)

Code: ARY0000AS



Assise entièrement tapissée en option. Intérieur en polypropylène recouvert de mousse de polyuréthane souple.

Tapiserie : à choisir parmi les tissus et les cuirs de notre nuancier.

 Produit certifié GREENGUARD Gold.

COM 140cm / par unité	
1 unité	65cm
8 ou plus unités	60cm
* COM seront considérés comme G2	

ÉLÉMENTS & ACCESSOIRES EN OPTION

Code	Description
	ARY0160 Tablette d'écriture pour chaise avec piètement à 4 pieds (droite) Tablette d'écriture amovible pour les droitiers. Entièrement rabattable. Structure métallique en chrome et joint en fonte d'aluminium poli. La tablette d'écriture est en HPL noir de 12mm. * Avec la tablette d'écriture assemblée, la chaise n'est pas empilable.
	ARY0161 Tablette d'écriture pour chaise avec piètement à 4 pieds (gauche) Tablette d'écriture amovible pour les gauchers. Entièrement rabattable. Structure métallique en chrome et joint en fonte d'aluminium poli. La tablette d'écriture est en HPL noir de 12mm. * Avec la tablette d'écriture assemblée, la chaise n'est pas empilable.
	ARY0162 Tablette d'écriture pour chaise avec piètement traineau (droite) Tablette d'écriture amovible pour les droitiers. Entièrement rabattable. Structure métallique en chrome et joint en fonte d'aluminium poli. La tablette d'écriture est en HPL noir de 12mm. * Avec la tablette d'écriture assemblée, la chaise n'est pas empilable.
	ARY0163 Tablette d'écriture pour chaise avec piètement traineau (gauche) Tablette d'écriture amovible pour les gauchers. Entièrement rabattable. Structure métallique en chrome et joint en fonte d'aluminium poli. La tablette d'écriture est en HPL noir de 12mm. * Avec la tablette d'écriture assemblée, la chaise n'est pas empilable.
	ARY0170OP Clips de liaison pour chaises avec piètement traineau
	ARY0120OP Chariot de transport
	ARY0130 Piètement traineau renforcé (supplément)
	ARY0140OP 4 patins en feutre pour piètement à 4 pieds (supplément)
	ARY0150OP 4 patins en feutre pour piètement traineau (supplément)

CERTIFICATES OF COMPLIANCE



All GREENGUARD Gold Certified products are on [UL.SPOT](https://www.ul.com/spot).
Please visit it for the latest update.

ARYN

designed — Jonathan Prestwich



INCLASS

Aperçu



Chaise piètement en tige d'acier
[certificat +](#)



Chaise à 4 pieds
[certificat +](#)

Éléments & accessoires en option



Tablette d'écriture
(droite/gauche)

Convient uniquement pour
chaises à 4 pieds et avec
piètement en tige d'acier
[certificat +](#)

CERTIFICATE OF COMPLIANCE



INCLASS

ARYN Chair with sled frame

224126-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE

GREENGUARD Certification Criteria for Office Furniture Seating

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	4.5 (3.65 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	80	µg/m ³
Individual VOCs ^(D)	-	1/4 CREL or 1/100th TLV	-

^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.

^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

^(C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.

^(D) Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE



INCLASS

ARYN Chair with 4 leg frame

224128-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE

GREENGUARD Certification Criteria for Office Furniture Seating

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	4.5 (3.65 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	80	µg/m ³
Individual VOCs ^(D)	-	1/4 CREL or 1/100th TLV	-

^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.

^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

^(C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.

^(D) Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE



INCLASS

ARYN Writing tablet accessory for sled
frame chair (right/left)

227930-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE

GREENGUARD Certification Criteria for Office Furniture Seating

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	4.5 (3.65 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	80	µg/m ³
Individual VOCs ^(D)	-	1/4 CREL or 1/100th TLV	-

^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.

^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

^(C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.

^(D) Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE



INCLASS

ARYN Writing tablet accessory for 4 leg
frame chair (right/left)

227929-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

CERTIFICATE OF COMPLIANCE

GREENGUARD Certification Criteria for Office Furniture Seating

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	4.5 (3.65 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	80	µg/m ³
Individual VOCs ^(D)	-	1/4 CREL or 1/100th TLV	-

^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.

^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

^(C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.

^(D) Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.