



Ribbon

Acoustic wall panels



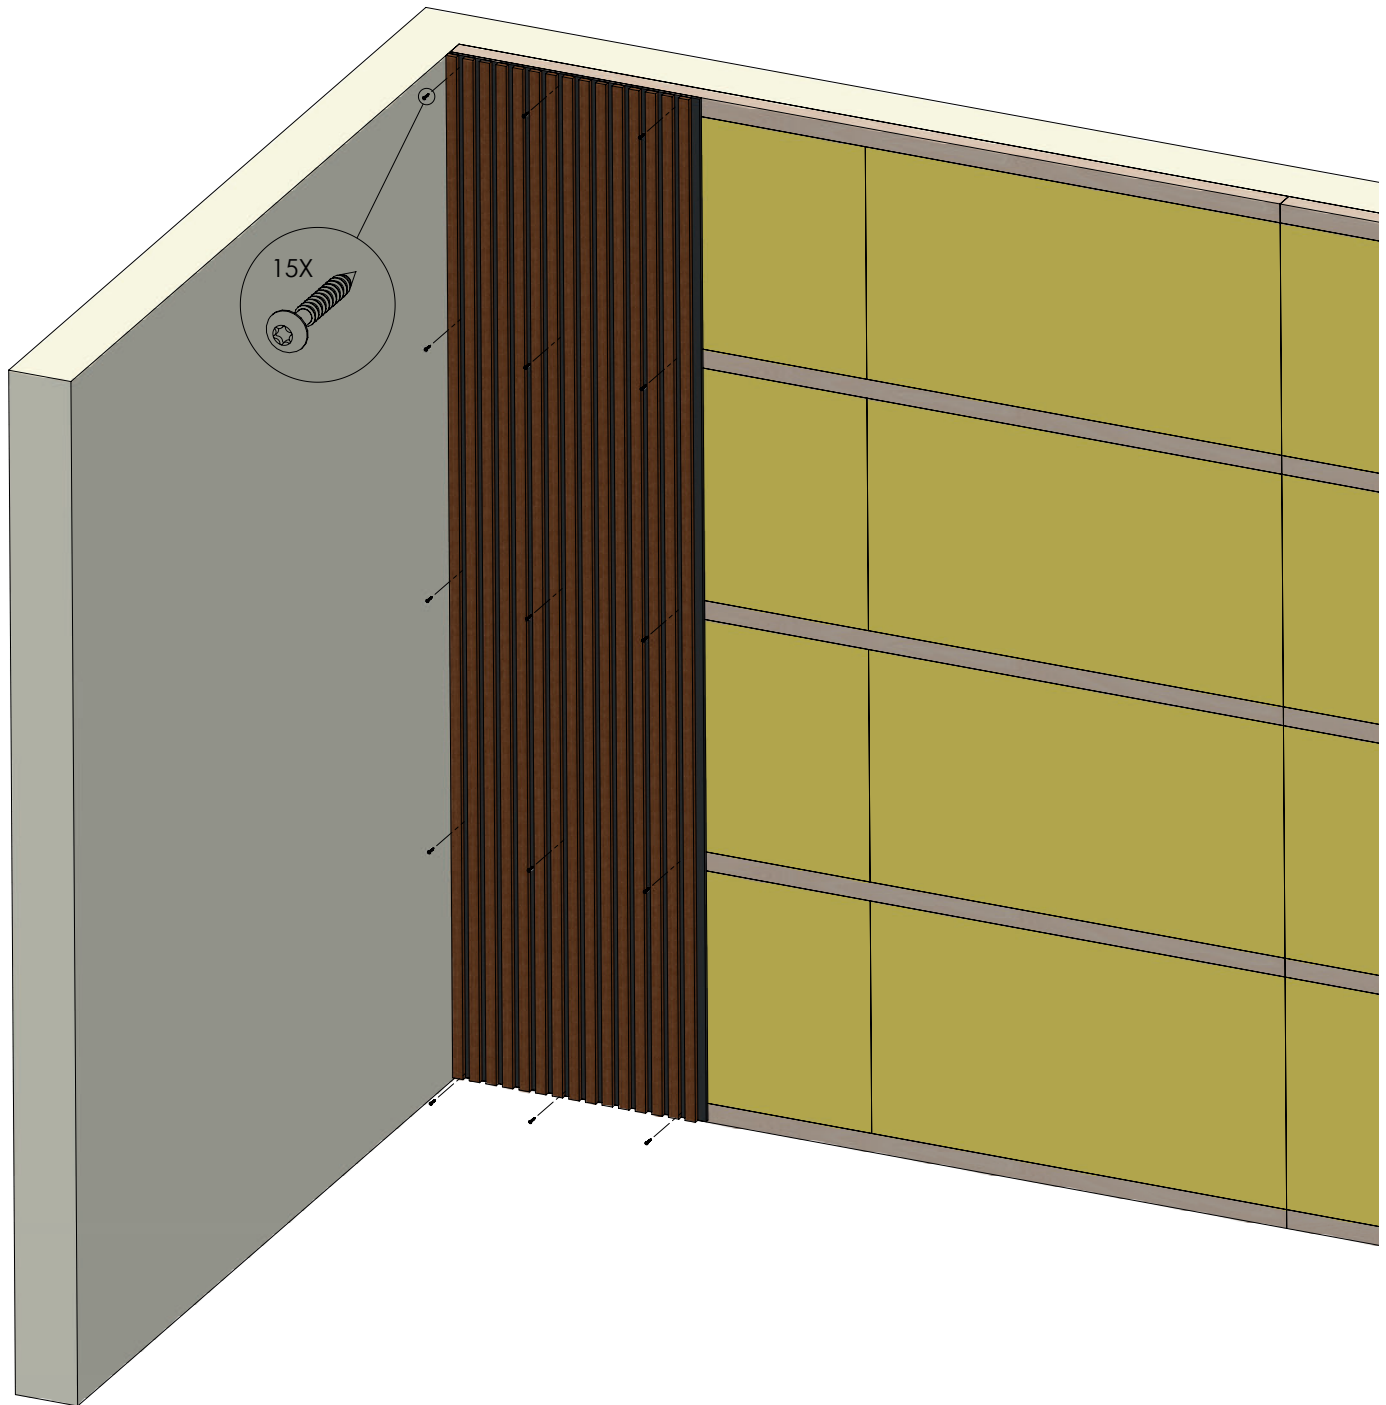


There are different ways to mount Ribbon. You can screw or glue the panels on existing walls / ceilings. If you want even better acoustics in the room, you can unbolt 45x45mm wooden rule and set insulation (45mm) in between, then you achieve sound class A.

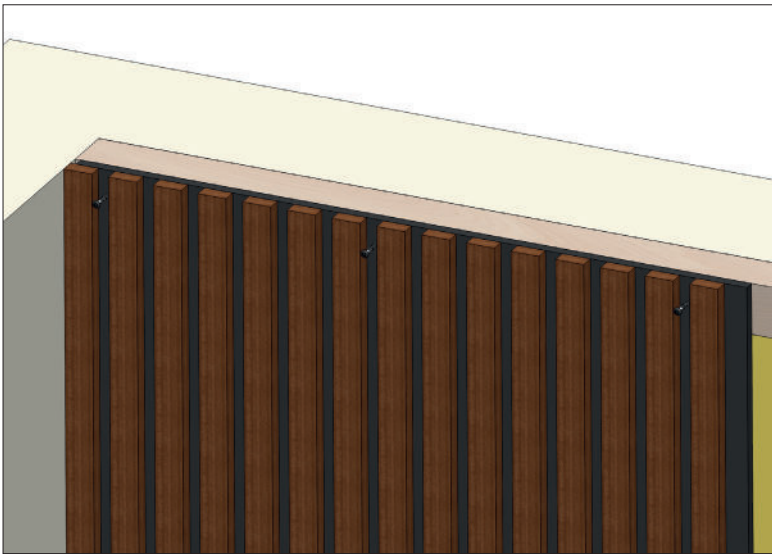


Screw or glue up the panels directly on the wall.


Screwing is easy. Our black screws becomes almost like concealed mounting. 15 screw/panel.

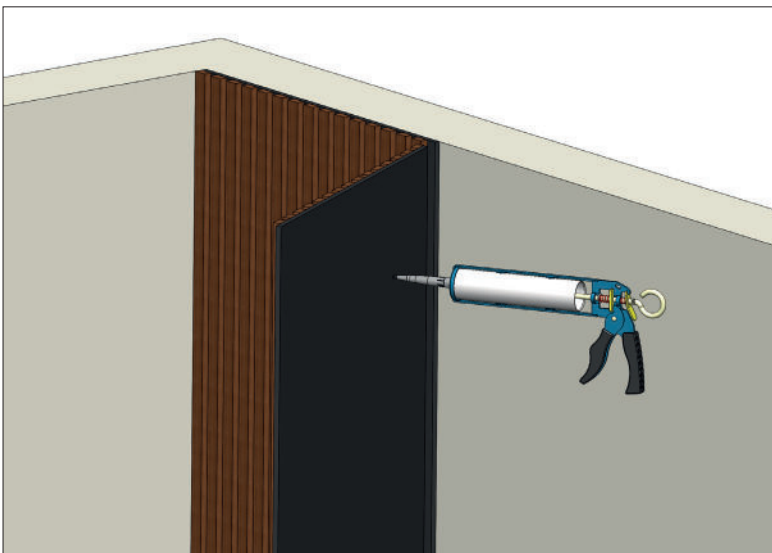

If you choose gluing, you get completely hidden mounting. Our fast-curing glue does it easy to glue the panels. Start always to glue on the panel.

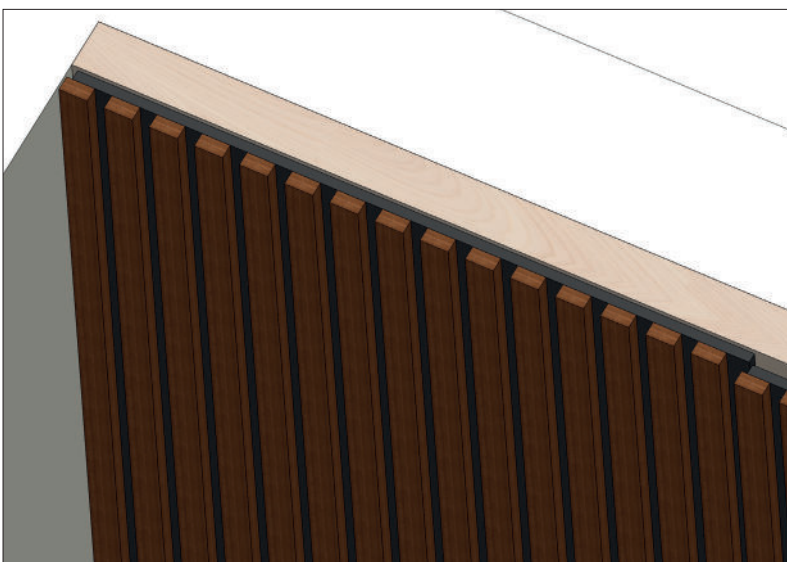


On one side of the panels goes one wooden slats over the edge. It is there to hide the joint.

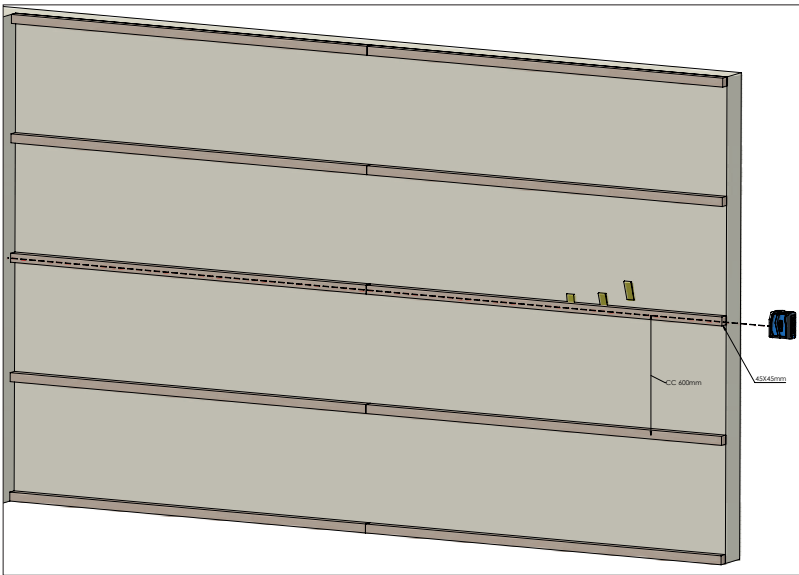


Better acoustics?

Mount the acoustics panels with 45mm insulation behind, then you achieve sound class A.

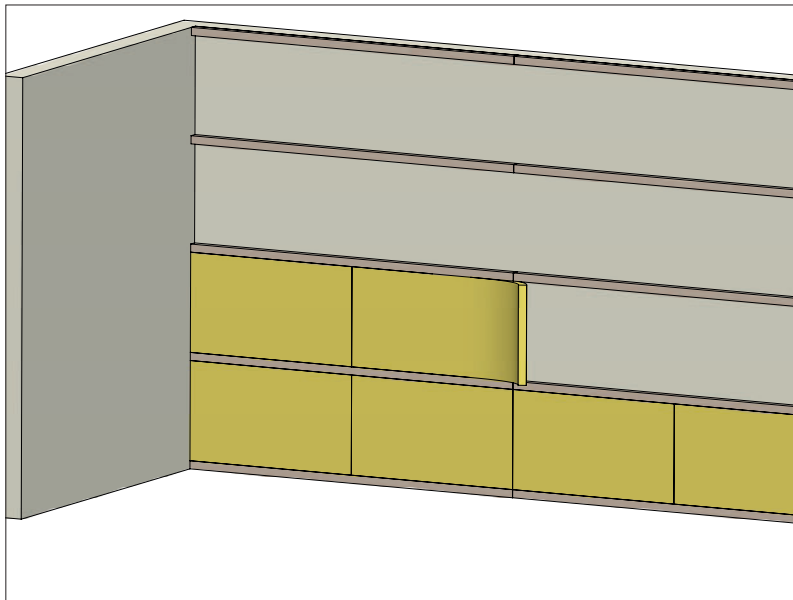


Start to unbolt the wall with 45x45mm wooden rule. Mount the wooden rule horizontal and C-C 600mm between them. Remember to get the wooden rules straight to get as smooth ribbed wall as possible.

Put your 45mm insulation between the wooden rule.

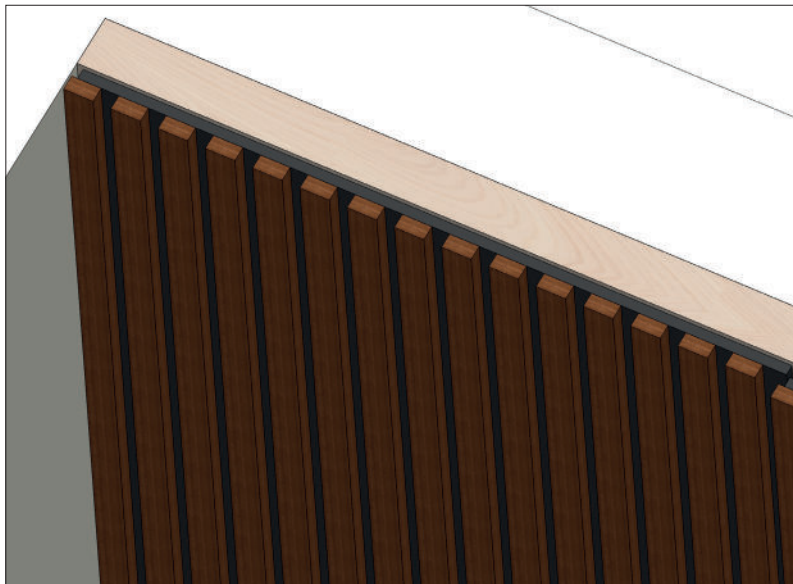


Screw up the panels on the wooden rule. 15 screw/panel.

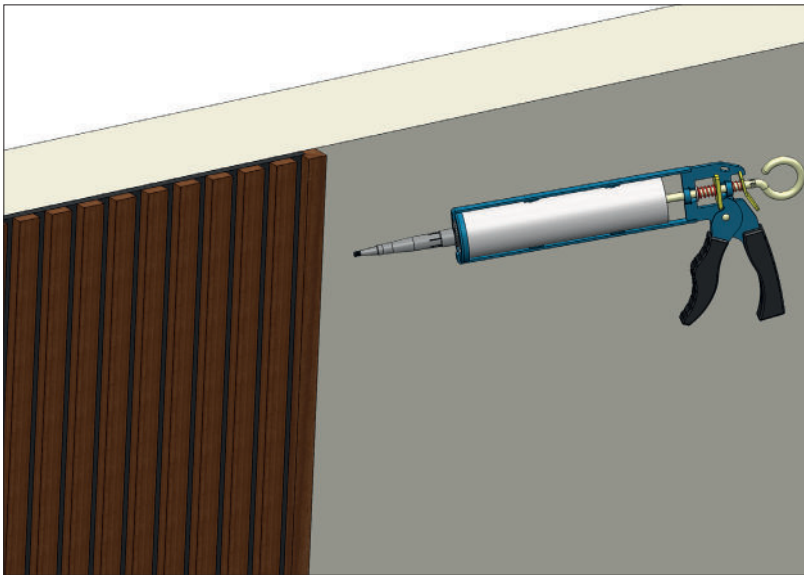


If you want to finish the ribbed wall in the middle of a room? Glue our finishing strip to get a nice finish.

Glue on the finishing strip, press it to the panel and wall.

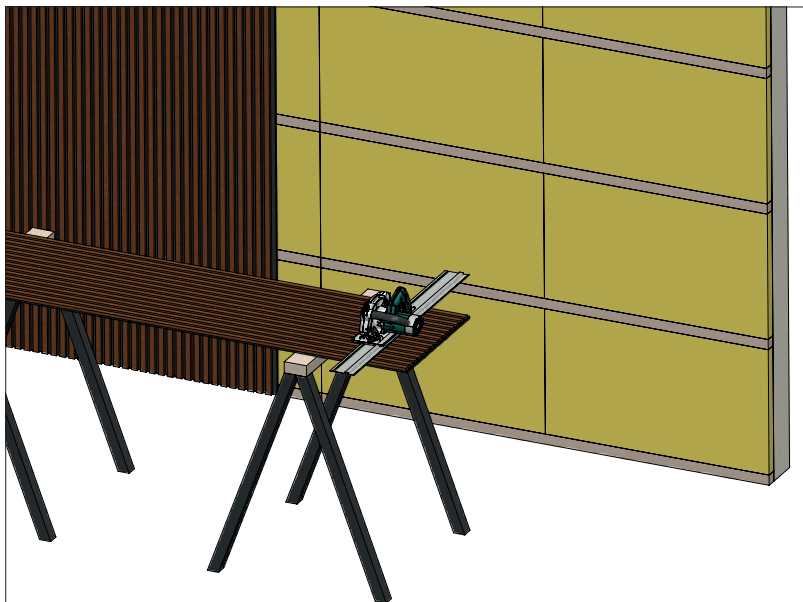

Are the rib panels too high?

Adjusting the height is easy with one circular saw and guide rail. Drop/file the edge of the wooden slats afterwards. Should the wooden slats sit loose after sawing you can glue the slats on the acoustic blanket with super glue.

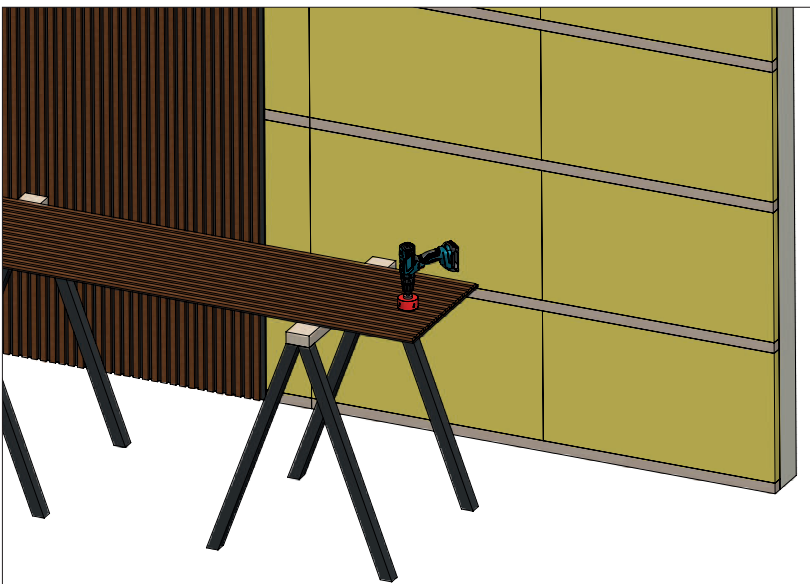

Switches/connectors/spotlights.

With a hole saw you make the holes for switches/connectors/spotlights. You can also saw out with a jigsaw there are other forms. Should the wooden slats sit loose after the hole you can glue the slats on the acoustic blanket with super glue.

Ribbon Diamond

Wall panels

Design: Team Glimakra/Tranås



GLIMAKRA
OF SWEDEN



Ribbon Diamond

Wall panels

Design: Team Glimakra/Tranås



Ribbon-Diamond is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. The wall panels in this series are lacquered and give a shimmering surface. A large selection of veneers from our production, as well as several choices among surface treatments, together with black, light grey and white Recosilent, means that there are many options for you to find a ribbed panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

RIBBON-DIAMOND

Ribbon-Diamond is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimakra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

INFORMATION

Surface layer	0.6mm FSC certified veneer.
Surface treatment	Lacquered.
Sheet material	12 mm standard or solid black MDF
Acoustic blanket	RecoSilent (RS), 9mm recycled PET. Black, light grey or white.
Thickness	22 mm
Sizes	2400x600mm or 2960x600mm. Can be cut for extra.
Mounting	Screw (15pcs / panel) or glued (0.5 / panel) easily in place.
Manufacturing	Tranås and Glimakra

SUSTAINABILITY

Ribbon-Diamond uses only wood for veneers from sustainably managed forests in accordance with the FSC's guidelines. The product meets Möbelfakta's requirements for the environment and responsible supply chains.

PRESCRIPTION TEXT

Ribbon-Diamond, Classic Oak black RecoSilent, 2400x600mm

FIRE PROPERTIES

Standard range:

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	D-s2,d0

FR (FR = Fireclass)

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	B-s1,d0 or B-s2,d0

Prescription text at FR: Ribbon-Diamond, Article name + FR




Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR

CERTIFICATE

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09
(Acoustics workshop, laboratory accredited by Swedack)

NRC value: (Report 3235-R1, -R2, Date 2023-10-11, Akustikverkstan)

Mounting directly to wall	Annex 3235-M10	NRC=0,55
Mounting with 45mm air gap	Annex 3235-M11	NRC=0,77
Mounting with 45mm mineral wool	Annex 3235-M12	NRC=1,00

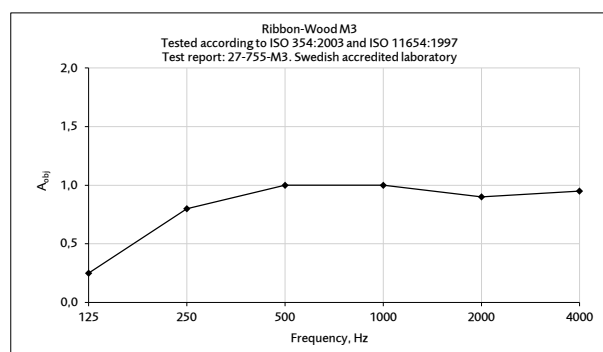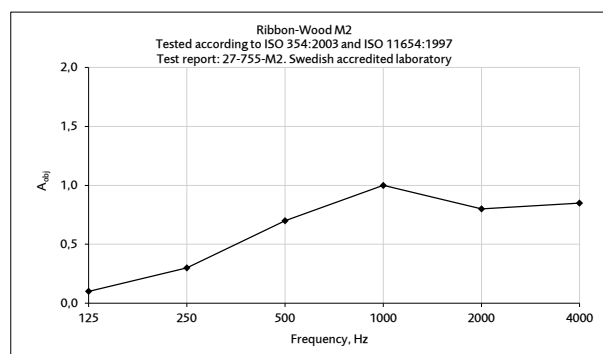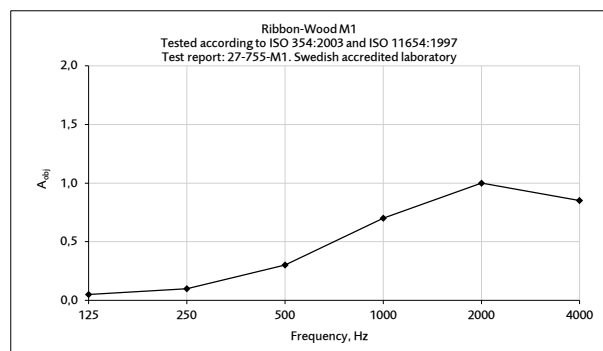

Equivalent absorption area per m² screen area (m²S / m²)

Ribbon Diamond


Wall panels

Design: Team Glimakra/Tranås




GLIMAKRA
OF SWEDEN


MEASURE

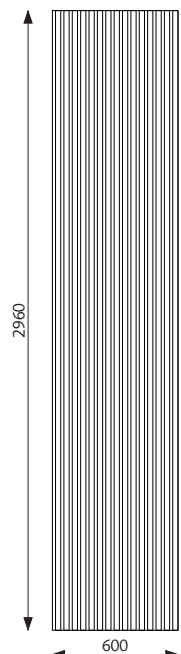


Weight 13kg
Area 1.78m²

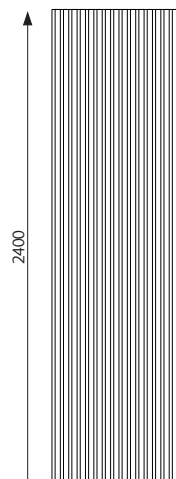


Weight 11kg
Area 1.44m²

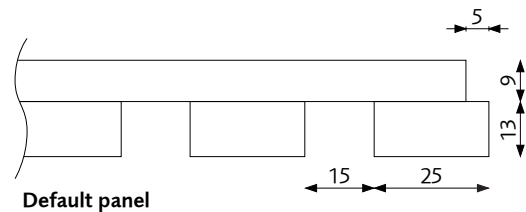

Default panel

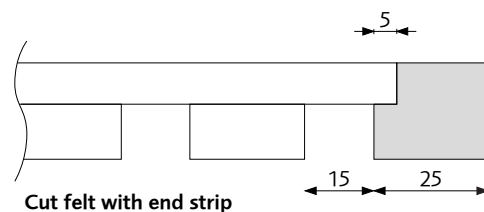

Cut felt with end strip

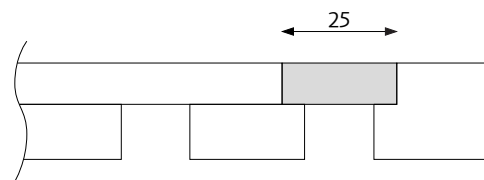

End strip with splicing strip

OUR STANDARD RANGE



Diamond Oak,
RS black



Diamond Oak,
RS grey



Diamond Oak,
RS white



Diamond Ash,
RS black



Diamond Ash,
RS grey



Diamond Ash,
RS white



Diamond Walnut,
RS black



End slat



Felt strip

Ribbon Diamond

Wall panels

Design: Team Glimakra/Tranås



GLIMAKRA
OF SWEDEN



Ribbon Wood

Wall panels

Design: Team Glimakra/Tranås



Ribbon Wood

Wall panels

Design: Team Glimakra/Tranås



Ribbon-Wood is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. A large selection of veneers from our own production, as well as several options among surface treatments, together with black and light gray Recosilent means that the options are many for you to find a rib panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

RIBBON-WOOD

Ribbon-Wood is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

INFORMATION

Surface layer	0.6mm FSC certified veneer.
Surface treatment	Stained or untreated.
Sheet material	12 mm standard or solid black MDF
Acoustic blanket	RecoSilent (RS), 9mm recycled PET. Black or light gray.
Thickness	22 mm
Sizes	2400x600mm or 2960x600mm. Can be cut for extra.
Mounting	Screw (15pcs / panel) or glued (0.5 / panel) easily in place.
Manufacturing	Tranås and Glimåkra

SUSTAINABILITY

Ribbon-Wood uses only wood for veneers from sustainably managed forests in accordance with the FSC's guidelines. The product meets Möbelfakta's requirements for the environment and responsible supply chains.

PRESCRIPTION TEXT

Ribbon-Wood, Classic Oak black RecoSilent, 2400x600mm

FIRE PROPERTIES

Standard range:

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	D-s2,d0

FR (FR = Fireclass)

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	B-s1,d0 or B-s2,d0

Prescription text at FR: Ribbon-Wood, Article name + FR

Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR




CERTIFICATE

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09

(Acoustics workshop, laboratory accredited by Swedack)

NRC value: (Report 3235-R1, -R2, Date 2023-10-11, Akustikverkstan)

Mounting directly to wall	Annex 3235-M10	NRC=0,55
Mounting with 45mm air gap	Annex 3235-M11	NRC=0,77
Mounting with 45mm mineral wool	Annex 3235-M12	NRC=1,00

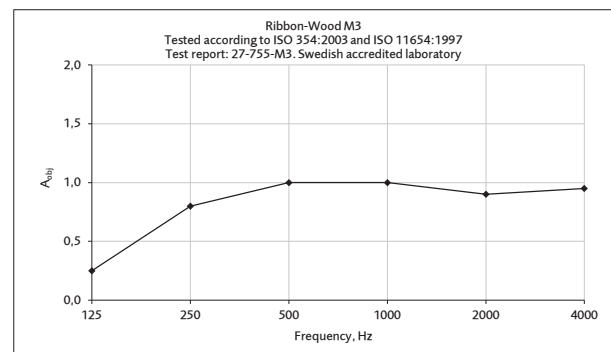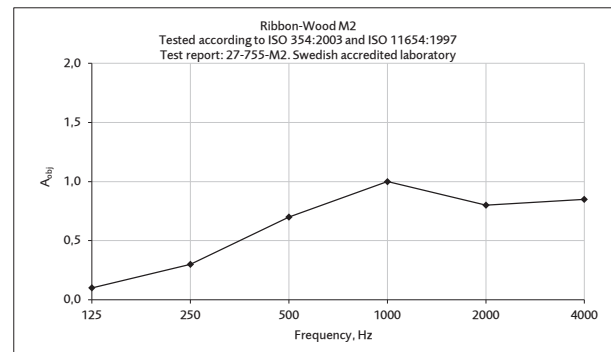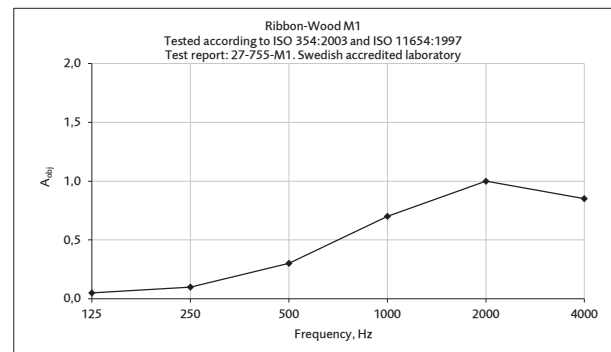

Equivalent absorption area per m² screen area (m²S / m²)


Ribbon Wood

Wall panels


Design: Team Glimakra/Tranås



MEASURE

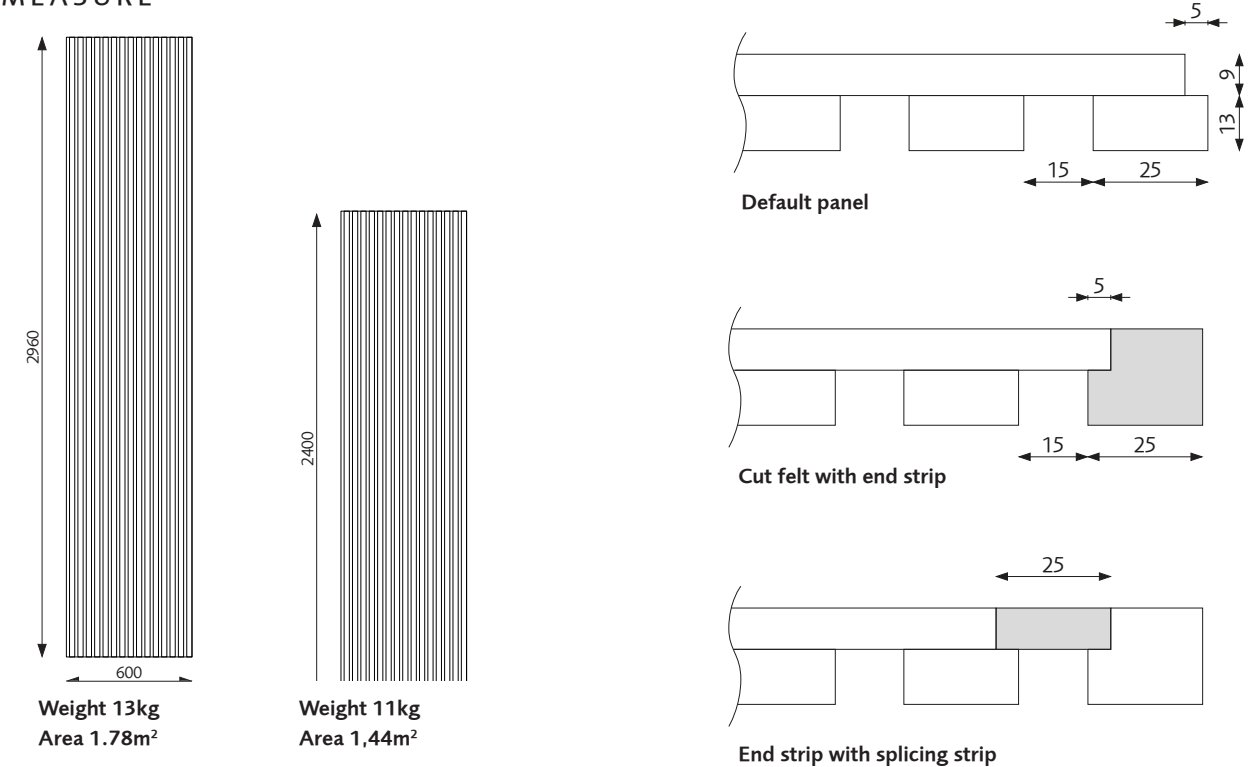

OUR STANDARD RANGE

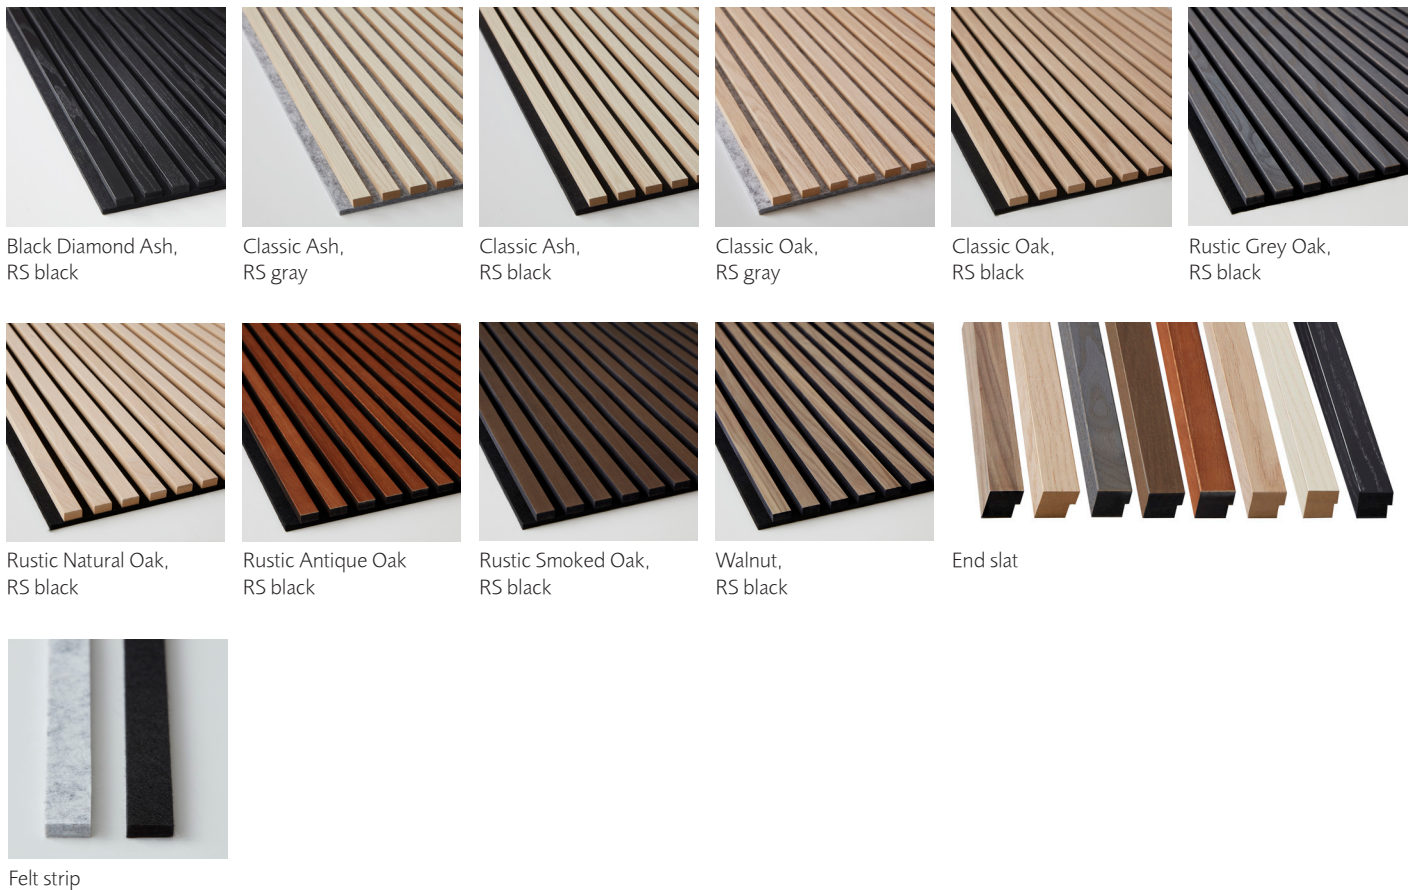

Ribbon Wood

Wall panels

Design: Team Glimakra/Tranås

