

INCLASS

Distributeur SUISSE



REACTIV OFFICE DESIGN

+41 22 797 05 12

www.rod-design.ch



# Varya tapiz

designed by Simon Pengelly



VARYA TAPIZ

# The collection



## EN

The VARYA TAPIZ collection gather all the upholstered versions in the VARYA family keeping the same transversal and timeless spirit of the collection with plastic seats. With its many versions, the collection configures one of the largest and most complete ranges on the market. An extensive family of chairs, armchairs, stools and benches that are generated by combining comfortable mono-shells, available with 4 different patterns of upholstery: soft, plain, horizontal stitching or quilted, with a broad range of base types. The wide variety of possible combinations and finishes enables the configuration of endless customized designs that can easily fit into diverse environments both public and private keeping always a coherent project aesthetic.

## ES

La colección VARYA TAPIZ reúne todas las versiones tapizadas de la familia VARYA manteniendo el mismo espíritu transversal y atemporal que caracteriza a la colección con asientos de plástico. Con sus numerosas versiones, la colección se configura como una de las gamas más grandes y completas del mercado. Una amplia familia de sillas, sillones, taburetes y bancos que se generan combinando confortables asientos, disponibles con 4 patrones diferentes de tapicería: lisa, soft, con costuras horizontales o quilted, con una variada gama de bases. La amplia variedad de combinaciones y acabados posibles permiten configurar infinitos diseños personalizados que puedan adaptarse con facilidad a diversos entornos, tanto públicos como privados, manteniendo siempre una estética coherente en el proyecto.

## FR

La collection VARYA TAPIZ rassemble toutes les versions rembourrées de la famille VARYA tout en conservant le même esprit intemporel et transversal qui caractérise la collection avec des coques en polypropylène. Avec ses nombreuses versions, la collection est configurée comme l'une des gammes les plus importantes et les plus complètes du marché. Une large famille de chaises, fauteuils, tabourets et bancs qui sont générés en combinant des sièges confortables, disponibles avec trois modèles de rembourrage différents: lisse, souple, avec des surpiqûres horizontales ou tapisserie matelassé, avec une gamme variée piètements. La grande variété de combinaisons et de finitions possibles vous permet de configurer des conceptions personnalisées infinies qui peuvent être facilement adaptées à divers environnements, publics et privés, en conservant toujours une esthétique cohérente dans le projet.

## DE

Die VARYA TAPIZ-Kollektion umfasst alle gepolsterten Versionen der VARYA-Familie und behält dabei den gleichen transversalen und zeitlosen Geist bei, der die Kollektion mit Kunststoffsitzen auszeichnet. Mit ihren zahlreichen Versionen ist die Kollektion eine der größten und vollständigsten Sortimente auf dem Markt. Eine große Familie von Stühlen, Armlehnstühlen, Barhockern und Bänken, die durch die Kombination von bequemen Sitzen mit drei verschiedenen Polstermustern: glatt, leger, mit horizontalen oder gekreuzten Ziernähten und einer Vielzahl von Fußgestellen entstehen. Die Vielzahl von Kombinationen und möglichen Materialausführungen gestatten die Konfiguration von unendlichen, personalisierten Designs, die leicht an verschiedene öffentliche und private Umgebungen angepasst werden können, wobei stets eine einheitliche Ästhetik im Projekt beibehalten wird.



INCLASS



VARYA TAPIZ

229





INCLASS











# Overview



— **4 leg frame**  
Pie 4 patas

— **4 leg armchair**  
Sillón 4 patas

— **4 leg frame**  
Pie 4 patas  
**Non-stackable /**  
no apilable

— **4 wooden leg frame**  
Pie 4 patas de madera

— **4 plastic leg frame**  
Pie 4 patas de plástico

— **4 leg frame chair**  
Silla con pie 4 patas  
**high - counter /** alta - media



— **Sled base**  
Pie de varilla

— **Sled base armchair**  
Sillón pie de varilla

— **Cantilever base**  
Base patín

— **Cantilever base armchair**  
Sillón base patín

— **Sled frame chair**  
Silla con base trineo  
**high - counter /** alta - media



— **Steel swivel base**  
Base giratoria de acero

— **Steel swivel base**  
Base giratoria de acero  
**+ arms /** brazos

— **Aluminum swivel base**  
Base giratoria de aluminio

— **Aluminum swivel base**  
Base giratoria de aluminio  
**+ arms /** brazos

— **4 leg frame**  
Pie 4 patas  
**+ casters /** ruedas

— **4 leg frame**  
Pie 4 patas  
**+ casters /** ruedas  
**+ writing tablet /** pala escritura  
**+ basket /** cesto



— **Aluminum swivel base**  
Base giratoria de aluminio  
**+ casters /** ruedas

— **Aluminum swivel base**  
Base giratoria de aluminio  
**+ arms /** brazos  
**+ casters /** ruedas

— **Aluminum swivel base**  
Base giratoria de aluminio  
**+ casters /** ruedas  
**+ gas lift /** gas

— **Aluminum swivel base**  
Base giratoria de aluminio  
**+ arms /** brazos  
**+ casters /** ruedas  
**+ gas lift /** gas

— **Bench 2-5 seater**  
Banco 2-5 plazas

# Overview



— **Sled frame stool**  
Taburete base trineo  
**high - medium /** alto - medio

— **Swivel base stool**  
Taburete base giratoria  
**high - medium /** alto - medio

— **4 leg base stool**  
Taburete 4 patas  
**high - medium /** alto - medio

— **4 wooden leg base stool**  
Taburete 4 patas madera  
**high - medium /** alto - medio

## Upholstery options / Opciones de tapizado



— **Plain upholstery**  
Tapicería lisa

— **Soft fibre upholstery**  
Tapicería fibra suave

— **Horizontal stitching**  
Costuras horizontales

— **Quilted upholstery**  
Tapizado quilted

## Accessories / Accesorios



— **Reinforced sled base**  
Base de varilla reforzada

— **Linking clips**  
Clips de unión

— **Trolley**  
Carro


## Design / Diseño

Designed by Simon Pengelly  
[www.simonpengelly.com](http://www.simonpengelly.com)



Many of the products of this collection are GREENGUARD Gold certified by UL Solutions.

Gran parte de los productos de esta colección, cuentan con el certificado GREENGUARD Gold de UL Solutions.



## Finishes / Acabados

### EN

**Upholstery:** available in all the upholstery materials indicated in the finishes book. The shells are available with four versions of upholstery: straight, soft, quilted or with horizontal seams.

**Metallic frames:** in chrome or micro-textured powder coated in colours M1 and M2 from the metallic swatch card. The die cast aluminum swivel bases are available in polished finishing.

**Plastic finishes:** available in colours PP1 from the polypropylene swatch card.

**Wooden legs:** are produced in solid oak and are available in any of the oak finishes from the wood swatch card.

### ES

**Tapicerías:** disponible en todos los materiales de tapicería indicados en el libro de acabados. Las carcasas están disponibles con cuatro tipos de tapicería: lisa, soft, quilted o con costuras horizontales.

**Estructuras metálicas:** en cromo o pintura de poliéster termoendurecida con acabado micro-texturizado en los colores M1 y M2 del libro de acabados de metal. Las bases giratorias de aluminio inyectado están disponibles en acabado pulido.

**Acabados de plástico:** disponible en todos los colores PP1 del libro de acabados de polipropileno.

**Patas de madera:** están fabricadas con roble macizo y están disponibles en todos los acabados para roble del libro de acabados.



## DECLARACIÓN AMBIENTAL

INCLASS invierte constantemente en nuevas soluciones con el objetivo de preservar la salud y el medio ambiente. Esta línea de productos ha sido diseñada considerando una serie de criterios ecológicos, de salud y de sostenibilidad.

Todos nuestros productos se fabrican localmente en nuestra planta de producción certificada ISO 9001 e ISO 14001. Para ello, INCLASS es auditado anualmente por Bureau Veritas, compañía líder mundial en servicios de certificación. El Sistema de Gestión Ambiental ISO 14001 es el más reconocido a nivel mundial.

Todos los artículos son diseñados minimizando el número de componentes y maximizando el número de piezas intercambiables. INCLASS prioriza el uso de materiales reciclables y sostenibles con el medio ambiente, así como procesos de producción limpios. La empresa clasifica, separa y recicla todos los residuos que genera en su planta de producción bajo estrictos procedimientos certificados.

Para evitar desperdicios innecesarios y minimizar el uso de energía y recursos naturales, los productos INCLASS están diseñados con una estética atemporal, alejados de las tendencias a corto plazo, para ser duraderos. Los productos someten a tests, en laboratorios independientes, para garantizar que cumplen con estrictos estándares internacionales de calidad, seguridad y durabilidad.

INCLASS está comprometida con la fabricación de productos que ayuden a crear entornos más saludables, seguros y sostenibles. La empresa invierte y trabaja continuamente para reemplazar los químicos peligrosos o nocivos en sus productos a medida que surgen alternativas nuevas, más seguras y más ecológicas. Como resultado, muchos de nuestros productos cuentan con la certificación GREENGUARD Gold emitida por Underwriters Laboratories. Los productos con certificación GREENGUARD están científicamente probados para cumplir con uno de los estándares de emisiones químicas de terceros más rigurosos del mundo, lo que ayuda a reducir la contaminación del aire en espacios interiores y el riesgo de exposición a productos químicos nocivos. Los productos con esta certificación contribuyen también al logro de la calificación de edificio verde, con LEED, BREEAM, FITWEL y otros, además de cumplir con los requisitos de calidad del aire interior (RFP). Los productos indicados tienen la certificación GREENGUARD Gold.

Con todo ello, INCLASS muestra su pleno compromiso con la salud, el medio ambiente y la excelencia hacia el cliente.

## CERTIFICACIONES



ISO 9001  
Quality Management Systems



ISO 14001  
Environmental Management Systems



PRODUCT  
CERTIFIED FOR  
LOW CHEMICAL  
EMISSIONS:  
UL.COM/GG  
UL 2818

## MATERIALES

INCLASS apuesta firmemente por la elaboración de productos respetuosos con el medio ambiente y que contribuyan a crear espacios seguros y saludables. Nuestra empresa trabaja constantemente para reducir y eliminar los químicos peligrosos o nocivos en todos nuestros productos y procesos, y en una búsqueda continua de alternativas mejores y más seguras que están saliendo al mercado. Estos esfuerzos incluyen, entre otros:

El uso de colas a base de agua que no contengan disolventes.

Trabajar con proveedores que garantizan que su madera proviene de bosques sostenibles.

El uso de piezas de madera compuestas que cumplen con las normas CARB ATCM Phase II y TSCA Title VI de bajas emisiones de formaldehído.

Fomentar el uso de tejidos naturales y tejidos etiquetados con certificados OEKO-TEX® o ECOLABEL.

El uso de espumas de tapicería libres de clorofluorocarbonos (CFC) e hidroclorofluorocarbonos (HCFC).

Siempre que los estándares de calidad lo permiten, los productos contienen materias primas recicladas.

La mayoría de nuestros productos se pueden separar por completo para un reciclaje adecuado.


ECO PASSPORT DE PRODUCTO

Silla con base de 4 patas (apilable)

Código: VAR0610




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| PP con fibra de vidrio | 2,45kg 43,3% |
| Acero                  | 2,17kg 38,6% |
| Tejido y piel          | 0,33kg 5,9%  |
| TR                     | 0,28kg 5,0%  |
| Espuma PU              | 0,27kg 4,9%  |
| Pintura/cromo          | 0,11kg 1,9%  |
| PE                     | 0,02kg 0,4%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

Silla con base de 4 patas (no apilable)

Código: VAR0615




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| PP con fibra de vidrio | 2,45kg 47,6% |
| Acero                  | 1,96kg 38,4% |
| Tejido y piel          | 0,33kg 6,5%  |
| Espuma PU              | 0,27kg 5,3%  |
| Pintura/cromo          | 0,09kg 1,7%  |
| PE                     | 0,02kg 0,5%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

Sillón con base de 4 patas

Código: VAR0618




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 3,10kg 47,2% |
| PP con fibra de vidrio | 2,45kg 36,9% |
| Tejido y piel          | 0,33kg 5,0%  |
| TR                     | 0,28kg 4,3%  |
| Espuma PU              | 0,27kg 4,1%  |
| Pintura/cromo          | 0,14kg 2,1%  |
| PE                     | 0,02kg 0,4%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

## Silla con base de 4 patas de plástico

Código: VAR0617



## COMPOSICIÓN




## Material

## Peso

|                        |        |       |
|------------------------|--------|-------|
| PP con fibra de vidrio | 4,29kg | 87,3% |
| Tejido y piel          | 0,33kg | 6,8%  |
| Espuma PU              | 0,27kg | 5,5%  |
| Acero                  | 0,01kg | 0,2%  |
| PE                     | 0,01kg | 0,2%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla con base de 4 patas de madera

Código: VAR0630MA



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| PP con fibra de vidrio | 2,45kg | 36,3% |
| Acero                  | 2,13kg | 32,1% |
| Madera maciza          | 1,14kg | 17,1% |
| Tejido y piel          | 0,33kg | 5,0%  |
| Espuma PU              | 0,27kg | 4,1%  |
| TR                     | 0,26kg | 3,9%  |
| Pintura                | 0,09kg | 1,4%  |
| PE                     | 0,01kg | 0,1%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla con base de trineo

Código: VAR0620



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,43kg | 49,8% |
| PP con fibra de vidrio | 2,45kg | 35,1% |
| Tejido y piel          | 0,33kg | 4,8%  |
| TR                     | 0,28kg | 4,1%  |
| Espuma PU              | 0,27kg | 3,9%  |
| Pintura/cromo          | 0,16kg | 2,2%  |
| PE                     | 0,01kg | 0,1%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Sillón con base de trineo

Código: VAR0628




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 4,15kg 53,6% |
| PP con fibra de vidrio | 2,45kg 31,2% |
| Tejido y piel          | 0,33kg 4,3%  |
| TR                     | 0,28kg 3,6%  |
| Espuma PU              | 0,27kg 3,5%  |
| Pintura/cromo          | 0,19kg 2,4%  |
| PP                     | 0,10kg 1,3%  |
| PE                     | 0,01kg 0,1%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

Silla con base de patín

Código: VAR0652



COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 4,19kg 56,4% |
| PP con fibra de vidrio | 2,45kg 32,6% |
| Tejido y piel          | 0,33kg 4,5%  |
| Espuma PU              | 0,27kg 3,7%  |
| Pintura/cromo          | 0,19kg 2,5%  |
| PC                     | 0,02kg 0,3%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

Sillón con base de patín

Código: VAR0654




COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 6,07kg 64,6% |
| PP con fibra de vidrio | 2,45kg 25,8% |
| Tejido y piel          | 0,33kg 3,5%  |
| Espuma PU              | 0,27kg 2,9%  |
| Pintura/cromo          | 0,27kg 2,9%  |
| PC                     | 0,02kg 0,3%  |

RECICLADO



RECICLABILIDAD






Producto con certificación GREENGUARD Gold.

Silla con base giratoria de 4 radios de acero

Código: VAR0650




COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 3,76kg 45,8% |
| PP con fibra de vidrio | 2,45kg 29,5% |
| Aluminio               | 0,84kg 10,1% |
| Acero + POM            | 0,36kg 4,4%  |
| Tejido y piel          | 0,33kg 4,1%  |
| Espuma PU              | 0,27kg 3,3%  |
| Pintura/cromo          | 0,21kg 2,5%  |
| PA                     | 0,03kg 0,3%  |

RECICLADO



51%

RECICLABILIDAD



97%


Producto con certificación GREENGUARD Gold.

Silla con base giratoria de 4 radios de aluminio

Código: VAR0640



COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| Aluminio               | 2,45kg 38,0% |
| PP con fibra de vidrio | 2,40kg 37,6% |
| Acero                  | 0,81kg 12,9% |
| Tejido y piel          | 0,33kg 5,2%  |
| Espuma PU              | 0,27kg 4,2%  |
| Pintura                | 0,13kg 2,0%  |
| HDPE                   | 0,01kg 0,1%  |

RECICLADO



52%

RECICLABILIDAD



97%


Producto con certificación GREENGUARD Gold.

Silla con base giratoria de 4 radios de aluminio con ruedas

Código: VAR0645




COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| PP con fibra de vidrio | 2,45kg 36,5% |
| Aluminio               | 2,40kg 36,1% |
| Acero                  | 0,60kg 9,1%  |
| Copolímero             | 0,49kg 7,3%  |
| Tejido y piel          | 0,33kg 5,0%  |
| Espuma PU              | 0,27kg 4,1%  |
| Pintura                | 0,13kg 1,9%  |

RECICLADO



48%

RECICLABILIDAD



98%


Producto con certificación GREENGUARD Gold.

Silla con base giratoria de 5 radios de aluminio con ruedas + elevación de gas

Código: VAR0647



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Aluminio               | 2,48kg | 30,9% |
| PP con fibra de vidrio | 2,45kg | 30,3% |
| Acero                  | 1,78kg | 22,3% |
| Copolímero             | 0,61kg | 7,6%  |
| Tejido y piel          | 0,33kg | 4,1%  |
| Espuma PU              | 0,27kg | 3,4%  |
| Pintura                | 0,11kg | 1,4%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Silla con base de 4 patas con ruedas

Código: VAR0632



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 2,53kg | 41,3% |
| PP con fibra de vidrio | 2,45kg | 38,7% |
| Copolímero             | 0,49kg | 7,8%  |
| Tejido y piel          | 0,33kg | 5,9%  |
| Espuma PU              | 0,27kg | 4,3%  |
| Pintura                | 0,11kg | 1,9%  |
| PE                     | 0,01kg | 0,1%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Silla con base de 4 patas con ruedas + cesto

Código: VAR0634



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,56kg | 51,7% |
| PP con fibra de vidrio | 2,45kg | 31,2% |
| Copolímero             | 0,49kg | 6,3%  |
| Tejido y piel          | 0,33kg | 4,8%  |
| Espuma PU              | 0,27kg | 3,5%  |
| Pintura                | 0,16kg | 2,4%  |
| PE                     | 0,01kg | 0,1%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla alta con base de 4 patas

Código: VAR0679



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,93kg | 54,8% |
| PP con fibra de vidrio | 2,45kg | 33,9% |
| Tejido y piel          | 0,33kg | 4,7%  |
| Espuma PU              | 0,27kg | 3,8%  |
| Pintura/cromo          | 0,18kg | 2,5%  |
| PE                     | 0,02kg | 0,3%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla media con base de 4 patas

Código: VAR0677



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,66kg | 53,2% |
| PP con fibra de vidrio | 2,45kg | 35,3% |
| Tejido y piel          | 0,33kg | 4,8%  |
| Espuma PU              | 0,27kg | 4,0%  |
| Pintura/cromo          | 0,17kg | 2,4%  |
| PE                     | 0,02kg | 0,3%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla alta con base de trineo

Código: VAR0669



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 4,85kg | 59,8% |
| PP con fibra de vidrio | 2,45kg | 29,9% |
| Tejido y piel          | 0,33kg | 4,1%  |
| Espuma PU              | 0,27kg | 3,4%  |
| Pintura/cromo          | 0,21kg | 2,7%  |
| PE                     | 0,02kg | 0,1%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Silla media con base de trineo

Código: VAR0667



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 4,41kg | 57,6% |
| PP con fibra de vidrio | 2,45kg | 31,7% |
| Tejido y piel          | 0,33kg | 4,3%  |
| Espuma PU              | 0,27kg | 3,6%  |
| Pintura/cromo          | 0,19kg | 2,6%  |
| PE                     | 0,02kg | 0,2%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Taburete alto con base de 4 patas

Código: VAR0675



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,92kg | 62,4% |
| PP con fibra de vidrio | 1,75kg | 27,7% |
| Tejido y piel          | 0,25kg | 4,1%  |
| Pintura/cromo          | 0,18kg | 2,8%  |
| Espuma PU              | 0,16kg | 2,6%  |
| PE                     | 0,02kg | 0,4%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Taburete medio con base de 4 patas

Código: VAR0670



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,65kg | 60,9% |
| PP con fibra de vidrio | 1,75kg | 29,1% |
| Tejido y piel          | 0,25kg | 4,2%  |
| Pintura/cromo          | 0,17kg | 2,7%  |
| Espuma PU              | 0,16kg | 2,7%  |
| PE                     | 0,02kg | 0,4%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Tabuerete alto con base de trineo

Código: VAR0665



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 4,85kg | 67,0% |
| PP con fibra de vidrio | 1,75kg | 24,1% |
| Tejido y piel          | 0,25kg | 3,5%  |
| Pintura/cromo          | 0,21kg | 3,0%  |
| Espuma PU              | 0,16kg | 2,2%  |
| PE                     | 0,01kg | 0,2%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Tabuerete medio con base de trineo

Código: VAR0660



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 4,41kg | 65,1% |
| PP con fibra de vidrio | 1,75kg | 25,7% |
| Tejido y piel          | 0,25kg | 3,7%  |
| Pintura/cromo          | 0,19kg | 2,9%  |
| Espuma PU              | 0,16kg | 2,4%  |
| PE                     | 0,01kg | 0,2%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Taburete alto con base giratoria de 4 radios de acero

Código: VAR0685



## COMPOSICIÓN




## Material


## Peso

|                        |        |       |
|------------------------|--------|-------|
| Acero                  | 3,02kg | 45,9% |
| PP con fibra de vidrio | 1,75kg | 26,5% |
| Aluminio               | 0,84kg | 12,7% |
| Acero + POM            | 0,36kg | 5,5%  |
| Tejido y piel          | 0,25kg | 3,9%  |
| Pintura/cromo          | 0,17kg | 2,6%  |
| Espuma PU              | 0,16kg | 2,5%  |
| PE                     | 0,02kg | 0,4%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Taburete medio con base giratoria de 4 radios de acero

Código: VAR0680




COMPOSICIÓN




| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 2,84kg 44,5% |
| PP con fibra de vidrio | 1,75kg 27,2% |
| Aluminio               | 0,84kg 13,1% |
| Acero + POM            | 0,36kg 5,7%  |
| Tejido y piel          | 0,25kg 4,0%  |
| Pintura/cromo          | 0,16kg 2,6%  |
| Espuma PU              | 0,16kg 2,6%  |
| PE                     | 0,02kg 0,3%  |

RECICLADO



RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Taburete alto con base de 4 patas de madera

Código: VAR0695MA




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 2,15kg 33,9% |
| PP con fibra de vidrio | 1,75kg 27,2% |
| Madera maciza          | 1,72kg 26,9% |
| Tejido y piel          | 0,25kg 4,0%  |
| TR                     | 0,25kg 4,0%  |
| Espuma PU              | 0,16kg 2,5%  |
| Níquel                 | 0,05kg 0,7%  |
| Pintura                | 0,05kg 0,7%  |
| PE                     | 0,02kg 0,1%  |

RECICLADO



RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Taburete medio con base de 4 patas de madera

Código: VAR0690MA




COMPOSICIÓN



| Material               | Peso         |
|------------------------|--------------|
| Acero                  | 2,15kg 35,1% |
| PP con fibra de vidrio | 1,75kg 28,2% |
| Madera maciza          | 1,49kg 24,2% |
| Tejido y piel          | 0,25kg 4,1%  |
| TR                     | 0,25kg 4,1%  |
| Espuma PU              | 0,16kg 2,6%  |
| Níquel                 | 0,05kg 0,8%  |
| Pintura                | 0,05kg 0,8%  |
| PE                     | 0,02kg 0,1%  |

RECICLADO



RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Larguero para banco de 2 plazas con patas

Código: VAR0720



## COMPOSICIÓN




## Material


## Peso

|              |        |       |
|--------------|--------|-------|
| Acero        | 3,70kg | 49,1% |
| Aluminio     | 3,45kg | 45,8% |
| Pintura      | 0,34kg | 4,5%  |
| PP           | 0,02kg | 0,3%  |
| PA6 + 30% PV | 0,02kg | 0,3%  |

## RECICLADO




## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Larguero para banco de 3 plazas con patas

Código: VAR0730



## COMPOSICIÓN




## Material


## Peso

|              |        |       |
|--------------|--------|-------|
| Acero        | 6,09kg | 60,7% |
| Aluminio     | 3,45kg | 34,4% |
| Pintura      | 0,45kg | 4,5%  |
| PP           | 0,02kg | 0,2%  |
| PA6 + 30% PV | 0,02kg | 0,2%  |

## RECICLADO



## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

## Larguero para banco de 4 plazas con patas

Código: VAR0740



## COMPOSICIÓN




## Material


## Peso

|              |        |       |
|--------------|--------|-------|
| Acero        | 8,46kg | 67,5% |
| Aluminio     | 3,45kg | 27,6% |
| Pintura      | 0,56kg | 4,5%  |
| PP           | 0,02kg | 0,2%  |
| PA6 + 30% PV | 0,02kg | 0,2%  |

## RECICLADO




## RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Larguero para banco de 5 plazas con patas

Código: VAR0750




COMPOSICIÓN




| Material     | Peso    |       |
|--------------|---------|-------|
| Acero        | 10,91kg | 72,3% |
| Aluminio     | 3,45kg  | 22,9% |
| Pintura      | 0,67kg  | 4,5%  |
| PP           | 0,02kg  | 0,2%  |
| PA6 + 30% PV | 0,02kg  | 0,2%  |

RECICLADO



RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Asiento para banco

Código: VAR0200TA




COMPOSICIÓN



| Material               | Peso   |       |
|------------------------|--------|-------|
| PP con fibra de vidrio | 2,45kg | 60,1% |
| Aluminio               | 0,91kg | 22,4% |
| Tejido y piel          | 0,33kg | 8,3%  |
| Espuma PU              | 0,27kg | 6,7%  |
| Acero                  | 0,06kg | 1,4%  |
| Pintura                | 0,04kg | 1,1%  |

RECICLADO



RECICLABILIDAD




Producto con certificación GREENGUARD Gold.

Encimera para banco (MDF)

Código: VAR0160MA



COMPOSICIÓN



| Material    | Peso   |       |
|-------------|--------|-------|
| Tablero MDF | 3,37kg | 97,1% |
| Acero       | 0,05kg | 1,5%  |
| Pintura     | 0,04kg | 1,2%  |
| Latón       | 0,01kg | 0,2%  |

RECICLADO




RECICLABILIDAD




Set de brazos metálicos para sillas con base giratoria

Código: VAR0100

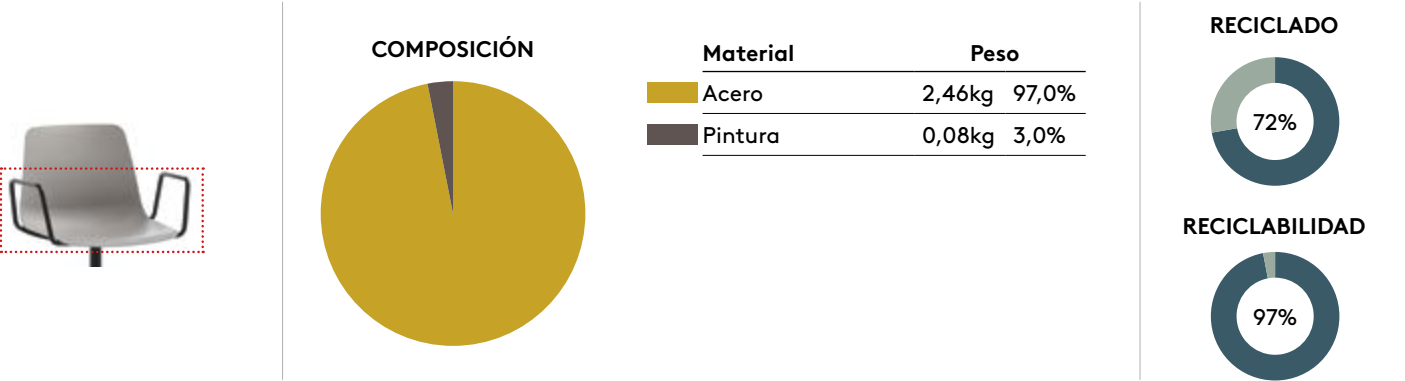


Set de brazos metálicos para sillas con base giratoria y elevación con gas

Código: VAR0102

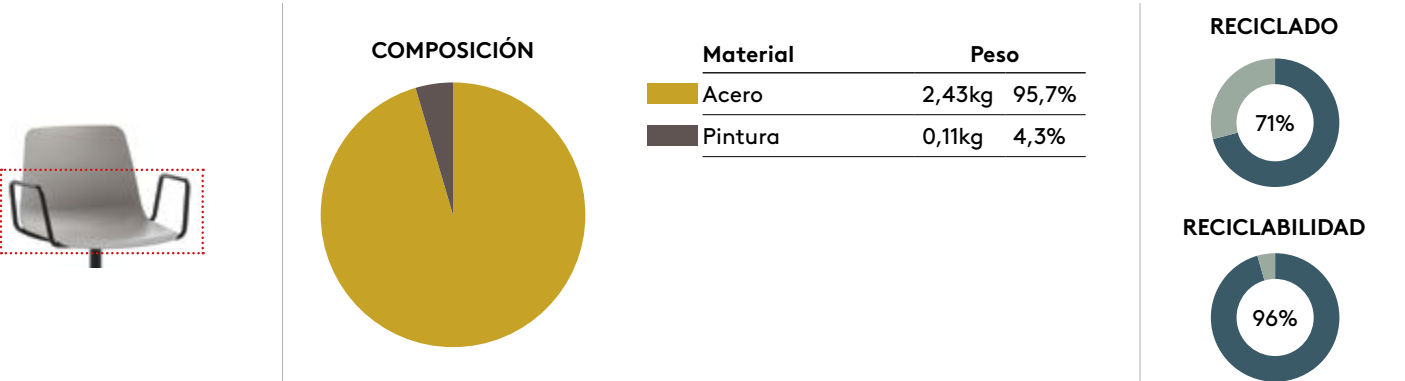

Brazo desmontable (derecho/izquierdo)

Código: VAR0636 / VAR0637

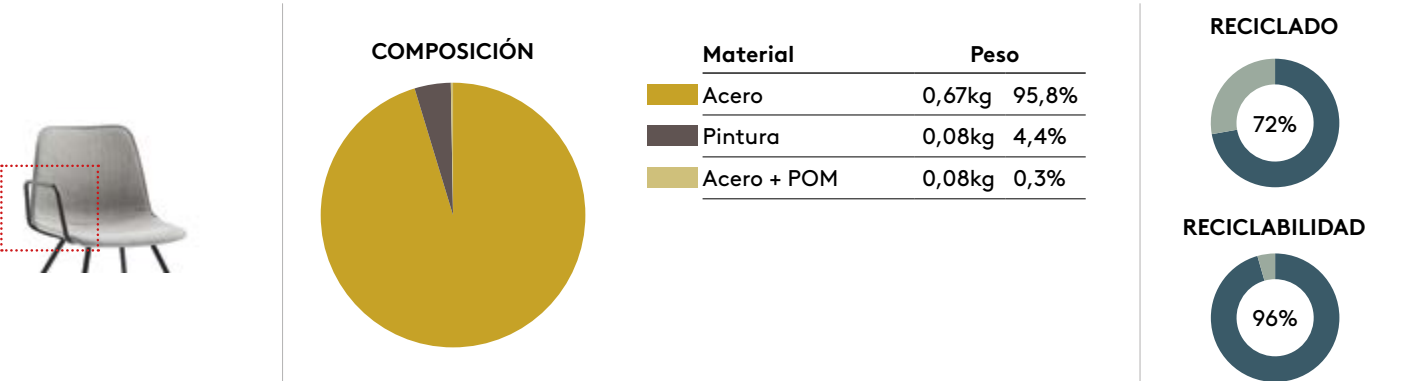

NOTAS

\*\*\* Los porcentajes dados en esta ficha pueden presentar ligeras variaciones debido a cambios en el proveedor de algunas materias primas y redondeo de cifras.

\*\*\* Los porcentajes de las encimeras varían según el material y acabado. Para conocer los porcentajes exactos de las encimeras, consulte la hoja de datos de las encimeras.

# CERTIFICATES OF COMPLIANCE



All GREENGUARD Gold Certified products are on [UL.SPOT](https://www.ul.com/spot).  
Please visit it for the latest update.

## **VARYA** TAPIZ designed — Simon Pengelly



INCLASS

## Aperçu



Chaise à 4 pieds  
(empilable)  
[certificat +](#)



Fauteuil à 4 pieds  
[certificat +](#)



Chaise avec piètement  
en tige d'acier  
[certificat +](#)



Fauteuil avec piètement  
en tige d'acier  
[certificat +](#)



Chaise à 4 pieds  
(non empilable)  
[certificat +](#)



Chaise à 4 pieds  
en bois  
[certificat +](#)



Chaise à 4 pieds  
en polypropylène  
[certificat +](#)



Chaise avec  
piètement luge  
[certificat +](#)



Fauteuil avec  
piètement luge  
[certificat +](#)



Chaise avec piètement  
giratoire à 4 branches  
[certificat +](#)



Chaise avec piètement  
giratoire à 4 branches  
en aluminium  
[certificat +](#)



Chaise avec piètement  
giratoire à 4 branches  
en aluminium avec  
roulettes  
[certificat +](#)



Chaise avec piètement  
giratoire à 5 branches  
en aluminium avec  
roulettes  
[certificat +](#)



Chaise à 4 pieds  
sur roulettes  
[certificat +](#)



Chaise à 4 pieds  
sur roulettes  
+ panier  
[certificat +](#)



Chaise haute  
à 4 pieds  
[certificat +](#)



Chaise hauteur  
comptoir à 4 pieds  
[certificat +](#)



Chaise haute avec  
piètement en tige d'acier  
[certificat +](#)



Chaise hauteur comptoir  
avec piètement en tige  
d'acier  
[certificat +](#)



Tabouret avec  
piètement en tige  
d'acier (haut)  
[certificat +](#)



Tabouret avec  
piètement en tige  
d'acier (moyen)  
[certificat +](#)



Tabouret avec  
piètement giratoire à  
4 branches (haut)  
[certificat +](#)



Tabouret avec  
piètement giratoire à  
4 branches (moyen)  
[certificat +](#)



Tabouret à 4 pieds  
(haut)  
[certificat +](#)



Tabouret à 4 pieds  
(moyen)  
[certificat +](#)



Tabouret à 4 pieds  
en bois (haut)  
[certificat +](#)



Tabouret à 4 pieds  
en bois (moyen)  
[certificat +](#)



Poutre  
[certificat +](#)

## Éléments & accessoires en option



Accoudoir amovible  
(droit/gauche)  
Convient uniquement  
aux chaises à 4 pieds  
sur roulettes  
[certificat +](#)



Jeu d'accoudoirs  
tubulaires  
Convient uniquement  
aux piètements  
pivotants  
[certificat +](#)



Accoudoir amovible  
avec tablette d'écriture  
(droit/gauche)  
Convient uniquement  
aux chaises à 4 pieds sur  
roulettes  
[certificat +](#)



Tablette d'écriture  
(droit/gauche)  
Convient uniquement  
aux chaises à 4 pieds et  
en tige d'acier  
[certificat +](#)

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 4 leg frame (stackable)

Restrictions: Excludes genuine leather option

227870-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Armchair with 4 leg frame

Restrictions: Excludes genuine leather option

227871-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with sled frame

Restrictions: Excludes genuine leather option

227875-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Armchair with sled frame

Restrictions: Excludes genuine leather option

227876-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Chair with 4 leg frame (non stackable)

Restrictions: Excludes genuine leather option

227872-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 4 wooden leg frame

Restrictions: Excludes genuine leather option

227873-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair 4 plastic leg frame

Restrictions: Excludes genuine leather option

227874-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with cantilever frame

Restrictions: Excludes genuine leather option

227877-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Armchair with cantilever frame

Restrictions: Excludes genuine leather option

227878-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 4 spoke steel swivel base

Restrictions: Excludes genuine leather option

227879-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 4 spoke aluminum swivel base

Restrictions: Excludes genuine leather option

227880-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Chair with 4 spoke aluminum swivel base with casters

Restrictions: Excludes genuine leather option

227881-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 5 spoke aluminum swivel base with casters

Restrictions: Excludes genuine leather option

227882-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Chair with 4 leg frame on casters

Restrictions: Excludes genuine leather option

227883-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Chair with 4 leg frame on  
casters + basket

Restrictions: Excludes genuine leather option

227884-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ High chair with 4 steel leg frame

Restrictions: Excludes genuine leather option

227893-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ Counter chair with 4 steel leg frame

Restrictions: Excludes genuine leather option

227894-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

### VARYA TAPIZ High chair with sled frame

Restrictions: Excludes genuine leather option

227895-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Stool with 4 spoke steel  
swivel frame (high)

227889-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



INCLASS

VARYA TAPIZ Stool with sled frame (high)

227887-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



INCLASS

VARYA TAPIZ Stool with sled frame  
(medium)

227888-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



INCLASS

VARYA TAPIZ Stool with sled frame (high)

227887-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Stool with 4 spoke steel  
swivel frame (medium)

227890-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



INCLASS

VARYA TAPIZ Stool with 4 leg frame (high)

227885-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Stool with 4 leg frame  
(medium)

227886-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Stool with 4 wooden leg  
(high)

227891-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA TAPIZ Stool with 4 wooden leg  
(medium)

227892-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



INCLASS

VARYA TAPIZ Seat for bench

Restrictions: Excludes genuine leather option

227897-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA 5 seater bench frame with legs  
(seats not included)

227852-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA 4 seater bench frame with legs  
(seats not included)

227853-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA 3 seater bench frame with legs  
(seats not included)

227854-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA 2 seater bench frame with legs  
(seats not included)

227855-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable<br>Predicted Concentration | Units             |
|-----------------------------------------|------------|----------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                         | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                               | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                        | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                          | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                           | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV                | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA Detachable arm (right/left) \*Only suitable for chairs with 4 leg frame on casters

227863-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA Set of tube arms \*Only suitable for swivel bases

227862-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA Detachable arm with writing tablet  
(right/left) \*Only suitable for chairs with 4  
leg frame on casters

227866-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA Writing tablet (right/left) \*Only  
suitable for 4 leg chairs

227864-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

# CERTIFICATE OF COMPLIANCE



## INCLASS

VARYA Writing tablet (right/left) \*Only  
suitable for sled base chairs

227865-420

Certificate Number

04/27/2021 - 04/27/2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



*UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.*

# CERTIFICATE OF COMPLIANCE

## GREENGUARD Certification Criteria for Office Furniture Seating

| Criteria                                | CAS Number | Maximum Allowable Predicted Concentration | Units             |
|-----------------------------------------|------------|-------------------------------------------|-------------------|
| TVOC <sup>(A)</sup>                     | -          | 0.22                                      | mg/m <sup>3</sup> |
| Formaldehyde                            | 50-00-0    | 4.5 (3.65 ppb)                            | µg/m <sup>3</sup> |
| Total Aldehydes <sup>(B)</sup>          | -          | 0.043                                     | ppm               |
| 4-Phenylcyclohexene                     | 4994-16-5  | 6.5                                       | µg/m <sup>3</sup> |
| 1-Methyl-2-pyrrolidinone <sup>(C)</sup> | 872-50-4   | 80                                        | µg/m <sup>3</sup> |
| Individual VOCs <sup>(D)</sup>          | -          | 1/4 CREL<br>or<br>1/100th TLV             | -                 |

<sup>(A)</sup> Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.

<sup>(B)</sup> The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.

<sup>(C)</sup> Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.

<sup>(D)</sup> Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.