

INCLASS

Distributeur SUISSE



REACTIV OFFICE DESIGN

+41 22 797 05 12

www.rod-design.ch



Rever

designed by Mario Ruiz



REVER

The collection

REVER



EN

The REVER armchairs are available with two backrest heights and three versions of the outer shell: fully upholstered, oak or walnut veneer. The four-spoke aluminum swivel base with self-return is available in a white, black or polished aluminum finish. The high armchairs include a height- and tilt-adjustable headrest and are available with a fixed or reclining backrest that can be locked in any position.

These characteristics make REVER a very versatile piece that can be transformed depending on the shell, the height of the backrest, the color of the base or the movement functions.

ES

Las butacas REVER están disponibles con dos alturas de respaldo y tres versiones de carcasa exterior: totalmente tapizada, en chapa de roble o de nogal. Por su parte, la base giratoria de aluminio de cuatro radios con retorno automático está disponible en acabado blanco, negro o aluminio pulido. Las butacas altas incluyen cabezera regulable en altura e inclinación y están disponibles con respaldo fijo o reclinable con bloqueo en cualquier posición.

Estas características convierten REVER en una pieza muy versátil que se transforma según sea la carcasa, la altura del respaldo, el color de la base o las funciones de movimiento.

FR

Les fauteuils REVER sont disponibles avec deux hauteurs de dossier et trois versions de la coque extérieure : entièrement tapissée, en chêne ou en placage de noyer. Le piètement pivotant à quatre branches en aluminium avec retour automatique est disponible en blanc, noir ou aluminium poli. Les fauteuils hauts comprennent un ppui-tête réglable en hauteur et en inclinaison et sont disponibles avec un dossier fixe ou inclinable avec blocage dans n'importe quelle position.

Ces caractéristiques font de REVER une pièce très polyvalente qui se transforme en fonction de la coque, de la hauteur du dossier, de la couleur de la base ou des fonctions de mouvement.

DE

Die Sessel sind mit zwei Rückenlehnenhöhen und drei Ausführungen der Außenschale erhältlich: vollständig gepolstert, in Eichenfurnier oder in Nussbaumfurnier. Das 4-Speichen-Drehgestell aus Aluminium mit automatischer Rückstellung ist in Weiß, Schwarz oder poliertem Aluminium erhältlich. Die hohen Sessel verfügen über eine höhen- und neigungsverstellbare Kopfstütze und sind mit fester oder verstellbarer Rückenlehne mit Feststellmöglichkeit in jeder Position erhältlich.

Diese Eigenschaften machen REVER zu einem äußerst vielseitigen Möbelstück, das sich je nach Sitzschale, Höhe der Rückenlehne, Farbe des Untergestells oder Bewegungsfunktionen verwandelt.





INCLASS



REVER

443





INCLASS



REVER

447

Features



REVER high-back chairs are available with a fixed or reclining backrest which can be locked in any position providing a high level of comfort.

Las butacas REVER con respaldo alto están disponibles con respaldo fijo o reclinable. El respaldo reclinable se puede bloquear en cualquier posición aportando un alto nivel de confort.

Recliner headrest / Reposacabezas reclinable



Height adjustable headrest / Reposacabezas regulable en altura





Design / Diseño

Designed by Mario Ruiz
www.marioruiz.es

Finishes / Acabados

EN

Upholstery: available in all the upholstery materials indicated in the finishes book.

Metal bases: in black micro-textured powder coat as standard. Polished finish or micro-textured powder coated in white are available upon request.

Outer wooden cover: in all the oak finishes of our swatch card.

ES

Tapicerías: disponible en todos los materiales de tapicería indicados en el libro de acabados.

Bases metálicas: en pintura de poliéster termoendurecida con acabado de micro-texturizado en color negro como estándar. Base de aleación de aluminio inyectado o con acabado micro-texturizado en color blanco disponibles bajo demanda.

Cubierta exterior de madera: en todos los acabados de roble del libro de acabados.



Overview



– Lounge armchair with high back
Sillón con respaldo alto




– Lounge armchair with medium back
Sillón con respaldo medio



– Ottoman
Otomán

Backrests versions / Versiones de respaldo



– Oak shell
Trasera roble



– Walnut shell
Trasera nogal



– Upholstered shell
Trasera tapizada

Base options / Opcione sde base



– Black
Negro



– White
Blanco



– Polished
Pulido



Many of the products of this collection are GREENGUARD Gold certified by UL Solutions.

Gran parte de los productos de esta colección, cuentan con el certificado GREENGUARD Gold de UL Solutions.



DÉCLARATION ENVIRONNEMENTALE

INCLASS investit constamment dans de nouvelles solutions dans le but de préserver la santé et l'environnement. Cette gamme de produits a été conçue en tenant compte d'une série de critères écologiques, de santé et de durabilité.

Tous nos produits sont fabriqués localement dans notre usine de production certifiée ISO 9001 et ISO 14001. Pour cela, INCLASS est audité annuellement par Bureau Veritas, leader mondial des services de certification. Le système de gestion environnementale ISO 14001 est le plus reconnu au monde.

Tous les articles sont conçus en minimisant le nombre de composants et en maximisant le nombre de pièces interchangeables. INCLASS privilégie l'utilisation de matériaux recyclables et respectueux de l'environnement, ainsi que des processus de production propres. L'entreprise classe, sépare et recycle tous les déchets générés dans son usine de production selon des procédures certifiées strictes.

Pour éviter les déchets inutiles et minimiser l'utilisation d'énergie et de ressources naturelles, les produits INCLASS sont conçus avec une esthétique intemporelle, loin des tendances à court terme, pour être durables. Les produits sont testés dans des laboratoires indépendants pour s'assurer qu'ils répondent aux normes internationales strictes de qualité, de sécurité et de durabilité.

INCLASS s'engage à fabriquer des produits qui contribuent à créer des environnements plus sains, plus sûrs et plus durables. L'entreprise investit et travaille continuellement pour remplacer les produits chimiques dangereux ou nocifs dans ses produits à mesure que de nouvelles alternatives plus sûres et plus vertes émergent. En conséquence, bon nombre de nos produits sont certifiés GREENGUARD Gold par Underwriters Laboratories. Il est scientifiquement prouvé que les produits certifiés GREENGUARD respectent l'une des normes d'émissions chimiques tierces les plus rigoureuses au monde, contribuant ainsi à réduire la pollution de l'air intérieur et le risque d'exposition à des produits chimiques nocifs. Les produits avec cette certification contribuent également à l'obtention de la qualification bâtiment écologique, avec LEED, BREEAM, FITWEL et autres, en plus de répondre aux exigences de qualité de l'air intérieur (RFP). Les produits indiqués sont certifiés GREENGUARD Gold.

Avec tout cela, INCLASS montre son engagement total envers la santé, l'environnement et l'excellence envers le client.

CERTIFICATIONS



MATÉRIAUX

INCLASS est fermement engagé dans la production de produits respectueux de l'environnement et qui contribuent à créer des espaces sûrs et sains. Notre entreprise s'efforce constamment de réduire et d'éliminer les produits chimiques dangereux ou nocifs dans tous nos produits et processus, et dans une recherche continue d'alternatives meilleures et plus sûres qui arrivent sur le marché. Ces efforts comprennent, sans s'y limiter :

L'utilisation de colles à base d'eau qui ne contiennent pas de solvants.

Collaborer avec des fournisseurs qui garantissent que leur bois est issu de forêts durables.

L'utilisation de pièces de bois composites conformes aux normes CARB ATCM Phase II et TSCA Titre VI pour les faibles émissions de formaldéhyde.

Encourager l'utilisation de tissus naturels et de tissus labellisés OEKO-TEX® ou ECOLABEL.

L'utilisation de mousses de rembourrage exemptes de chlorofluorocarbures (CFC) et d'hydrochlorofluorocarbures (HCFC).

Partout où les normes de qualité le permettent, les produits contiennent des matières premières recyclées.

La plupart de nos produits peuvent être complètement séparés pour un recyclage approprié.


ECO PASSPORT DU PRODUIT

Fauteuil lounge à dossier moyen,
coque extérieure en contre-plaqué et piètement pivotant à 4 branches en aluminium

Code: REV0010 / REV0020




COMPOSITION



Matériel	Poids
Contre-plaqué	8,35kg 37,7%
Acier	6,45kg 29,1%
Aluminium	2,94kg 13,3%
Mousse injectée PU	2,35kg 10,6%
PU foam	0,64kg 2,9%
Tissu et cuir	0,60kg 2,7%
Ouate	0,50kg 2,5%
Peinture	0,13kg 0,6%
Laiton	0,03kg 0,2%
PA	0,03kg 0,2%
PP	0,01kg 0,1%
PET	0,01kg 0,1%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Fauteuil lounge à dossier moyen,
coque extérieure tapissée et piètement pivotant à 4 branches en aluminium

Code: REV0030




COMPOSITION



Matériel	Poids
Contre-plaqué	8,69kg 38,1%
Acier	6,45kg 28,2%
Aluminium	2,94kg 12,9%
Mousse injectée PU	2,35kg 10,3%
Tissu et cuir	0,96kg 4,2%
PU foam	0,64kg 2,8%
Ouate	0,56kg 2,4%
Peinture	0,13kg 0,5%
Laiton	0,03kg 0,2%
PA	0,03kg 0,2%
PP	0,01kg 0,1%
PET	0,01kg 0,1%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Fauteuil lounge à dossier haut,
coque extérieure en contre-plaqué et piètement pivotant à 4 branches en aluminium

Code: REV0110 / REV0120




COMPOSITION



Matériel	Poids
Contre-plaqué	9,02kg 35,3%
Acier	8,30kg 32,5%
Mousse injectée PU	3,15kg 12,3%
Aluminium	2,94kg 11,5%
Tissu et cuir	0,72kg 2,8%
PU foam	0,66kg 2,6%
Ouate	0,52kg 2,0%
Peinture	0,13kg 0,5%
Laiton	0,06kg 0,2%
PA	0,03kg 0,1%
PP	0,01kg 0,1%
PET	0,01kg 0,1%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Fauteuil lounge à dossier haut,
coque extérieure tapissée et piètement pivotant à 4 branches en aluminium


Code: **REV0130**

COMPOSITION



Matériel	Poids	
Contre-plaqué	9,86kg	36,7%
Acier	8,30kg	30,9%
Mousse injectée PU	3,15kg	11,7%
Aluminium	2,94kg	10,9%
Tissu et cuir	1,18kg	4,4%
PU foam	0,66kg	2,5%
Ouate	0,52kg	1,9%
Peinture	0,13kg	0,5%
Laiton	0,06kg	0,2%
PA	0,03kg	0,1%
PP	0,01kg	0,1%
PET	0,01kg	0,1%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Fauteuil lounge à dossier haut inclinable,
coque extérieure en contre-plaqué et piètement pivotant à 4 branches en aluminium


Code: **REV0210 / REV0220**

COMPOSITION



Matériel	Poids	
Contre-plaqué	9,02kg	34,3%
Acier	8,99kg	34,1%
Mousse injectée PU	3,15kg	12,0%
Aluminium	2,94kg	11,2%
Tissu et cuir	0,72kg	2,7%
PU foam	0,66kg	2,5%
Ouate	0,52kg	2,0%
Peinture	0,14kg	0,5%
PA	0,08kg	0,3%
Laiton	0,06kg	0,2%
PP	0,01kg	0,1%
PET	0,01kg	0,1%

RECYCLAGE



RECYCLABILITÉ




Produit certifié GREENGUARD Gold.

Fauteuil lounge à dossier haut inclinable,
coque extérieure tapissée et piètement pivotant à 4 branches en aluminium


Code: **REV0230**

COMPOSITION



Matériel	Poids	
Contre-plaqué	9,86kg	35,7%
Acier	8,99kg	32,5%
Mousse injectée PU	3,15kg	11,4%
Aluminium	2,94kg	10,6%
Tissu et cuir	1,18kg	4,3%
PU foam	0,66kg	2,4%
Ouate	0,52kg	1,9%
Peinture	0,14kg	0,5%
PA	0,08kg	0,3%
Laiton	0,06kg	0,2%
PP	0,01kg	0,1%
PET	0,01kg	0,1%

RECYCLAGE




RECYCLABILITÉ



Produit certifié GREENGUARD Gold.


Pouf avec coque extérieure en contre-plaqué et piètement en aluminium à 4 branches

Code: REV0310 / REV0320

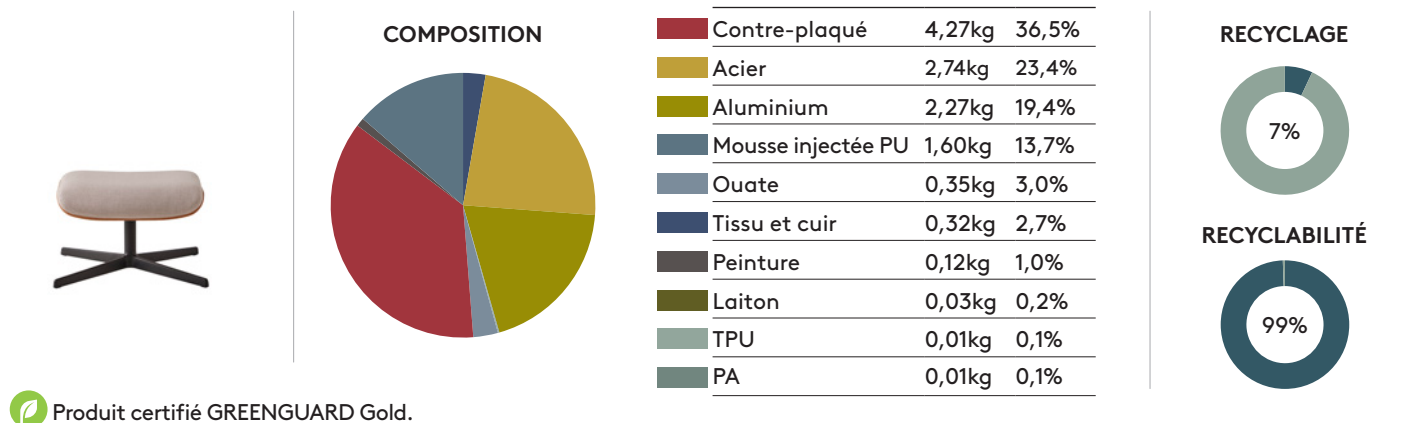

Pouf avec coque extérieure tapissée et piètement en aluminium à 4 branches

Code: REV0330

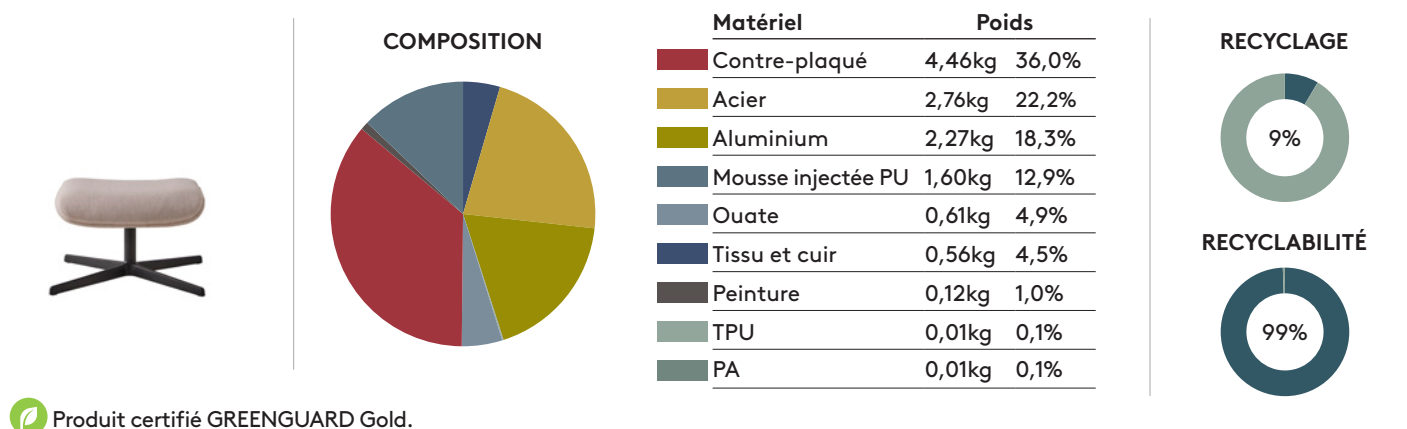

REMARQUES

*** Les pourcentages indiqués dans cette fiche peuvent présenter de légères variations dues aux changements de fournisseur de certaines matières premières et aux arrondis des chiffres.

*** Les pourcentages pour les plateaux varient selon le matériau et la finition. Pour les pourcentages exacts des plateaux, consultez la fiche technique du plateau.



Conçu par Mario Ruiz, REVER est un fauteuil élégant, intemporel et très confortable, capable de fonctionner comme une pièce maîtresse dans l'espace de travail, accompagnant et améliorant la concentration grâce à son confort superlatif et, en même temps, coexistant dans l'espace domestique comme un élément essentiel dans la construction d'un intérieur paisible, avec du caractère et très accueillant.

Réalisée avec des matériaux de qualité, la collection REVER comprend des chaises longues, disponibles en deux hauteurs de dossier, qui peuvent également être combinées avec un repose-pieds assorti.

ÉCOLOGIE

Fiche environnementale du produit [+info](#)

Les processus de production d'INCLASS sont certifiés selon les normes environnementales ISO 14001 afin de minimiser tout impact sur l'environnement. Certificat ISO 14001 [+info](#)

 Les produits marqués avec le point vert ont obtenu la certification Greenguard Gold dans toutes leurs versions tapissées avec tous les tissus de notre nuancier, à l'exception des groupes G10 et G11. Certification GREENGUARD Gold [+info](#)

NORMES DE QUALITÉ

Le système de gestion de la qualité de INCLASS est certifié conformément à la norme ISO 9001 dans la conception, fabrication et les procédures de vente de ses produits.
Certificat ISO 9001 [+info](#)

UNE-EN 16139:2013vc2015 - Mobilier - Résistance, durabilité et sécurité - Exigences applicables aux sièges à usage collectif.

ANSI/BIFMA X5.4:2020 - Assise publique ou lounge.

*Les produits INCLASS ont été largement testés pour dépasser les normes de test de l'industrie à AIDIMME.
AIDIMME est membre du réseau européen INNOVAWOOD et ses laboratoires d'essais sont accrédités par l'ENAC.*

GARANTIE 5 ANS

Conditions de garantie [+info](#)

FINITIONS

Tapiserie: à choisir parmi les tissus et les cuirs de notre nuancier.

Nuancier des finitions [+info](#)

Piètements en aluminium



W01



B00



Poli

Coque en bois

Chêne



Naturel



Noyer
teinté



Wenge
teinté



Noir
teinté

Noyer



Naturel

Fauteuil lounge à dossier haut, coque extérieure en placage chêne et piètement pivotant à 4 branches en aluminium
Code : **REV0110**

Fauteuil lounge tapissé avec dossier haut et coque extérieure en placage de chêne. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Coque extérieure en bois : en contreplaqué de chêne. Disponible dans toutes les finitions chêne de notre nuancier.



Tapiserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.

 Produit certifié GREENGUARD Gold.



25,6kg



1 unité
31,1 kg
0,83 m³

COM 140cm / par unité

1 unité	230cm
---------	-------

8 o plus unités	214,5cm
-----------------	---------

*COM seront considérés comme G2

Fauteuil lounge à dossier haut inclinable, coque extérieure en placage chêne et piètement pivotant à 4 branches en aluminium
Code : **REV0210**

Fauteuil lounge tapissé avec dossier haut inclinable et coque extérieure en placage de chêne. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Coque extérieure en bois : en contreplaqué de chêne. Disponible dans toutes les finitions chêne de notre nuancier.

Tapiserie : à choisir parmi les tissus et cuirs du nuancier.



Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.

Dossier inclinable : peut être verrouillé dans n'importe quelle position.

 Produit certifié GREENGUARD Gold.



26kg



1 unité
31,5 kg
0,83 m³

COM 140cm / par unité

1 unité	230cm
---------	-------

8 o plus unités	214,5cm
-----------------	---------

*COM seront considérés comme G2

Fauteuil lounge à dossier moyen, coque extérieure en placage chêne et piètement pivotant à 4 branches en aluminium
Code : **REV0010**

Fauteuil lounge tapissé avec dossier moyen et coque extérieure en placage de chêne. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Coque extérieure en bois : en contreplaqué de chêne. Disponible dans toutes les finitions chêne de notre nuancier.



Tapiserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.



Produit certifié GREENGUARD Gold.



22,9kg



1 unité
28,4 kg
0,71 m³

COM 140cm / par unité

1 unité	187cm
---------	-------

8 o plus unités	178,5cm
-----------------	---------

*COM seront considérés comme G2

Pouf avec coque extérieure en placage de chêne et piètement en aluminium à 4 branches
Code : **REV0310**

Pouf tapissé avec coque extérieure en placage de chêne. Piètement en aluminium à quatre branches avec colonne fixe. La hauteur du siège n'est pas réglable.

Assise : structure interne en contreplaqué recouvert de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et de fibres souples.

Coque extérieure en bois : en contreplaqué de chêne. Disponible dans toutes les finitions chêne de notre nuancier.




Tapiserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.



Produit certifié GREENGUARD Gold.



10,9kg



1 unité
12,9 kg
0,23 m³

COM 140cm / par unité

1 unité	85cm
---------	------

8 o plus unités	100,5cm
-----------------	---------

*COM seront considérés comme G2

Fauteuil lounge à dossier haut, coque extérieure en placage noyer et piètement pivotant à 4 branches en aluminium
Code : **REV0120**

Fauteuil lounge tapissé avec dossier haut et coque extérieure en placage de noyer. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Coque extérieure en bois : en contreplaqué de noyer. Disponible dans toutes les finitions noyer de notre nuancier.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.



Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.



Produit certifié GREENGUARD Gold.



25,6kg



1 unité
31,1 kg
0,83 m³

COM 140cm / par unité

1 unité 230cm

8 o plus unités 214,5cm

*COM seront considérés comme G2

Fauteuil lounge à dossier haut inclinable, coque extérieure en placage noyer et piètement pivotant à 4 branches en aluminium
Code : **REV0220**

Fauteuil lounge tapissé avec dossier haut inclinable et coque extérieure en placage de noyer. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Coque extérieure en bois : en contreplaqué de noyer. Disponible dans toutes les finitions noyer de notre nuancier.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.



Patins : patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.

Dossier inclinable : peut être verrouillé dans n'importe quelle position.



Produit certifié GREENGUARD Gold.



26kg



1 unité
31,5 kg
0,83 m³

COM 140cm / par unité

1 unité 230cm

8 o plus unités 214,5cm

*COM seront considérés comme G2

Fauteuil lounge à dossier moyen, coque extérieure en placage noyer et piètement pivotant à 4 branches en aluminium
Code : **REV0020**

Fauteuil lounge tapissé avec dossier moyen et coque extérieure en placage de noyer. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.




Coque extérieure en bois : en contreplaqué de noyer. Disponible dans toutes les finitions noyer de notre nuancier.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



COM 140cm / par unité	
1 unité	187cm
8 o plus unités	178,5cm
*COM seront considérés comme G2	

Pouf avec coque extérieure en placage de noyer et piètement en aluminium à 4 branches
Code : **REV0320**

Pouf tapissé avec coque extérieure en placage de noyer. Piètement en aluminium à quatre branches avec colonne fixe. La hauteur du siège n'est pas réglable.

Assise : structure interne en contreplaqué recouvert de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et de fibres souples.




Coque extérieure en bois : en contreplaqué de noyer. Disponible dans toutes les finitions noyer de notre nuancier.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



COM 140cm / par unité	
1 unité	85cm
8 o plus unités	100,5cm
*COM seront considérés comme G2	

Fauteuil lounge à dossier haut, coque extérieure tapissée et piètement pivotant à 4 branches en aluminium
Code : **REV0130**

Fauteuil lounge tapissé avec dossier haut et coque extérieure tapissée. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Tapiserie : à choisir parmi les tissus et cuirs du nuancier.



Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.



Produit certifié GREENGUARD Gold.



25,6kg



1 unité
31,1 kg
0,83 m³

COM 140cm / par unité

1 unité 345,5cm

8 o plus unités 351cm

*COM seront considérés comme G2

Fauteuil lounge à dossier haut inclinable, coque extérieure tapissée et piètement pivotant à 4 branches en aluminium
Code : **REV0230**

Fauteuil lounge tapissé avec dossier haut inclinable et coque extérieure tapissée. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.

Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Tapiserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.



Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

Appui-tête : réglable en hauteur et en inclinaison.

Dossier inclinable : peut être verrouillé dans n'importe quelle position.



Produit certifié GREENGUARD Gold.



26kg



1 unité
31,5 kg
0,83 m³

COM 140cm / par unité

1 unité 345,5cm

8 o plus unités 351cm

*COM seront considérés comme G2

Fauteuil lounge à dossier moyen, coque extérieure tapissée et piètement pivotant à 4 branches en aluminium
Code : **REV0030**

Fauteuil lounge tapissé avec dossier moyen et coque extérieure tapissée. Piètement en aluminium à quatre branches avec colonne à retour automatique. La hauteur du siège n'est pas réglable.




Assise et dossier : structure interne en acier recouverte de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et recouverte de fibre souple.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



COM 140cm / par unité	
1 unité	271cm
8 o plus unités	304cm
*COM seront considérés comme G2	

Pouf avec coque extérieure tapissée et piètement en aluminium à 4 branches
Code : **REV0330**

Pouf tapissé avec coque extérieure tapissée. Piètement en aluminium à quatre branches avec colonne fixe. La hauteur du siège n'est pas réglable.




Assise : structure interne en contreplaqué recouvert de mousse de polyuréthane injectée d'une densité de 50 kg/m³ et de fibres souples.

Tapisserie : à choisir parmi les tissus et cuirs du nuancier.

Piètement : en aluminium injecté. Finition en thermolaqué micro-texturé en noir en standard.

Patins: patins en plastique de série. Des patins avec feutre sont disponibles avec un supplément.

 Produit certifié GREENGUARD Gold.



COM 140cm / par unité	
1 unité	142cm
8 o plus unités	103,5cm
*COM seront considérés comme G2	

ÉLÉMENTS & ACCESSOIRES EN OPTION

	Code	Description
	REV0400	Piètement aluminium poli pour fauteuil lounge (supplément)
	REV0410	Piètement aluminium poli pour pouf (supplément)
	REV0400	Piètement aluminium blanc pour fauteuil lounge (supplément)
	REV0410	Piètement aluminium blanc pour pouf (supplément)
	REV0430OP	4 patins en feutre pour piètement pivotant en aluminium (supplément)

CERTIFICATES OF COMPLIANCE



All GREENGUARD Gold Certified products are on [UL.SPOT](https://www.ul.com/spot).
Please visit it for the latest update.

REVER

designed — Mario Ruiz



INCLASS

Aperçu



Fauteuil lounge pivotant à dossier haut inclinable et coque extérieure en placage chêne
REV0110 [certificat +](#)



Fauteuil lounge pivotant à dossier haut inclinable et coque extérieure en placage chêne
REV0210 [certificat +](#)



Fauteuil lounge pivotant à dossier moyen et coque extérieure en placage chêne
REV0010 [certificat +](#)



Pouf avec coque externe en chêne
REV0310 [certificat +](#)



Fauteuil lounge pivotant à dossier haut et coque extérieure en placage noyer
REV0120 [certificat +](#)



Fauteuil lounge pivotant à dossier haut inclinable et coque extérieure en placage noyer
REV0220 [certificat +](#)



Fauteuil lounge pivotant à dossier moyen et coque extérieure en placage noyer
REV0020 [certificat +](#)



Pouf avec coque externe en noyer
REV0320 [certificat +](#)



Fauteuil lounge pivotant avec dossier haut et coque extérieure tapissée
REV0130 [certificat +](#)



Fauteuil lounge pivotant à dossier haut inclinable et coque extérieure tapissée
REV0230 [certificat +](#)



Fauteuil lounge pivotant à dossier moyen et coque extérieure tapissée
REV0030 [certificat +](#)



Pouf avec coque externe tapissée
REV0330 [certificat +](#)

CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with high back, outer shell in oak veneer and 4 spoke aluminum swivel base

323698-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with
reclining high back, outer shell in
oak veneer and 4 spoke aluminum
swivel base

323707-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with
medium back, outer shell in oak
veneer and 4 spoke aluminum
swivel base

323708-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Ottoman with outer shell in
oak veneer and 4 spoke aluminum
base

323709-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with high back, outer shell in walnut veneer and 4 spoke aluminum swivel base

323710-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with
reclining high back, outer shell in
walnut veneer and 4 spoke
aluminum swivel base

323711-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with medium back, outer shell in walnut veneer and 4 spoke aluminum swivel base

323712-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Ottoman with outer shell in
walnut veneer and 4 spoke
aluminum base

323713-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with high back, upholstered outer shell and 4 spoke aluminum swivel base

323714-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with
reclining high back, upholstered
outer shell and 4 spoke aluminum
swivel base

323715-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Lounge armchair with
medium back, upholstered outer
shell and 4 spoke aluminum swivel
base

323716-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



CERTIFICATE OF COMPLIANCE



INCLASS

REVER Ottoman with upholstered
outer shell and 4 spoke aluminum
base

323717-420

Certificate Number

27 Feb 2024 - 27 Apr 2025

Certificate Period

Certified

Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011(R2016) and determined to comply with ANSI/BIFMA X7.1-2011(R2016) and ANSI/BIFMA e3-2019 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment with a ventilation rate of 24.8 m³/hour. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017.

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.



GREENGUARD Gold Certification Criteria for Furniture and Mattresses

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m ³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
1-Methyl-2-pyrrolidinone ^(C)	872-50-4	160	µg/m ³
Individual VOCs ^(D)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

