

PRODUCT SHEET / 2023 04 17

# Ribbon-Wood

REACTIV OFFICE DESIGN

Ch J-Ph de Sauvage 37

Bâtiment "Verntissa"

1219 Châtelaine (GE)

Tel: +41 (0)22 797 05 12

Port: +41 (0)79 159 77 60

A photograph of a modern office reception area. The walls are covered in dark, vertically-oriented wood slats. A reception desk, also finished with the same wood slats, is on the left. A large window on the right shows an outdoor area with a tree in a black pot. The word "Reception" is overlaid in white, glowing text in the center of the image.

Reception

# Ribbon-Wood

Ribbon-Wood is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. A large selection of veneers from our own production, as well as several options among surface treatments, together with black and light gray Recosilent means that the options are many for you to find a rib panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

## RIBBON-WOOD

Ribbon-Wood is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

## INFORMATION

Surface layer	0.6mm FSC certified veneer.
Surface treatment	Stained or untreated.
Sheet material	12 mm standard or solid black MDF
Acoustic blanket	RecoSilent (RS), 9mm recycled PET. Black or light gray.
Thickness	22 mm
Sizes	2400x600mm or 2960x600mm. Can be cut for extra.
Mounting	Screw (15pcs / panel) or glued (0.5 / panel) easily in place.
Manufacturing	Tranås and Glimåkra

## SUSTAINABILITY

Ribbon-Wood uses only wood for veneers from sustainably managed forests in accordance with the FSC's guidelines. The product meets Möbelfakta's requirements for the environment and responsible supply chains.

## PRESCRIPTION TEXT

Ribbon-Wood, Classic Oak black RecoSilent, 2400x600mm

## FIRE PROPERTIES

Standard range:

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	D-s2,d0

FR (FR = Fireclass)

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	B-s1,d0 or B-s2,d0




Prescription text at FR: Ribbon-Wood, Article name + FR

Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR

## CERTIFICATE

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09 (Acoustics workshop, laboratory accredited by Swedack)


Mounting directly to wall	Report 21-755-M1	w 0.35 (MH) Absorption class D
Mounting with 45mm air gap	Report 21-755-M2	w 0.6 (MH) Absorption class C
Mounting with 45mm mineral wool	Report 21-755-M3	w 1.0 Absorption class A

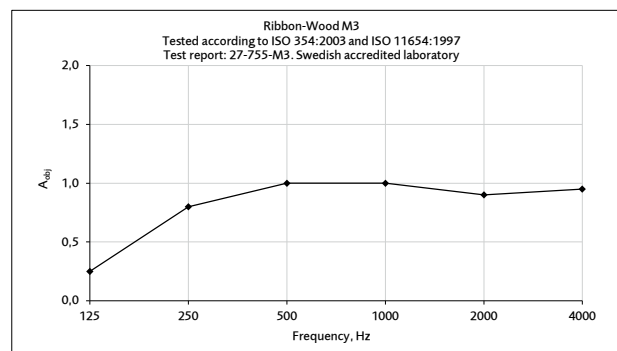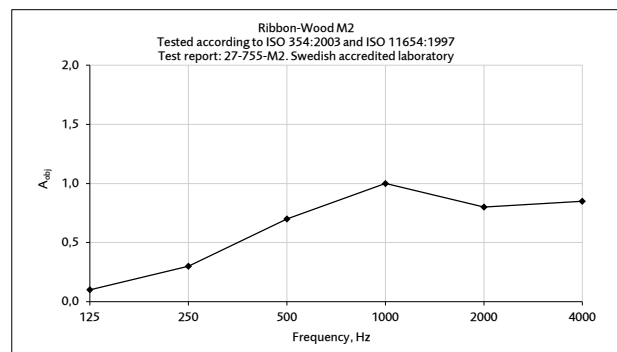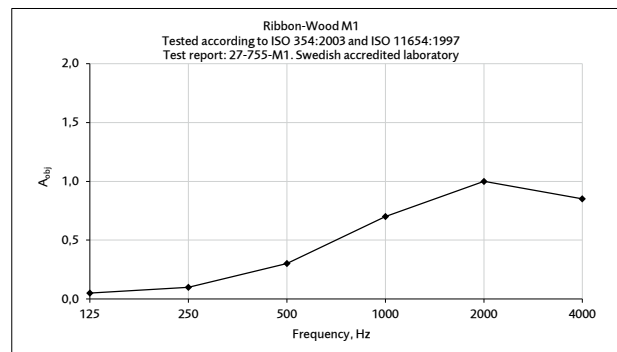


Equivalent absorption area per m<sup>2</sup> screen area (m<sup>2</sup>S / m<sup>2</sup>)

# Ribbon-Wood


## MEASURE

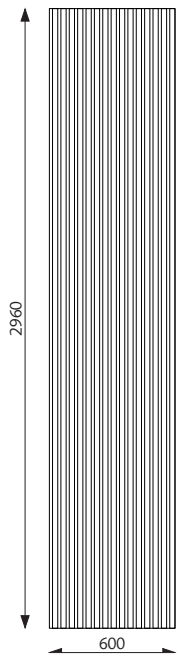


Weight 13kg  
Area 1.78m<sup>2</sup>

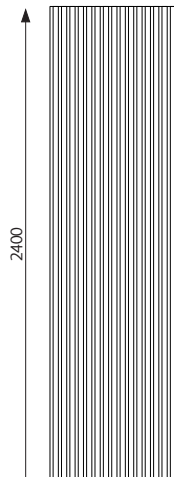


Weight 11kg  
Area 1.44m<sup>2</sup>

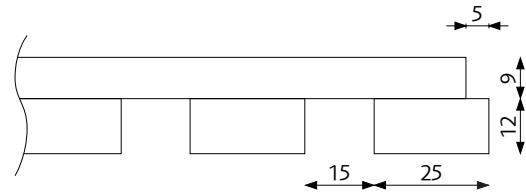

Default panel

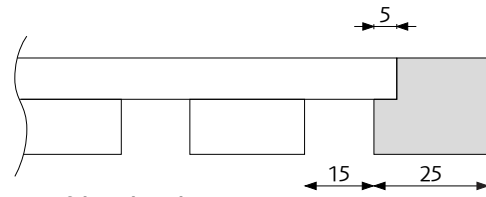


Cut felt with end strip

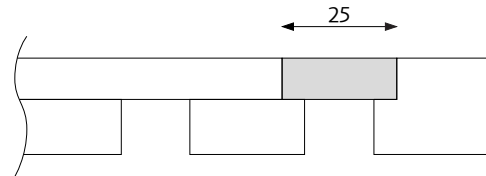

End strip with splicing strip

## OUR STANDARD RANGE



Black Diamond Ash,  
RS black



Classic Ash,  
RS gray




Classic Ash,  
RS black



Classic Oak,  
RS gray



Classic Oak,  
RS black



Rustic Grey Oak,  
RS black



Rustic Natural Oak,  
RS black



Rustic Antique Oak  
RS black



Rustic Smoked Oak,  
RS black



Walnut,  
RS black



End slat



Felt strip

# Ribbon-Wood

